

## Protector® Series

## PROTECTOR® SERIES Standby Generators Liquid-Cooled Gaseous Engine

### INCLUDES:

- Two-Line LCD Multilingual Digital Evolution™ Controller (English/Spanish/French/Portuguese) With External Viewing Window for Easy Indication of Generator Status and Breaker Position
- Isochronous Electronic Governor
- Sound Attenuated Enclosure
- Closed Coolant Recovery System
- Smart Battery Charger
- UV/Ozone Resistant Hoses
- ±1% Voltage Regulation
- Field Convertible Fuel Type With No Mechanical Adjustment Required.
- 5 Year Limited Warranty
- UL 2200 Listed
- Listed and labeled by the Southwest Research Institute allowing installation as close as 18 in (457 mm) to a structure\*

\*Must be located away from doors, windows, and fresh air intakes and in accordance with local codes. Pending Laboratory Testing for RG060 and RG080.

[https://assets.swri.org/library/DirectoryOfListedProducts/ConstructionIndustry/973\\_DoC\\_204\\_13204-01-01\\_Rev9.pdf](https://assets.swri.org/library/DirectoryOfListedProducts/ConstructionIndustry/973_DoC_204_13204-01-01_Rev9.pdf)

### Standby Power Rating

Model RG048 (Aluminum - Bisque) - 48 kW 60 Hz

Model RG060 (Aluminum - Bisque) - 60 kW 60 Hz

Model RG080 (Aluminum - Bisque) - 80 kW 60Hz



QUIET-TEST



\*Assembled in the USA using domestic and foreign parts

Meets EPA Emission Regulations  
RG048 is CA / MA Emission Compliant

## FEATURES

- **INNOVATIVE DESIGN & PROTOTYPE TESTING** are key components of GENERAC'S success in "IMPROVING POWER BY DESIGN." But it doesn't stop there. Total commitment to component testing, reliability testing, environmental testing, destruction and life testing, plus testing to applicable CSA, NEMA, EGSA, and other standards, allows you to choose GENERAC POWER SYSTEMS with the confidence that these systems will provide superior performance.
- **TEST CRITERIA:**
  - ✓ **PROTOTYPE TESTED**
  - ✓ **SYSTEM TORSIONAL TESTED**
  - ✓ **NEMA MG1-22 EVALUATION**
  - ✓ **MOTOR STARTING ABILITY**
- **MOBILE LINK® CONNECTIVITY:** Free with select Protector Series standby generator sets, Mobile Link Wi-Fi allows users to monitor the generator set status from anywhere in the world using a smartphone, tablet, or PC. Easily access information such as the current operating status and maintenance alerts. Users can connect an account to an authorized service dealer for fast, friendly, and proactive service. With Mobile Link, users are taken care of before the next power outage.
- **SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION.** This state-of-the-art power maximizing regulation system is standard on all Generac models. It provides optimized FAST RESPONSE to changing load conditions and MAXIMUM MOTOR STARTING CAPABILITY by electronically torque-matching the surge loads to the engine. Digital voltage regulation at ±1%.
- **SINGLE SOURCE SERVICE RESPONSE** from Generac's extensive dealer network provides parts and service know-how for the entire unit, from the engine to the smallest electronic component.
- **GENERAC TRANSFER SWITCHES.** Long life and reliability are synonymous with GENERAC POWER SYSTEMS. One reason for this confidence is the GENERAC product line is offered with its own transfer systems and controls for total system compatibility.

### 48 / 60 / 80 kW

#### GENERATOR SPECIFICATIONS

	48 kW	60 / 80 kW
Type	Synchronous	Synchronous
Rotor Insulation Class	F	H
Stator Insulation Class	H	H
Telephone Interference Factor (TIF)	<50	<50
Alternator Output Leads 1-Phase	4 wire	4 wire
Alternator Output Leads 3-Phase	6 wire	6 wire
Bearings	Sealed Ball	Sealed Ball
Coupling	Flexible Disc	Flexible Disc
Excitation System	Direct	Direct

#### VOLTAGE REGULATION

Type	Electronic
Sensing	Single Phase
Regulation	± 1%

#### GOVERNOR SPECIFICATIONS

Type	Electronic
Frequency Regulation	Isochronous
Steady State Regulation	± 0.25%

#### ELECTRICAL SYSTEM

Battery Charge Alternator	12 Volt 30 Amp
Static Battery Charger	2.5 Amp
Recommended Battery (battery not included)	Group 27F (48kW), 725CCA
System Voltage	12 Volts

#### GENERATOR FEATURES

Revolving field heavy duty generator Directly connected to the engine Operating temperature rise 120 °C above a 40 °C ambient Class H insulation is NEMA rated Class F insulation is NEMA rated All models fully prototyped tested
---

#### ENCLOSURE FEATURES

Aluminum weather protective enclosure	Ensures protection against mother nature. Electrostatically applied textured epoxy paint for added durability.
Enclosed critical grade muffler	Quiet, critical grade muffler is mounted inside the unit to prevent injuries.
Small, compact, attractive	Makes for an easy, eye appealing installation.
SAE	Sound attenuated enclosure ensures quiet operation.

#### ENGINE SPECIFICATIONS

	48 kW	60 / 80 kW
Make	Generac	Generac
Model	Inline 4 cylinder	Inline 4 cylinder
Cylinders	4	4
Displacement (Liters)	4.5	4.5
Bore (in/mm)	4.5 / 114.3	4.5 / 114.3
Stroke (in/mm)	4.25 / 107.95	4.25 / 107.95
Compression Ratio	9.9:1	8.85:1
Intake Air System	Naturally Aspirated	Turbocharged and aftercooled
Lifter Type	Hydraulic	Hydraulic

#### ENGINE LUBRICATION SYSTEM

Oil Pump Type	Gear
Oil Filter Type	Full Flow Spin-On Cartridge
Crankcase Capacity (qt / l)	11.6 / 11

#### ENGINE COOLING SYSTEM

Type	Ethylene Glycol 50 / 50 Mix
Water Pump	Belt-Driven
Fan Speed (rpm)	2,100
Fan Diameter (in / cm)	20 (50.8)
Fan Mode	Pusher

#### FUEL SYSTEM

Fuel Type	Natural Gas, Propane Vapor
Fuel Shut Off Solenoid	Standard
LP Fuel Pressure	7 - 14 in Water Column
NG Fuel Pressure	3.5 - 14 in Water Column

### 48 / 60 / 80 kW

#### GENERATOR OUTPUT VOLTAGE/kW - 60 Hz

		kW LPG	Amp LPG	kW Nat. Gas	Amp Nat. Gas	CB Size (Both)
RG048	120/240 V, 1Ø, 1.0 pf	48	200	48	200	200
	120/208 V, 3Ø, 0.8 pf	48	167	48	167	175
	120/240 V, 3Ø, 0.8 pf	48	144	48	144	150
	277/480 V, 3Ø, 0.8 pf	48	72	48	72	80
RG060	120/240 V, 1Ø, 1.0 pf	60	250	60	250	300
	120/208 V, 3Ø, 0.8 pf	60	208	60	208	200
	120/240 V, 3Ø, 0.8 pf	60	180	60	180	200
	277/480 V, 3Ø, 0.8 pf	60	90	60	90	100
RG080	120/240 V, 1Ø, 1.0 pf	Contact Factory	Contact Factory	80	333	400
	120/208 V, 3Ø, 0.8 pf	Contact Factory	Contact Factory	80	277	300
	120/240 V, 3Ø, 0.8 pf	Contact Factory	Contact Factory	80	240	300
	277/480 V, 3Ø, 0.8 pf	Contact Factory	Contact Factory	80	120	150

#### SURGE CAPACITY IN AMPS

		Voltage Dip @ < .4 pf	
		15%	30%
RG048	120 / 240 V, 1Ø	100	300
	120 / 208 V, 3Ø	118	242
	120 / 240 V, 3Ø	97	189
	277 / 480 V, 3Ø	63.6	122.8
RG060	120 / 240 V, 1Ø	Contact Factory	Contact Factory
	120 / 208 V, 3Ø	Contact Factory	Contact Factory
	120 / 240 V, 3Ø	Contact Factory	Contact Factory
	277 / 480 V, 3Ø	Contact Factory	Contact Factory
RG080	120 / 240 V, 1Ø	283	600
	120 / 208 V, 3Ø	236	500
	120 / 240 V, 3Ø	204	432
	277 / 480 V, 3Ø	Contact Factory	Contact Factory

#### ENGINE FUEL CONSUMPTION

		Natural Gas		Propane		
		(ft <sup>3</sup> / hr)	(m <sup>3</sup> / hr)	(gal / hr)	(ft <sup>3</sup> / hr)	(l / hr)
RG048	Exercise cycle	101	2.86	0.67	24.5	2.54
	25% of rated load	201	5.7	2.88	104.7	10.9
	50% of rated load	336	9.5	4.16	151.3	15.7
	75% of rated load	447	12.7	5.28	192	20
	100% of rated load	604	17.1	6.61	240.4	25
	RG060	Exercise cycle	103	2.9	0.9	33.2
25% of rated load		257	7.3	2.1	78	8.1
50% of rated load		432	12.2	4.4	161.2	16.8
75% of rated load		618	17.5	6.8	247.2	25.7
100% of rated load		808	22.9	8.4	305.6	31.8
RG080		Exercise cycle	103	2.9	0.9	33.2
	25% of rated load	292	8.3	2.6	93.6	9.7
	50% of rated load	534	15.1	5.7	208.8	21.7
	75% of rated load	799	22.6	8.3	303.2	31.5
	100% of rated load	1,063	30.1	10.8	393.2	40.9

Note: **Fuel pipe must be sized for full load.**

For Btu content, multiply ft<sup>3</sup> / hr x 2,520 (LP) or ft<sup>3</sup> / hr x 1,000 (NG).

For megajoule content, multiply m<sup>3</sup> / hr x 93.15 (LP) or m<sup>3</sup> / hr x 37.26 (NG).

Refer to "Emissions Data Sheets" for maximum fuel flow for EPA and SCAQMD permitting purposes.

STANDBY RATING: Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Ratings are in accordance with ISO-3046-1. Design and specifications are subject to change without notice.

**48 / 60 / 80 kW**

**ENGINE COOLING**

	<b>48 kW</b>	<b>60 / 80 kW</b>
Air Flow (inlet air including alternator and combustion air in cfm / cmm)	2,829 / 80.1	3,197 / 90.5
System Coolant Capacity (gal / liters)	2.9 / 11	4.5 / 17
Heat Rejection to Coolant (BTU per hr / MJ per hr)	201,060	204,570
Maximum Operation Air Temperature on Radiator (°F / °C)	150 / 66	150 / 66
Maximum Ambient Temperature (°F / °C)	140 / 60	140 / 60

**COMBUSTION REQUIREMENTS**

Flow at Rated Power (scfm / cmm)	92.7 / 2.6	170.4 / 4.8
----------------------------------	------------	-------------

**SOUND EMISSIONS**

Sound Output in dB(A) at 23 ft (7 m) With Generator*	68	68
--	----	----

\*In exercise mode

**EXHAUST**

Exhaust Flow at Rated Output (scfm / cmm)	104 / 2.9	181 / 5.1
Exhaust Temperature at Muffler Outlet (°F / °C)	945 / 507	1,213 / 656

**ENGINE PARAMETERS**

Rated Synchronous rpm	1,800	1,800
-----------------------	-------	-------

**POWER ADJUSTMENT FOR AMBIENT CONDITIONS**

Temperature Deration ..... 3% for every 10 °C above 25 °C or 1.65% for every 10 °F above 77 °F  
 Altitude Deration.....1% for every 100 m above 183 m or 3% for every 1,000 ft above 600 ft

**CONTROLLER FEATURES**

Two-Line Plain Text LCD Display.....Simple user interface for ease of operation.  
 Mode Switch: Auto ..... Automatic Start on Utility failure. 7 day exerciser.  
                   Off ..... Stops unit. Power is removed. Control and charger still operate.  
                   Manual .....Start with starter control, unit stays on. If utility fails, transfer to load takes place.  
 Programmable Start Delay Between 10-30 Seconds ..... 10 sec standard  
 Engine Start Sequence ..... Cyclic cranking: 16 sec on, 7 rest (90 sec maximum duration)  
 Engine Warm-up..... 5 sec  
 Engine Cool-Down..... 1 min  
 Starter Lock-Out ..... Starter cannot re-engage until 5 sec after engine has stopped.  
 Smart Battery Charger ..... Standard  
 Automatic Voltage Regulation With Over and Under Voltage Protection ..... Standard  
 Automatic Low Oil Pressure Shutdown ..... Standard  
 Overspeed Shutdown ..... Standard, 72 Hz  
 High Temperature Shutdown ..... Standard  
 Overcrank Protection..... Standard  
 Safety Fused..... Standard  
 Failure to Transfer Protection ..... Standard  
 Low Battery Protection ..... Standard  
 50 Event Run Log ..... Standard  
 Future Set Capable Exerciser..... Standard  
 Incorrect Wiring Protection ..... Standard  
 Internal Fault Protection ..... Standard  
 Common External Fault Capability..... Standard  
 Governor Failure Protection..... Standard

Model #	Product	Description
G0071690	Mobile Link® 4G LTE Cellular Accessory	Generac's Mobile Link allows you to check the status of your generator from anywhere that you have access to an Internet connection from a PC or with any smart device. You will even be notified when a change in the generator's status occurs via e-mail or text message. Note: Harness Adapter Kit required. Available in the U.S. only.
G006478-0	Kit, Adapter Mobile Link L/C (Required for QT and RG Series)	The Harness Adapter Kit is required to make liquid-cooled units compatible with Mobile Link®.
G007992-0	Cold Weather Kit	If the temperature regularly falls below 32 °F (0 °C), install a cold weather kit to maintain optimal battery temperature. Kit consists of battery warmer with thermostat built into the wrap.
G007990-0	Extreme Cold Weather Kit	Recommended where the temperature regularly falls below 32 °F (0 °C) for extended periods of time. For liquid cooled units only.
G005651-0	Base Plug Kit	Add base plugs to the base of the generator to keep out debris.
G005703-0 - Bisque	Paint Kit	If the generator enclosure is scratched or damaged, it is important to touch-up the paint to protect from future corrosion. The paint kit includes the necessary paint to properly maintain or touch-up a generator enclosure.
G007991-0	Scheduled Maintenance Kit	The Liquid-Cooled Scheduled Maintenance Kits offer all the hardware necessary to perform complete maintenance on Generac liquid-cooled generators.
G006664-0	Local Wireless Monitor	Completely wireless and battery powered, Generac's wireless remote monitor provides you with instant status information without ever leaving the house.
G006665-0	Wireless Remote Extension Harness	Recommended for use with the Wireless Remote on units up to 60 kW, required for use on units 70 kW or greater.
G007993-0	E-Stop	E-stop allows for immediate fuel shutoff and generator shutdown in the event of an emergency.
G007005-0	Wi-Fi LP Fuel Level Monitor	The Wi-Fi enabled LP fuel level monitor provides constant monitoring of the connected LP fuel tank. Monitoring the LP tank's fuel level is an important step in making sure your generator is ready to run during an unexpected power failure. Status alerts are available through a free application to notify when your LP tank is in need of a refill.
G007000-0 (50 amp) G007006-0(100 amp)	Smart Management Module	Smart Management Modules (SMM) are used to optimize the performance of a standby generator. They manage large electrical loads upon startup and shed them to aid in recovery when overloaded. In many cases, using SMM's can reduce the overall size and cost of the system.
A0000018981	Ultrasonic Cleaner Solution	An ultra-concentrated anti-corrosive cleaning solution engineered to reach the smallest cavities to clean the toughest contaminants. This water based formula is non-toxic, biodegradable, safe for both metal and plastic surfaces, and is superior in rinsability.
A0000019001	All Surface Protectant	All surface protectant for vinyl, rubber, plastics creates a barrier that seals & protects surfaces from water, UV rays while renewing the look of the surface.

# 48 kW




# installation layout

Drawing #A0000293718-C (1 of 2)

ENGINE/KW		WEIGHT DATA		SHIPPING WEIGHT	
4.5L/48KW	AL	WEIGHT KG [LBS]	WEIGHT SHIPPING SKID KG [LBS]	KG [LBS]	KG [LBS]
		808 [1781]	51 [112]	859 [1893]	

SERVICE ITEM	4.5L
OIL FILL CAP	LEFT SIDE
OIL DIP STICK	LEFT SIDE
OIL FILTER	LEFT SIDE
OIL DRAIN HOSE	RIGHT SIDE
RADIATOR DRAIN HOSE	RIGHT SIDE
COOLANT RECOVERY BOTTLE	RIGHT SIDE
RADIATOR FILL CAP	ROOF TOP
AIR CLEANER ELEMENT	LEFT SIDE
SPARK PLUGS	LEFT SIDE
MUFFLER	SEE NOTE 11
DRIVE BELT	EITHER SIDE
BATTERY	LEFT SIDE



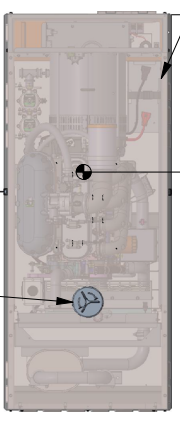


BATTERY 12V GROUP 27F NEGATIVE GROUND P/N G058865

REFERENCE OWNERS MANUAL FOR PERIODIC REPLACEMENT PARTS LIST

**NOTES:**

- MINIMUM RECOMMENDED CONCRETE PAD SIZE IS 6" OFFSET OF OVERALL LENGTH AND WIDTH OF GENERATOR. (1193.8 (47") WIDE X 2423.2 (95.4") LONG). REFERENCE INSTALLATION GUIDE SUPPLIED WITH THE UNIT FOR CONCRETE PAD GUIDELINES. REFERENCE MANUFACTURER'S SPECIFICATIONS IF USING ENGINEERED, PREFABRICATED SLABS.
- ALLOW SUFFICIENT ROOM ON ALL SIDES OF THE GENERATOR FOR MAINTENANCE AND SERVICING. THIS UNIT MUST BE INSTALLED IN ACCORDANCE WITH CURRENT APPLICABLE NFPA 37 AND NFPA 70 STANDARDS AS WELL AS ANY OTHER FEDERAL, STATE, AND LOCAL CODES.
- CONTROL PANEL / CIRCUIT BREAKER INFORMATION:  
- SEE SPECIFICATION SHEET OR OWNERS MANUAL  
- ACCESSIBLE THROUGH CUSTOMER ACCESS ASSEMBLY DOOR ON REAR OF GENERATOR.  
4. REMOVE THE REAR ENCLOSURE COVER PANEL TO ACCESS THE STUB-UP AREAS AS FOLLOWS:  
- HIGH VOLTAGE CONNECTION INCLUDING AC LOAD LEAD CONDUIT CONNECTION  
- NEUTRAL CONNECTION, BATTERY CHARGER 120 VOLT AC (0.5 AMP MAX) CONNECTION.  
- LOW VOLTAGE CONNECTION INCLUDING TRANSFER SWITCH CONTROL WIRES.
- CENTER OF GRAVITY AND WEIGHT MAY CHANGE DUE TO UNIT OPTIONS.
- BOTTOM OF GENERATOR SET MUST BE ENCLOSED TO PREVENT PEST INTRUSION AND RECIRCULATION OF DISCHARGE AIR AND/OR IMPROPER COOLING AIR FLOW.
- REFERENCE OWNERS MANUAL FOR LIFTING WARNINGS.
- MOUNTING BOLTS OR STUDS TO MOUNTING SURFACE SHALL BE 5/8-11 GRADE 5 (USE STANDARD SAE TORQUE SPECS)
- MUST ALLOW FREE FLOW OF INTAKE AIR, DISCHARGE AIR AND EXHAUST. SEE SPEC SHEET FOR MINIMUM AIR FLOW AND MAXIMUM RESTRICTION REQUIREMENTS.
- GENERATOR MUST BE INSTALLED SUCH THAT FRESH COOLING AIR IS AVAILABLE AND THAT DISCHARGE AIR FROM RADIATOR IS NOT RECIRCULATED.
- EXHAUST MUFFLER ENCLOSED WITHIN GENERATOR ENCLOSURE. REMOVE FRONT PANEL TO ACCESS.

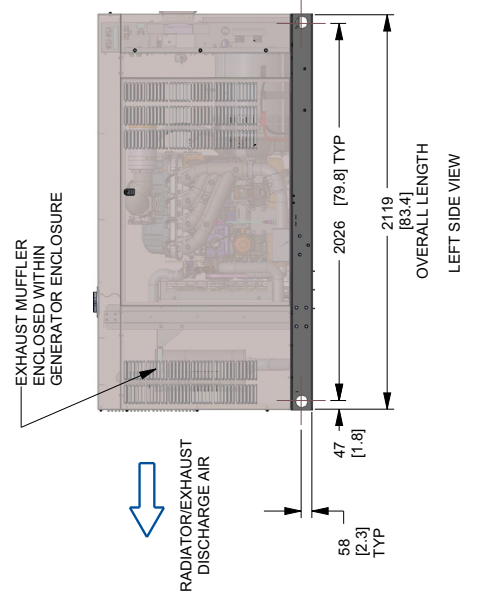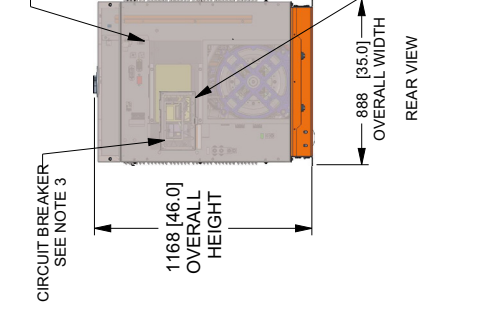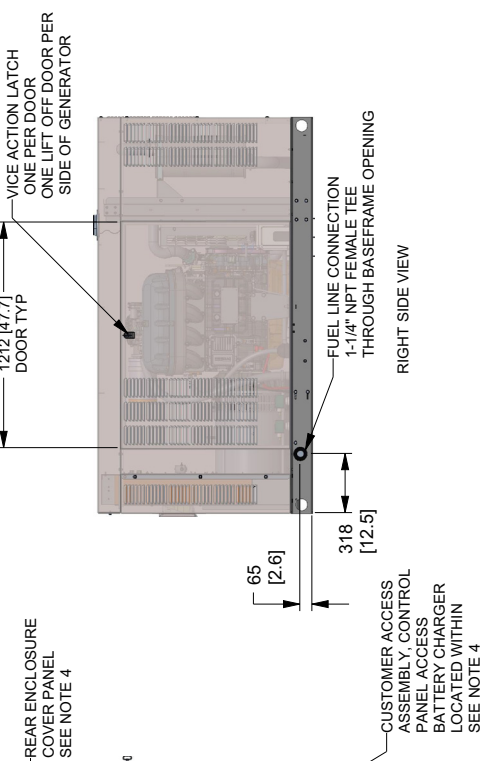


DIMENSIONS: MM [INCH]

# 48 kW

Drawing #A0000293718-C (2 of 2)

\*NOTE:  
STUB-UP AREA FOR HIGH AND LOW  
VOLTAGE CONNECTIONS, CIRCUIT BREAKER,  
NEUTRAL AND CUSTOMER CONNECTION OPENING.

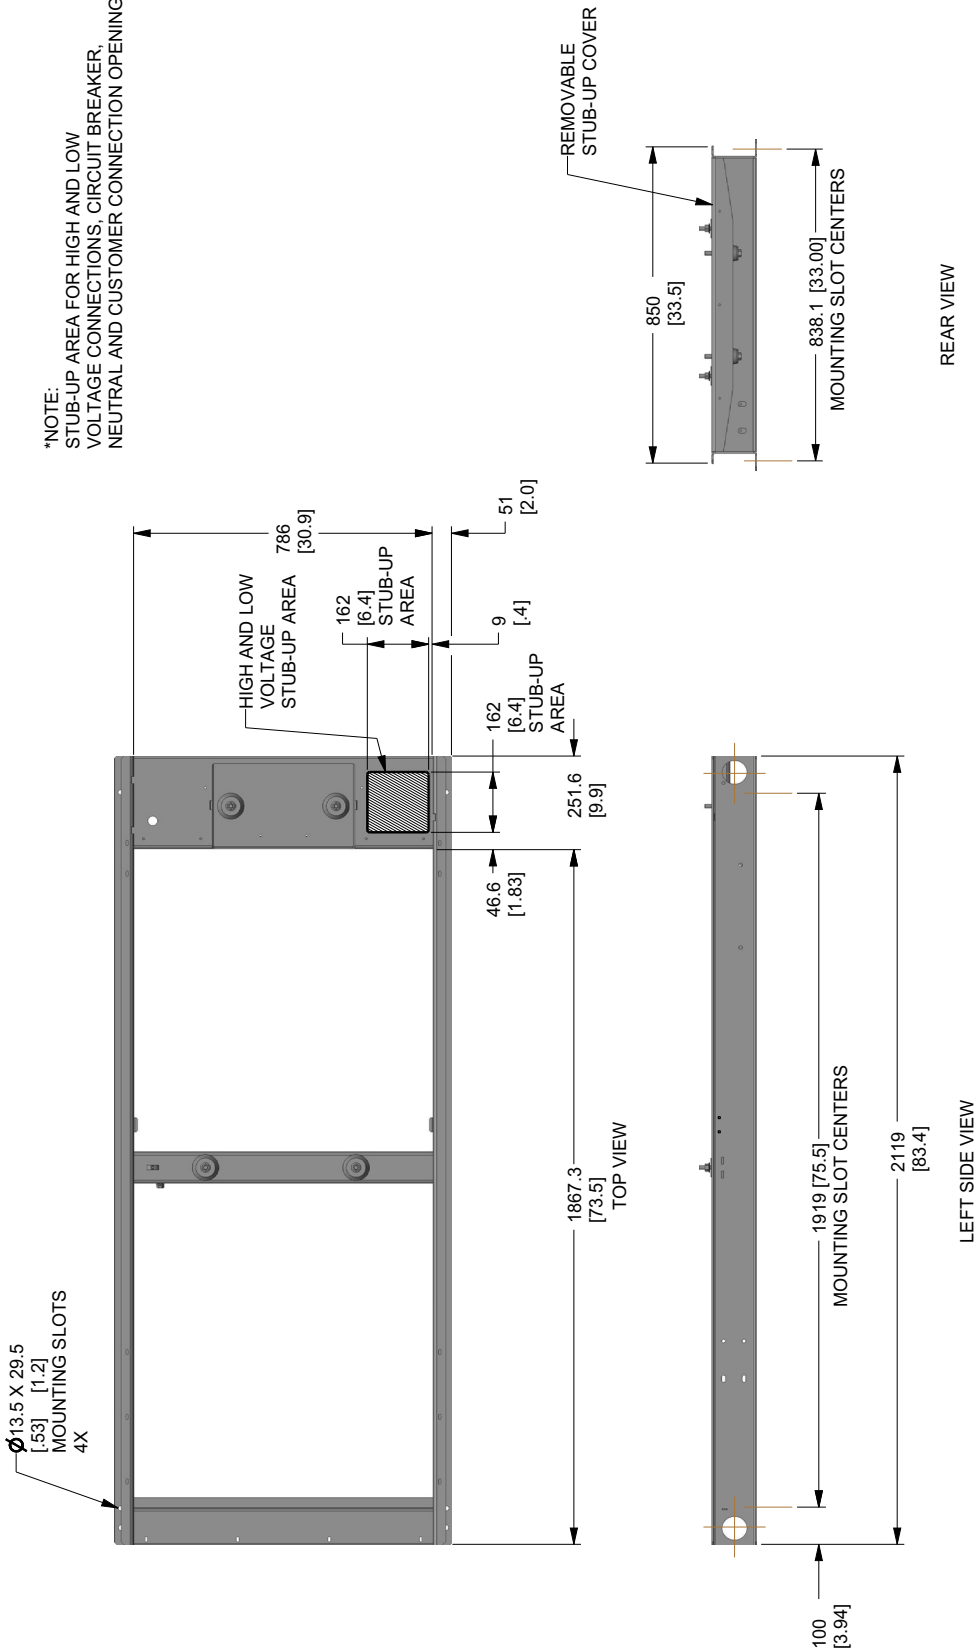

DIMENSIONS: MM [INCH]

# 60 / 80 kW



Drawing #A0000293264 (1 of 2)

## installation layout

- NOTES:**
- MINIMUM RECOMMENDED CONCRETE PAD SIZE: 16" LARGER PER SIDE THAN GENERATOR (1269 (50") WIDE 2786 (107") LONG).
  - REFERENCE INSTALLATION GUIDE SUPPLIED WITH UNIT FOR CONCRETE PAD GUIDELINES. ALLOW SUFFICIENT ROOM ON ALL SIDES OF THE GENERATOR FOR MAINTENANCE AND SERVICING. THIS UNIT MUST BE INSTALLED IN ACCORDANCE WITH CURRENT APPLICABLE NFPA 37 AND NFPA 70 STANDARDS AS WELL AS ANY OTHER FEDERAL, STATE, AND LOCAL CODES.
  - CONTROL PANEL / CIRCUIT BREAKER INFORMATION:
    - SEE SPECIFICATION SHEET OR OWNERS MANUAL
    - ACCESSIBLE THROUGH CUSTOMER ACCESS ASSEMBLY ON REAR OF GENERATOR.
  - INSIDE STUBUP AREA FOR AC LOAD LEAD CONDUIT CONNECTION, NEUTRAL CONNECTION BATTERY CHARGER 120 VOLT AC (5 AMP MAX) CONNECTION AND ACCESS TO TRANSFER SWITCH CONTROL WIRES. REMOVE REAR COVER FOR ACCESS.
  - CENTER OF GRAVITY AND WEIGHT MAY CHANGE DUE TO UNIT OPTIONS.
  - BOTTOM OF GENERATOR SET MUST BE ENCLOSED TO PREVENT PEST INTRUSION AND RECIRCULATION OF DISCHARGE AIR AND/OR IMPROPER COOLING AIR FLOW.
  - REFERENCE OWNERS MANUAL FOR LIFTING SURFACES.
  - MOUNTING BOLTS OR STUDS TO MOUNTING SURFACE SHALL BE 5/8"-1 GRADE 5 (USE STANDARD SAE TORQUE SPECS)
  - MUST ALLOW FREE FLOW OF INTAKE AIR, DISCHARGE AIR AND EXHAUST. SEE SPEC SHEET FOR MINIMUM AIR FLOW AND MAXIMUM RESTRICTION REQUIREMENTS.
  - GENERATOR MUST BE INSTALLED SUCH THAT FRESH COOLING AIR IS AVAILABLE AND THAT DISCHARGE AIR FROM RADIATOR IS NOT RECIRCULATED.
  - REMOVE FRONT END PANEL TO ACCESS EXHAUST MUFFLER. ACCESS AVAILABLE THROUGH DOORS TO FAN BELT.

SERVICE ITEM	4.5L
OIL FILL CAP	LEFT SIDE
OIL DIP STICK	LEFT SIDE
OIL FILTER	LEFT SIDE
OIL DRAIN HOSE	LEFT SIDE
RADIATOR DRAIN HOSE	RIGHT SIDE
COOLANT RECOVERY BOTTLE	RIGHT SIDE
RADIATOR FILL CAP	ROOF TOP
AIR CLEANER ELEMENT	EITHER SIDE
SPARK PLUGS	LEFT SIDE
MUFFLER	SEE NOTE 11
FAN BELT	EITHER SIDE
BATTERY	LEFT SIDE

REFERENCE OWNERS MANUAL FOR PERIODIC REPLACEMENT PART LISTINGS.

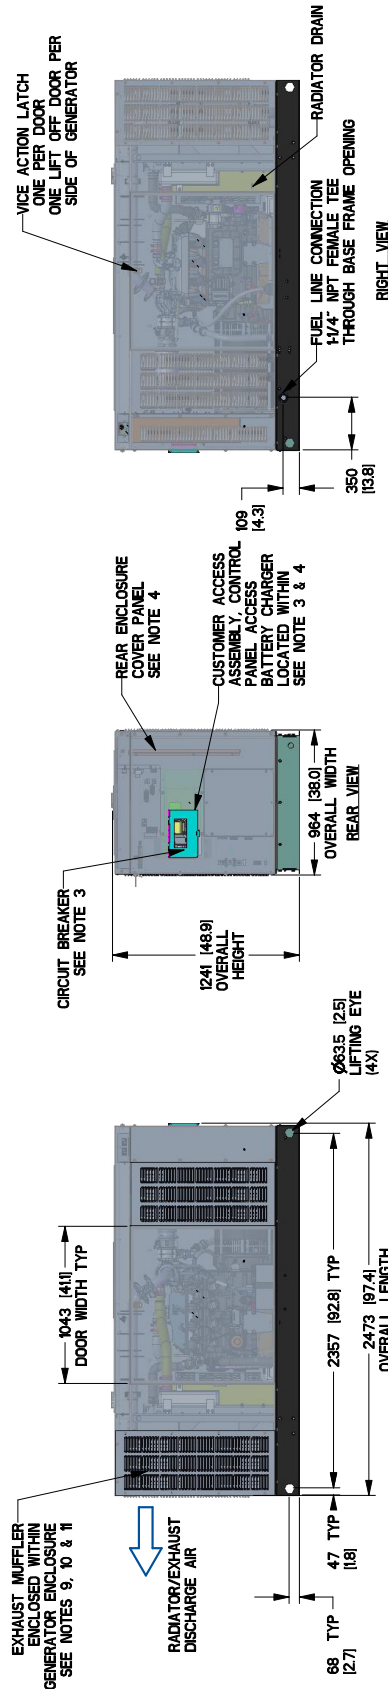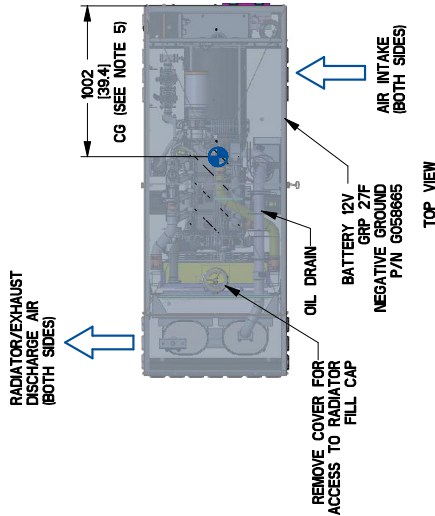

**WEIGHT DATA**

ENGINE/KW	ENCLOSURE MATERIAL	WEIGHT GENSET ONLY KG (LBS)	WEIGHT SHIPPING SKID KG (LBS)	SHIPPING WEIGHT KG (LBS)
4.5L/60KW	AL	867 (1922)	79 (175)	946 (2087)
4.5L/80KW	AL	972 (2022)	79 (175)	996 (2197)

DIMENSIONS: MM (INCH)



# 60 / 80 kW

Drawing #A0000293264 (2 of 2)

