



Ultra Series 4

EASY-UP MANIFOLD

Saves Time

Ready to install design reduces average single boiler installation time by two hours or more

Saves Money

Less than the cost of all components, plus assembly time including layout, measuring, cutting, soldering, etc.

Easy Installation

A few connections while ensuring proper flow through the boiler

Eliminates Piping Errors

Helps ensure correct piping strategy by incorporating the primary/secondary piping requirements

Provides a Professional Appearance

Neat joints, top quality components, color-coded valves, precise and true installation


Makes Indirect Water Heater Installation Easy

Includes boiler flow check and take-offs for domestic hot water connection for now, or in the future

Simple System Servicing

Manifold shut off valves provide quick isolation of the boiler and circulator from system piping



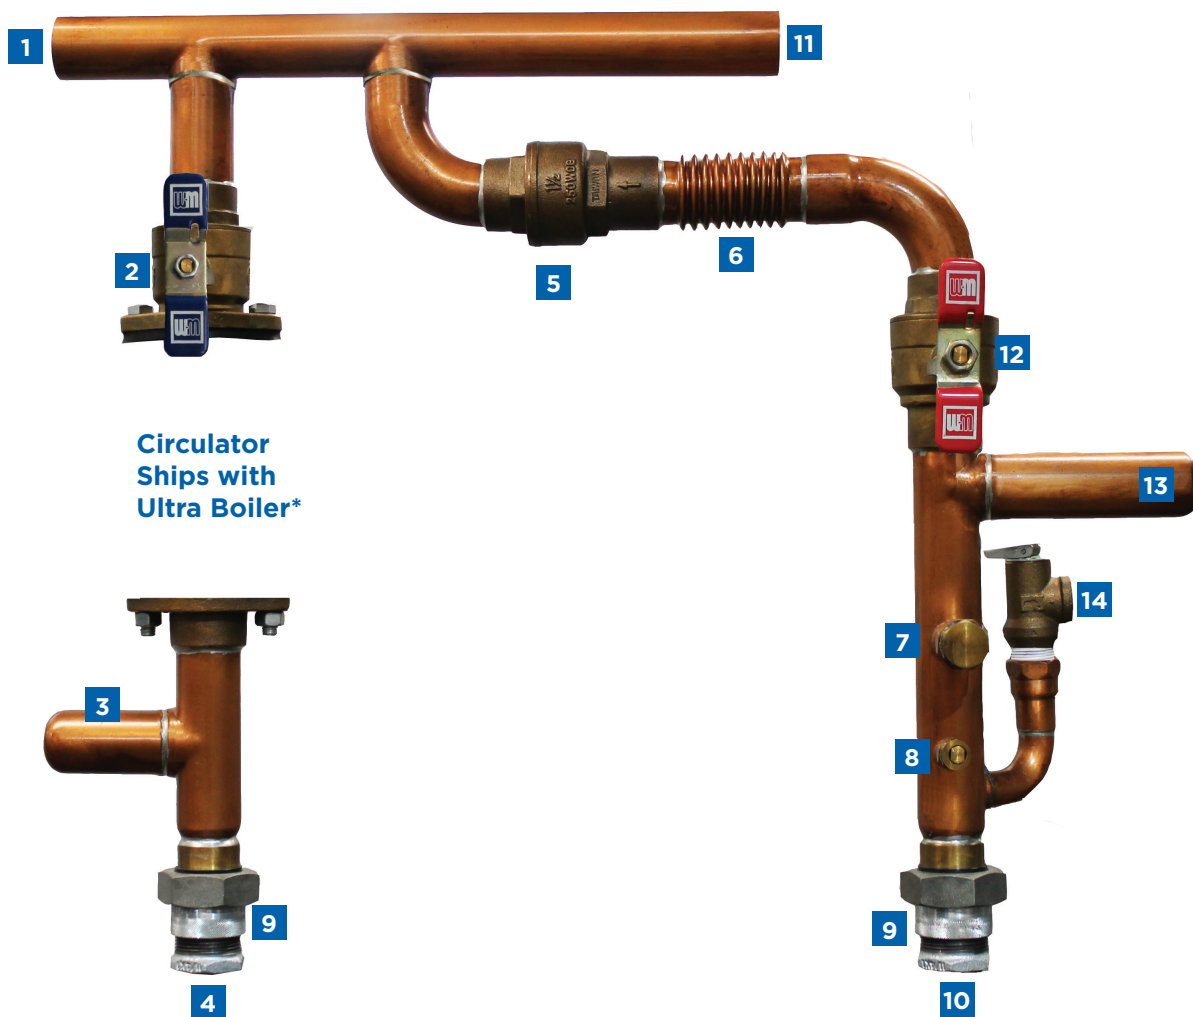

**Circulator
Ships with
Ultra Boiler***

1. System Return
2. Shut-off Valve
3. DHW Return (Use tubing cutter if required)
4. Boiler Return
5. Check Valve
6. Flex Pipe
7. LWCO Opening
8. Pressure/
Temperature Gauge
Opening
9. Dielectric Unions
10. Boiler Out
11. System Supply
12. Shut-off Valve
13. DHW Supply (Use
tubing cutter if
required)
14. Safety Relief Valve

***Circulator is not
included in the Ultra
Easy-Up Manifold Kit,
a circulator ships with
every Ultra Boiler**

Part Numbers for Ordering:

Ultra Boilers 80 & 105 #383-500-765

Ultra Boilers 155-399 #383-500-766

Ultra Gas kits that are available to make installation even easier:

3" PVC Concentric Vent kit #383-500-350

4" PVC Concentric Vent kit #383-900-075

Condensate Neutralizer kit #383-500-631

Low Water Cut Off kit #511-100-005