



TWO STAGE
15HP-25HP Industrial Compressors


All options below are included.

PISTON SERIES

- Quiet, low RPM Solid Cast Iron construction for extended life - up to 50,000 hours*



Flow-Tek™: Concentric Disc Valves for maximum Performance & Longevity

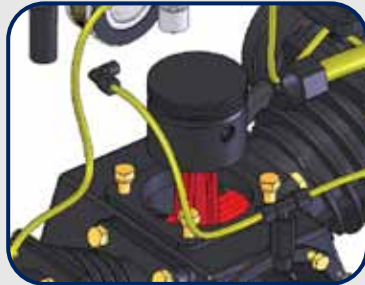

Ram-Tek: Solid Steel, heavy gauge rods for maximum Performance & Durability



Auto Tank Drain eliminates daily maintenance

Contact:



www.EmaxCompressor.com
1000 Cass Drive
Clayton, Ohio 45315
Toll Free: 866-294-4153
Fax: 937-540-1150
sales@emaxcompressor.com



Energy efficiency & MAXimum performance


Since 1977



Dual Control: Automatic and Continuous Run

Gate Valve Oil Drain: Provides quick, clean, oil changes

Magnetic Starter

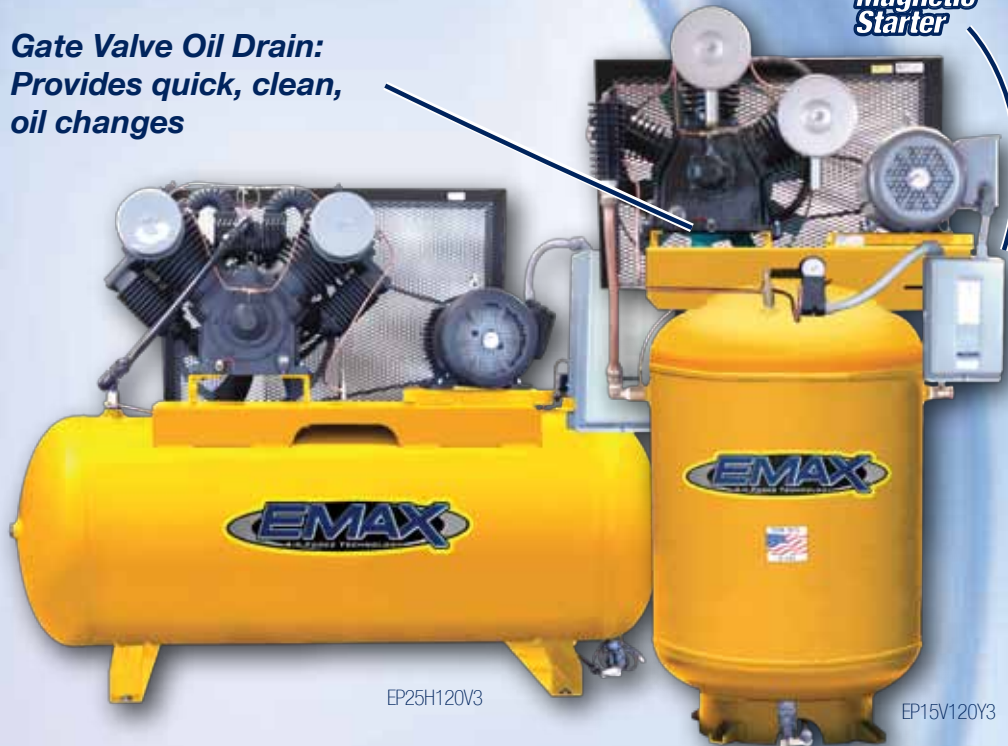

Features & Benefits

- **Cool-Tek:** The coolest running compressors in the industry - 35% lower operating temperature reduces moisture build up & extends pump life
- **Belt Tension Adjuster:** Fast, easy "one turn" way to tighten belts which reduces vibration and extends belt life

Model	EP15V120Y3	EP15H120Y3	EP20H120V3	EP25H120V3
Running HP	15	15	20	25
SCFM	52	52	68	89
Pump RPM	640	640	640	740
Power (Voltage)	208/230/460/575	208/230/460/575	208/230/460/575	208/230/460/575
Noise DB(A)	76	76	78	79
Tank size (Gallons)	120	120	120	120
Maximum PSI	175	175	175	175
Pump Model	APP3Y2062T	APP3Y2062T	APP4V2598T	APP4V2598T
Outlet	NPT 1"	NPT 1"	NPT 1"	NPT 2"
Weight (lbs.)	1410	1410	1500	1703
Dimensions: LxWxH	33"x24"x73"	79"x32"x62"	72"x30"x51"	72"x30"x51"

* Based on B-10 Bearing Rating

5YR - Limited warranty on oil-lubricated air compressor pumps and tanks.
2YR - Limited warranty on all air compressor components.



PIX1525H 8-09