


Thermostat base

Configuration Menu

1F79-111 Step	1F72-151 Step	1F79-111 Press Button(s)	1F72-151 Press Button(s)	Displayed (Factory Default)	Press or to select:	COMMENTS
1		Set SYSTEM switch to OFF				
2	1	and for at least 2 seconds	PRGM and RUN	FA (ON)	OFF	Select Fast (on) or slow (off) Second Stage Heat
3	2	and momentarily	HOLD *	CL (OFF)	ON	Select Compressor lockout OFF or ON
4	3	and momentarily	HOLD *	0 HI (0)	3 LO TO 3 HI	Select temperature display adjustment higher or lower
5*	4*	and momentarily	HOLD **	dL (ON)	OFF	Select display backlight OFF or ON
6	5	Move SYSTEM switch from OFF	RUN			Return to normal operation


* Not available on earlier models

** Press **HOLD** to advance to next item or **TIME** to move backwards to previous item

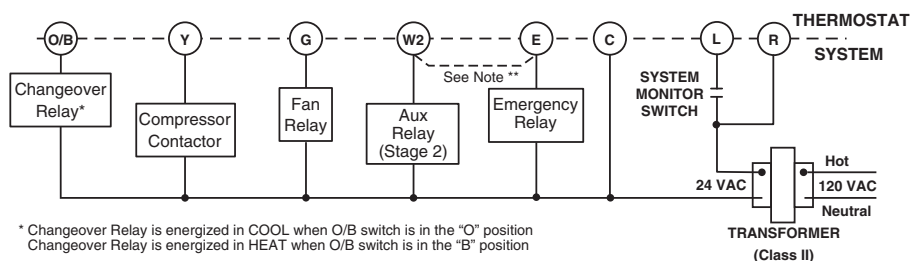

Typical wiring diagram for single transformer systems

NOTE
If safety circuits are in only one of the systems, remove the transformer of the system with **NO** safety circuits.

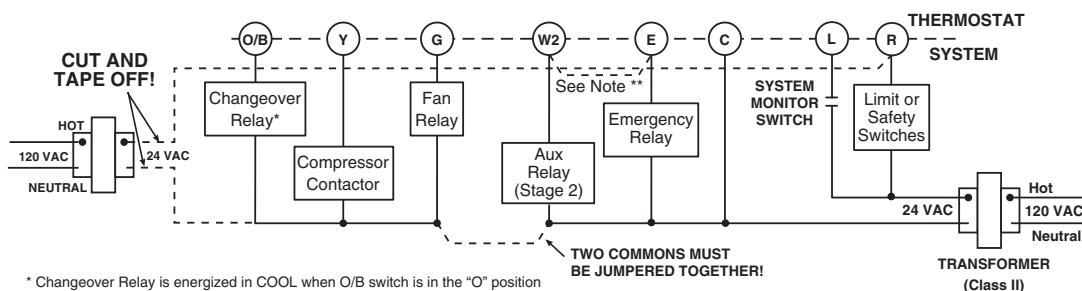

Typical wiring diagram for two transformer systems with NO safety circuits