



# OPERATOR'S MANUAL



## Citation Series

### 23HP Zero-Turn Riders

Mfg. No.	Description
----------	-------------

5900523	23HP Kawasaki Zero-Turn Rider
---------	-------------------------------

61" Mower

### 25HP Zero-Turn Riders

5900820	25HP Kawasaki Zero-Turn Rider
---------	-------------------------------

52" Mower

### 26HP Zero-Turn Riders

5900954	26HP Kawasaki Zero-Turn Rider
---------	-------------------------------

52" Mower

5900522	26HP Briggs & Stratton Cyclonic Zero-Turn Rider
---------	---

52" Mower

### 28HP Zero-Turn Riders

5900821	28HP Briggs & Stratton Vanguard Zero-Turn Rider
---------	---

61" Mower

5900524	28HP Briggs & Stratton Cyclonic Zero-Turn Rider
---------	---

61" Mower

**Thank you** for purchasing this quality-built SIMPLICITY product. We're pleased that you've placed your confidence in the SIMPLICITY brand. When operated and maintained according to the instructions in this manual, your SIMPLICITY product will provide many years of dependable service.

**This manual contains** safety information to make you aware of the hazards and risks associated with this machine and how to avoid them. This machine is designed and intended to be used and maintained according to the manual for finish cutting of established lawns and is not intended for any other purpose. It is important that you read and understand these instructions thoroughly before attempting to start or operate this equipment. **Save these original instructions for future reference.**

PRODUCT REFERENCE DATA	
Unit Model Number	Unit SERIAL Number
Mower Deck Model Number	Mower Deck SERIAL Number
Dealer Name	Date Purchased
ENGINE REFERENCE DATA	
Engine Make	Engine Model
Engine Type/Spec.	Engine Code/Serial Number

See **Features & Controls** for the location of Identification Numbers

### Technical Manuals

Additional copies of this manual are available, as well as fully illustrated parts lists. These manuals show all of the product's components in exploded views (3D illustrations which show the relationship of parts and how they go together) as well as part numbers and quantities used. Important assembly notes and torque values are also included.

For applicable manuals currently available for your model, contact our Customer Publications Department at 800-837-6836 (Simplicity). Have the information listed in the box below available when phoning in your request. Technical manuals can be downloaded from: [www.simplicitymfg.com](http://www.simplicitymfg.com)



Briggs & Stratton Power Products Group, LLC.  
Copyright © 2011 Briggs & Stratton Corporation  
Milwaukee, WI, USA. All rights reserved.

The Simplicity logo is a trademark of Briggs & Stratton Corporation Milwaukee, WI, USA.

#### Contact Information:

Briggs & Stratton Corp.  
Yard Power Products Group  
P.O. Box 702  
Milwaukee, WI 53201-0702  
[www.simplicitymfg.com](http://www.simplicitymfg.com)

#### WARNING

The engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

#### WARNING

Battery posts, terminals, and related accessories contain lead and lead compounds – chemicals known to the State of California to cause cancer and reproductive harm. Wash hands after handling.

# Table of Contents

<b>Operator Safety .....</b>	<b>2</b>
Safety Rules & Information .....	2
Safety Decals .....	11
Safety Icons & Interlock System .....	12
<b>Features &amp; Controls .....</b>	<b>13</b>
Identification Numbers .....	13
Control Functions .....	14
<b>Operation.....</b>	<b>16</b>
General Operating Safety .....	16
Checks Before Starting .....	16
Check Tire Pressures.....	17
Seat Adjustment .....	17
Pushing the Rider by Hand.....	18
Mowing Height Adjustment .....	18
Foot Pedal Adjustment.....	18
Starting the Engine .....	19
Stopping the Rider.....	19
Zero Turn Driving Practice.....	20
Raise & Lower the Roll Bar .....	22
Storage .....	22
Mowing.....	23
Mowing Recommendations .....	23
Mowing Methods.....	24
Attaching a Trailer .....	25
<b>Regular Maintenance .....</b>	<b>26</b>
Maintenance Schedule.....	26
Checking/Adding Fuel.....	27
Fuel Filter .....	27
Change Oil & Filter .....	27
Inspect Muffler and Spark Arrester.....	27
Check Hydraulic Oil Level .....	28
Change Hydraulic Oil Filter .....	28
Lubrication.....	29
Servicing the Mower Blades .....	30
Battery Maintenance .....	32
Ground Speed Control Lever Adjustment .....	33
Speed Balancing Adjustment .....	33
Neutral Adjustment.....	34
Return-to-Neutral Adjustment .....	35
Parking Brake Adjustment .....	36
Hydraulic Pump Drive Belt Replacement .....	36
Rear Suspension Adjustment .....	37
Mower Deck Adjustment - Kawi Models.....	38
Mower Deck Adjustment - B&S Models .....	39
Mower Belt Replacement.....	41
<b>Troubleshooting.....</b>	<b>43</b>
Troubleshooting the Rider .....	43
Troubleshooting the Mower.....	44
Troubleshooting Common Cutting Problems .....	45
<b>Specifications .....</b>	<b>46</b>

*NOTE: In this manual, “left” and “right” are referred to as seen from the operating position.*

## Operator Safety



### Operating Safety

Congratulations on purchasing a superior-quality piece of lawn and garden equipment. Our products are designed and manufactured to meet or exceed all industry standards for safety.

Do not operate this machine unless you have been trained. Reading and understanding this operator's manual is a way to train yourself.

Power equipment is only as safe as the operator. If it is misused, or not properly maintained, it can be dangerous! Remember, you are responsible for your safety and that of those around you.



Use common sense, and think through what you are doing. If you are not sure that the task you are about to perform can be safely done with the equipment you have chosen, ask a professional: contact your local authorized dealer.

### Read the Manual

The operator's manual contains important safety information you need to be aware of **BEFORE** you operate your unit as well as **DURING** operation.

Safe operating techniques, an explanation of the product's features and controls, and maintenance information is included to help you get the most out of your equipment investment.

Be sure to completely read the Safety Rules and Information found on the following pages. Also completely read the Operation section.

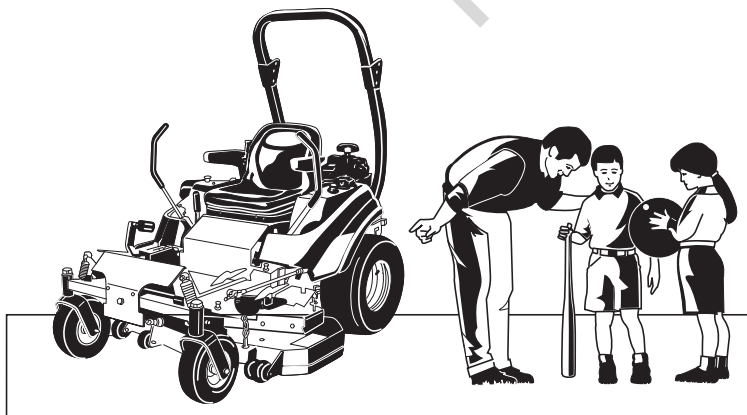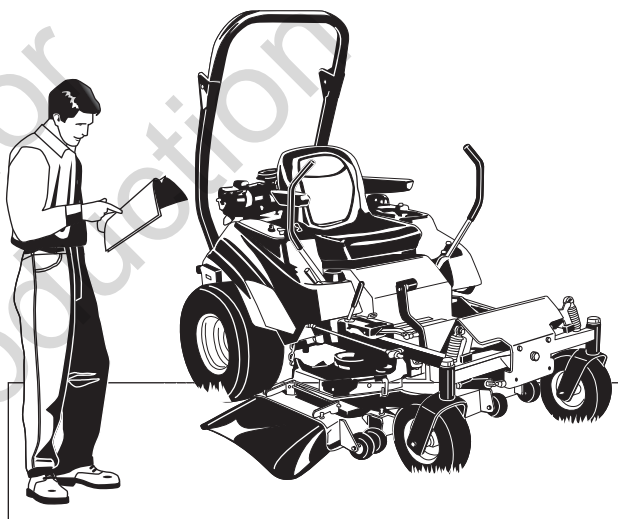

### Children

Tragic accidents can occur with children. Do not allow them anywhere near the area of operation. Children are often attracted to the unit and mowing activity. Never assume that children will remain where you last saw them. If there is a risk that children may enter the area where you are mowing, have another responsible adult watch them.



## Slope Operation

Operation on slopes can be dangerous. Using the unit on a slope that is too steep where you do not have adequate wheel traction (and control) can cause sliding, loss of steering, control, and possible rollover. You should not operate on a slope greater than a 5.4 foot rise over a 20 foot length (15 degrees).

Always mow across slopes, not up and down (to maintain traction on the wheels) and avoid sudden turns or rapid speed changes. Reduce speed and use extreme caution on ALL slopes.

Also, note that the surface condition you are on can greatly impact your ability to safely operate this machine. Operating on wet or slippery slopes can cause sliding and loss of steering and control. Do not operate on slopes that are slippery, wet, or have soft soil conditions.


If you feel unsure about operating the unit on a slope, don't do it. It's not worth the risk.

## Thrown Objects

This unit has spinning mower blades. These blades can pick up and throw debris that could seriously injure a bystander. Be sure to clean up the area to be mowed and remove objects that could be thrown by the blade BEFORE you start mowing.

Do not operate this unit without the entire grass catcher or discharge guard (deflector) in place.

Also, do not allow anyone in the area while the unit is running! If someone does enter the area, shut the unit off immediately until they leave.

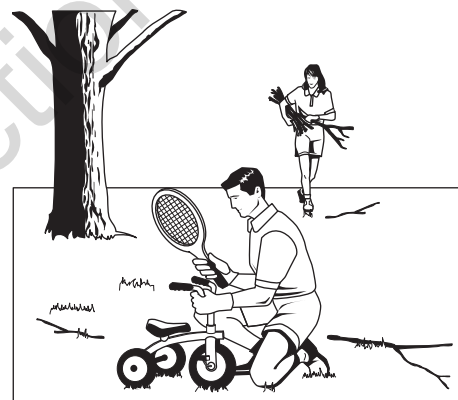


## Moving Parts

This equipment has many moving parts that can injure you or someone else. However, if you stay in the operator zone (stay seated in the seat), and follow the safety rules in this operator's manual, the unit is safe to operate.

The mower deck has spinning mower blades that can amputate hands and feet. Do not allow anyone near the unit while it is running! Keep safety devices (guards, shields, and switches) in place and working.

To help you, the operator, use this equipment safely, it is equipped with an operator-present safety system. Do NOT attempt to alter or bypass the system. See your dealer immediately if the system does not pass all the safety interlock system tests found in this manual.

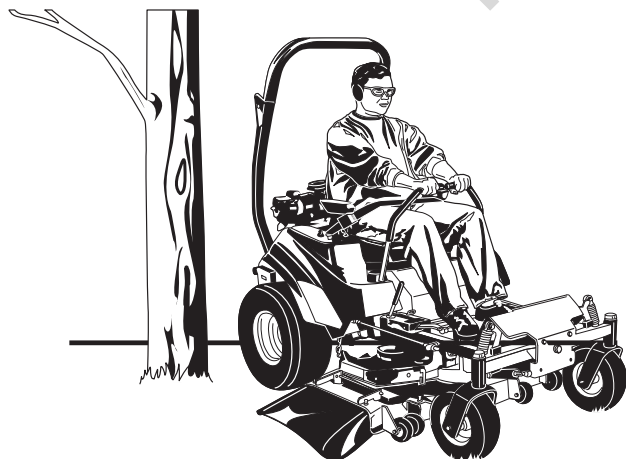






### Roll Bar Use

Keep the roll bar in the raised position and fasten the seat belt. There is no roll over protection when the roll bar is down! Do not jump off if the mower tips (it is safer to be secured by the seat belt with the roll bar raised.)

Lower the roll bar only when necessary (such as to temporarily clear a low overhanging obstacle) and NEVER remove it. Do NOT use the seat belt when the roll bar is down. Raise the roll bar as soon as clearance permits.

### Retaining Walls, Drop-offs, and Water



Retaining walls and drop-offs around steps and water are a common hazard. Give yourself a minimum of two mower widths of clearance around these hazards and hand-trim with a walk behind mower or string trimmer. Wheels dropping over retaining walls, edges, ditches, embankments, or into water can cause rollovers, which may result in serious injury, death, or drowning.

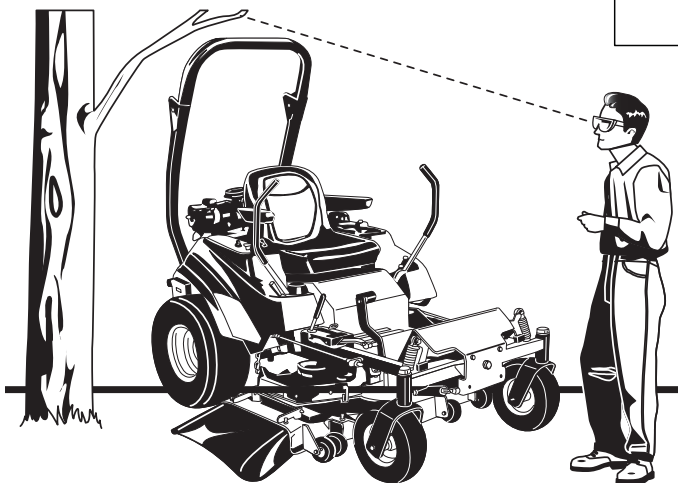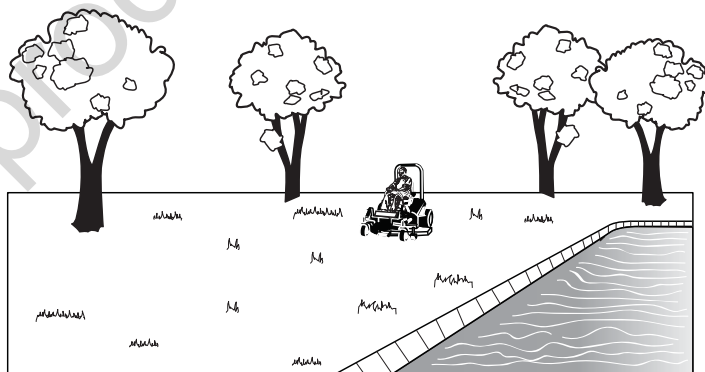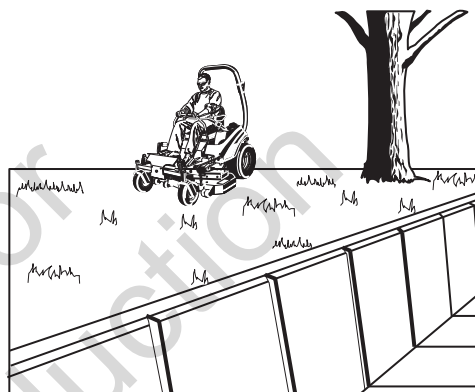

### Overhead Obstacles

Check for overhead clearances before driving under any objects. Do not allow the roll bar to contact low overhanging obstacles such as tree branches and guide wires.



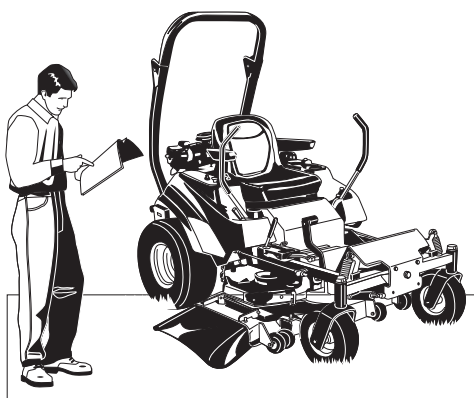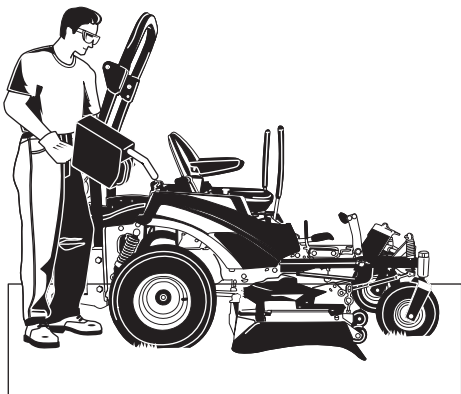

### Fuel and Maintenance

Always disengage all drives, shutoff the engine, and remove the key before doing any cleaning, refueling, or servicing.

Gasoline and its vapors are extremely flammable. Do not smoke while operating or refueling. Do not add fuel while engine is hot or running. Allow engine to cool for at least 3 minutes prior to adding fuel.


Do not add fuel indoors, in an enclosed trailer, garage, or any other enclosed area that is not well ventilated. Gasoline spills should be cleaned up promptly and before operation begins.

Gasoline should be stored only in sealed containers approved for fuel.


Proper maintenance is critical to the safety and performance of your unit. Keep the unit free of grass, leaves, and excess oil. Be sure to perform the maintenance procedures listed in this manual, especially periodically testing the safety system.

### Enclosed Areas

Only operate this unit outdoors and away from unventilated areas such as inside garages or enclosed trailers. The engine emits poisonous carbon monoxide gas and prolonged exposure in an enclosed area can result in serious injury or death.

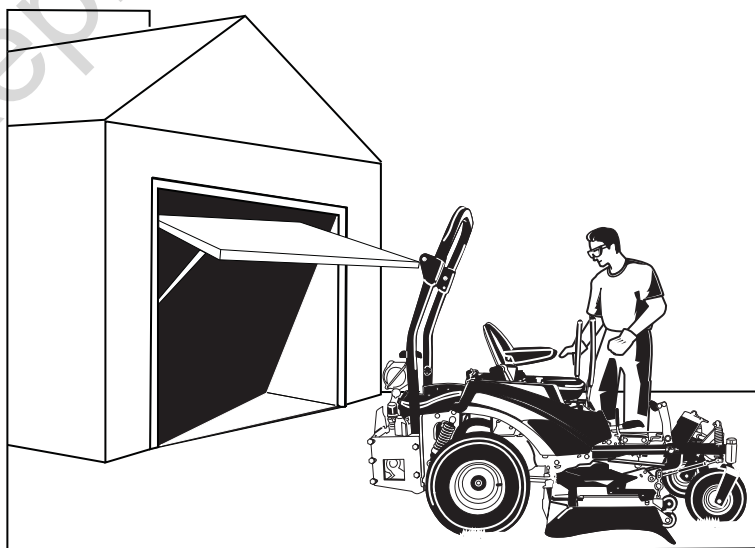



Read these safety rules and follow them closely. Failure to obey these rules could result in loss of control of unit, severe personal injury or death to you, or bystanders, or damage to property or equipment. **This mowing deck is capable of amputating hands and feet and throwing objects.** The triangle  in text signifies important cautions or warnings which must be followed.

## General Operation

1. Read, understand, and follow all instructions in the manual and on the unit before starting.
2. Do not put hands or feet near rotating parts or under the machine. Keep clear of the discharge opening at all times.
3. Only allow responsible adults, who are familiar with the instructions, to operate the unit (local regulations can restrict operator age).
4. Clear the area of objects such as rocks, toys, wire, etc., which could be picked up and thrown by the blade(s).
5. Be sure the area is clear of other people before mowing. Stop the unit if anyone enters the area.
6. Never carry passengers.
7. Do not mow in reverse unless absolutely necessary. Always look down and behind before and while travelling in reverse.
8. Never direct discharge material toward anyone. Avoid discharging material against a wall or obstruction. Material may ricochet back toward the operator. Stop the blade(s) when crossing gravel surfaces.
9. Do not operate the machine without the entire grass catcher, discharge guard (deflector), or other safety devices in place and operational.
10. Slow down before turning.
11. Never leave a running unit unattended. Always disengage the blades (PTO), set parking brake, stop engine, and remove keys before dismounting.
12. Disengage blades (PTO) when not mowing. Shut off engine and wait for all parts to come to a complete stop before cleaning the machine, removing the grass catcher, or unclogging the discharge guard.
13. Operate the machine only in daylight or good artificial light.
14. Do not operate the unit while under the influence of alcohol or drugs.
15. Watch for traffic when operating near or crossing roadways.
16. Use extra care when loading or unloading the unit into a trailer or truck.
17. Always wear eye protection when operating this unit.
18. Data indicates that operators, age 60 years and above, are involved in a large percentage of power equipment-related injuries. These operators should evaluate their ability to operate the equipment safely enough to protect themselves and others from injury.
19. Follow the manufacturer's recommendations for wheel weights or counterweights.
20. Keep in mind the operator is responsible for accidents occurring to other people or property.
21. All drivers should seek and obtain professional and practical instruction.
22. Always wear substantial footwear and trousers. Never operate when barefoot or wearing sandals.
23. Before using, always visually check that the blades and blade hardware are present, intact, and secure. Replace worn or damaged parts.
24. Disengage attachments before: refueling, removing an attachment, making adjustments (unless the adjustment can be made from the operator's position).
25. When the machine is parked, stored, or left unattended, lower the cutting means unless a positive mechanical lock is used.
26. Before leaving the operator's position for any reason, engage the parking brake (if equipped), disengage the blades (PTO), stop the engine, and remove the key.
27. To reduce fire hazard, keep the unit free of grass, leaves, & excess oil. Do not stop or park over dry leaves, grass, or combustible materials.
28. OSHA regulations may require the use of hearing protection when exposed to sound levels greater than 85 dBA for an 8 hour time period.

### WARNING

It is a violation of California Public Resource Code, Section 4442, to use or operate the engine on any forest-covered, brush-covered, or grass-covered land unless the exhaust system is equipped with a spark arrester, as defined in Section 4442, maintained in effective working order. Other states or federal jurisdictions may have similar laws. Contact an Authorized Service Dealer to obtain a spark arrester designed for the exhaust system installed on this engine.

### WARNING



**Extended exposure to excessively high sound levels can result in hearing loss.**

- This machine produces sound levels in excess of 85 dBA at the operator's ear and can cause hearing loss through extended periods of exposure.
- Wear hearing protection when operating this machine.

## Transporting and Storage

1. When transporting the unit on an open trailer, make sure it is facing forward, in the direction of travel. If the unit is facing backwards, wind lift could damage the unit.
2. Always observe safe refueling and fuel handling practices when refueling the unit after transportation or storage.
3. Never store the unit (with fuel) in an enclosed poorly ventilated structure. Fuel vapors can travel to an ignition source (such as a furnace, water heater, etc.) and cause an explosion. Fuel vapor is also toxic to humans and animals.
4. Always follow the engine manual instructions for storage preparations before storing the unit for both short and long term periods.
5. Always follow the engine manual instructions for proper start-up procedures when returning the unit to service.
6. Never store the unit or fuel container inside where there is an open flame or pilot light, such as in a water heater. Allow unit to cool before storing.



## Slope Operation

Slopes are a major factor related to loss-of-control and tip-over accidents, which can result in severe injury or death. Operation on all slopes requires extra caution. If you cannot back up the slope or if you feel uneasy on it, do not operate on it.

Control of a walk-behind or ride-on machine sliding on a slope will not be regained by the application of the brake. The main reasons for loss of control are: insufficient tire grip on the ground, speed too fast, inadequate braking, the type of machine is unsuitable for its task, lack of awareness of the ground conditions, incorrect hitching and load distribution.

1. Mow across slopes, not up and down.
2. Watch for holes, ruts, or bumps. Uneven terrain could overturn the unit. Tall grass can hide obstacles.
3. Choose a slow speed so that you will not have to stop or change speeds while on the slope.
4. Do not mow on wet grass. Tires may lose traction.
5. Avoid starting, stopping, or turning on a slope. If tires lose traction (i.e. machine stops forward motion on a slope), disengage the blade(s) (PTO) and drive slow off the slope.
6. Keep all movement on slopes slow and gradual. Do not make sudden changes in speed or direction, which could cause the machine to rollover.
7. Use extra care while operating machines with grass catchers or other attachments; they can affect the stability of the unit. Do not use on steep slopes.
8. Do not try to stabilize the machine by putting your foot on the ground (ride-on units).
9. Do not mow near drop-offs, ditches, or embankments. The mower could suddenly turn over if a wheel is over the edge of a cliff or ditch, or if an edge caves in.
10. Do not use grass catchers on steep slopes.
11. Do not mow slopes if you cannot back up them.
12. See your authorized dealer/retailer for recommendations of wheel weights or counterweights to improve stability.
13. Remove obstacles such as rocks, tree limbs, etc.
14. Use slow speed. Tires may lose traction on slopes even though the brakes are functioning properly.
15. Do not turn on slopes unless necessary, and then, turn slowly and gradually uphill, if possible. Never mow down slopes.

### WARNING



**Operating on steep slopes can be dangerous.**

- Never operate on slopes greater than 15°.
- Select slow ground speed before driving onto a slope. Use extra caution when operating on slopes with a rear-mounted grass catcher.
- Mow across the face of slopes, not up and down, use caution when changing directions and **DO NOT START OR STOP ON A SLOPE.**

## Towed Equipment (Ride-On Units)

1. Tow only with a machine that has a hitch designed for towing. Do not attach towed equipment except at the hitch point.
2. Follow the manufacturer's recommendations for weight limit for towed equipment and towing on slopes. See attaching a trailer under OPERATION.
3. Never allow children or others in or on towed equipment.
4. On slopes, the weight of the towed equipment may cause loss of traction and loss of control.
5. Travel slowly and allow extra distance to stop.
6. Do not shift to neutral and coast down hill.

## Children

Tragic accidents can occur if the operator is not alert to the presence of children. Children are often attracted to the unit and the mowing activity. Never assume that children will remain where you last saw them.

1. Keep children out of the mowing area and under the watchful care of another responsible adult.
2. Be alert and turn unit off if children enter the area.
3. Before and during reverse operation, look behind and down for small children.
4. Never carry children, even with the blade(s) off. They may fall off and be seriously injured or interfere with safe unit operation. Children who have been given rides in the past may suddenly appear in the mowing area for another ride and be run over or backed over by the machine.
5. Never allow children to operate the unit.
6. Use extra care when approaching blind corners, shrubs, trees, or other objects that may obscure vision.

## Emissions

1. Engine exhaust from this product contains chemicals known, in certain quantities, to cause cancer, birth defects, or other reproductive harm.
2. Look for the relevant Emissions Durability Period and Air Index information on the engine emissions label.

## Ignition System

1. This spark ignition system complies with Canadian ICES-002.

## Service and Maintenance

### Safe Handling of Gasoline

1. Extinguish all cigarettes, cigars, pipes, and other sources of ignition.
2. Use only approved gasoline containers.
3. Never remove the gas cap or add fuel with the engine running. Allow the engine to cool before refueling.
4. Never fuel the machine indoors.
5. Never store the machine or fuel container where there is an open flame, spark, or pilot light such as near a water heater or other appliance.
6. Never fill containers inside a vehicle or on a truck bed with a plastic bed liner. Always place containers on the ground away from your vehicle before filling.
7. Remove gas-powered equipment from the truck or trailer and refuel it on the ground. If this is not possible, then refuel such equipment on a trailer with a portable container, rather than from a gasoline dispenser nozzle.
8. Keep nozzle in contact with the rim of the fuel tank or container opening at all times until fueling is complete. Do not use a nozzle lock-open device.
9. If fuel is spilled on clothing, change clothing immediately.
10. Never over-fill the fuel tank. Replace gas cap and tighten securely.
11. Use extra care in handling gasoline and other fuels. They are flammable and vapors are explosive.
12. If fuel is spilled, do not attempt to start the engine but move the machine away from the area of spillage and avoid creating any source of ignition until fuel vapors have dissipated.
13. Replace all fuel tank caps and fuel container caps securely.

### Service & Maintenance

1. Never run the unit in an enclosed area where carbon monoxide fumes may collect.
2. Keep nuts and bolts, especially blade attachment bolts, tight and keep equipment in good condition.
3. Never tamper with safety devices. Check their proper operation regularly and make necessary repairs if they are not functioning properly.
4. Keep unit free of grass, leaves, or other debris build-up. Clean up oil or fuel spillage, and remove any fuel-soaked debris. Allow machine to cool before storage.
5. If you strike an object, stop and inspect the machine. Repair, if necessary, before restarting.
6. Never make adjustments or repairs with the engine running.
7. Check grass catcher components and the discharge guard frequently and replace with manufacturer's recommended parts, when necessary.
8. Mower blades are sharp. Wrap the blade or wear gloves, and use extra caution when servicing them.
9. Check brake operation frequently. Adjust and service as required.
10. Maintain or replace safety and instructions labels, as necessary.
11. Do not remove the fuel filter when the engine is hot as spilled gasoline may ignite. Do not spread fuel line clamps further than necessary. Ensure clamps grip hoses firmly over the filter after installation.

12. Do not use gasoline containing METHANOL, gasohol containing more than 10% ETHANOL, gasoline additives, or white gas because engine/fuel system damage could result.
13. If the fuel tank must be drained, it should be drained outdoors.
14. Replace faulty silencers/mufflers.
15. Maintain or replace safety and instruction labels as necessary.
16. Use only factory authorized replacement parts when making repairs.
17. Always comply with factory specifications on all settings and adjustments.
18. Only authorized service locations should be utilized for major service and repair requirements.
19. Never attempt to make major repairs on this unit unless you have been properly trained. Improper service procedures can result in hazardous operation, equipment damage and voiding of manufacturer's warranty.
20. On multiple blade mowers, take care as rotating one blade can cause other blades to rotate.
21. Do not change engine governor settings or over-speed the engine. Operating the engine at excessive speed can increase the hazard of personal injury.
22. Disengage drive attachments, stop the engine, remove the key, and disconnect the spark plug wire(s) before: clearing attachment blockages and chutes, performing service work, striking an object, or if the unit vibrates abnormally. After striking an object, inspect the machine for damage and make repairs before restarting and operating the equipment.
23. Never place hands near the moving parts, such as a hydro pump cooling fan, when the rider is running. (Hydro pump cooling fans are typically located on top of the transaxle).
24. Units with hydraulic pumps, hoses, or motors: **WARNING:** Hydraulic fluid escaping under pressure may have sufficient force to penetrate skin and cause serious injury. If foreign fluid is injected into the skin it must be surgically removed within a few hours by a doctor familiar with this form of injury or gangrene may result. Keep body and hands away from pin holes or nozzles that eject hydraulic fluid under high pressure. Use paper or cardboard, and not hands, to search for leaks. Make sure all hydraulic fluid connections are tight and all hydraulic hoses and lines are in good condition before applying pressure to the system. If leaks occur, have the unit serviced immediately by your authorized dealer.
25. **WARNING:** Stored energy device. Improper release of springs can result in serious personal injury. Springs should be removed by an authorized technician.
26. Models equipped with an engine radiator: **WARNING:** Stored energy device. To prevent serious bodily injury from hot coolant or steam blow-out, never attempt to remove the radiator cap while the engine is running. Stop the engine and wait until it is cool. Even then, use extreme care when removing the cap

## Roll Bar Instructions

For models equipped with factory-installed Roll Over Protection System (ROPS).

### **WARNING**

In order to avoid serious injury or death from roll over, it is important to follow the warnings listed below.

### Operational Warnings

- Always use the seat belt when the roll bar is in the raised position.
- Never use the seat belt when the roll bar is in the down position.
- Remember there is no roll over protection when the roll bar is in the down position so it is very important to always keep the roll bar in the raised position whenever possible.
- Lower the roll bar to the down position only when it is absolutely necessary.
- Check for overhead clearances before driving under any objects. Do not allow roll bar to contact low overhanging obstacles such as tree branches and guide wires.
- Never remove the roll bar from the vehicle.
- Do not exceed the machine weight rating of the roll bar.
- Read and follow all of the instructions shown below regarding the inspection and maintenance of the roll bar structure and the seat belt.

### Inspection of the Roll Bar Protective Structure

### **WARNING**

Failure to properly inspect and maintain the Roll Bar protective structure can cause serious injury or death.

A ROLL BAR, like any other safety device, needs to be periodically inspected to verify that the integrity of the device has not been compromised through normal machine use, misuse, age degradation, modifications, or a roll over.

To maintain operator roll over protection and roll bar effectiveness:

- If a ROLL BAR becomes damaged for any reason, such as a collision, roll over or impact, the ROLL BAR must be replaced. Small undetectable cracks can reduce the effectiveness of the ROLL BAR. Never weld, straighten, or repair the ROLL BAR.
- Never alter the ROLL BAR by welding anything to it or by drilling additional holes.

- **Before First Time Use** - Inspect the ROLL BAR structure and mounting hardware for:

- 1) Check to make sure the machine GVW (Gross Vehicle Weight), including attachments, restrained payload, fuel and operator, is not in excess of the maximum weight specified on the ROLL BAR label.
- 2) Make sure there isn't any missing, damaged, or loose mounting hardware.
- 3) Make sure the ROLL BAR has been correctly and completely installed.

- **Every 100 Hours** - Inspect the ROLL BAR structure and mounting hardware for:

- 1) Any cracks in the structure (structural members and/or welds).
- 2) Significant corrosion on any part of the ROLL BAR structure or hardware.
- 3) Missing, damaged, or loose mounting hardware.
- 4) Mounting hardware that is of a grade lesser than specified.
- 5) Machine GVW (Gross Vehicle Weight), including attachments, restrained payload, fuel and operator, in excess of the maximum weight specified on the ROLL BAR label.
- 6) Any modifications that have been made, such as unauthorized welds and holes.
- 7) Any permanent deformation or twisting of the ROLL BAR structure.
- 8) That the ROLL BAR label is still in place and is readable.
- 9) That the ROLL BAR on-product warning labels are still on the ROLL BAR and are readable.


- If there is any doubt as to the condition of the ROLL BAR, remove the machine from service and contact your dealer for assistance.

### Inspection and Maintenance of the Roll Bar Seat Belt

#### **⚠ WARNING**

Failure to properly inspect and maintain the seat belt can cause serious injury or death.

- The seat belt like the ROLL BAR, needs to be periodically inspected to verify that the integrity has not been compromised through normal machine use, misuse, age degradation, modifications, or a roll over. If the seat belt does not pass all of the following tests, it should be replaced.
- **Before Each Use** – Conduct the following inspections/maintenance of the seat belt and retraction mechanism:
  - 1) Check for dirt or debris in the retraction mechanism. If dirt or debris is found, it should be removed.
  - 2) Check to make sure the retraction mechanism retracts easily and completely.
  - 3) Check for damage to any part of the seat belt such as nicks, cuts, loose stitching, or fraying.
  - 4) Check that the buckle and latch operate properly and that the latch plate is not excessively worn, deformed, or the buckle is damaged or cracked. The seat belt should latch and release easily.

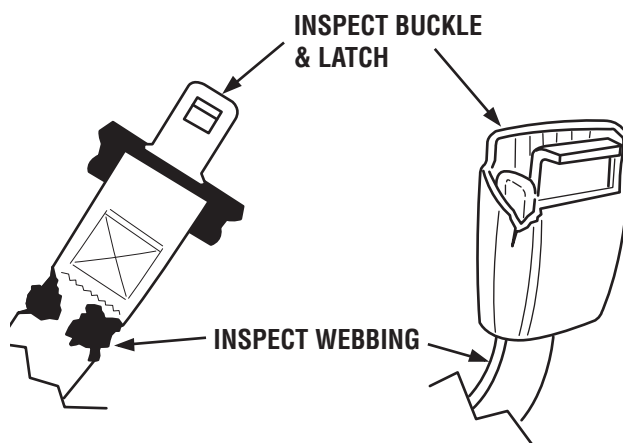

## Safety Decals










This unit has been designed and manufactured to provide you with the safety and reliability you would expect from an industry leader in outdoor power equipment manufacturing.

Although reading this manual and the safety instructions it contains will provide you with the necessary basic knowledge to operate this equipment safely and effectively, we have placed several safety labels on the unit to remind you of this important information while you are operating your unit.

All DANGER, WARNING, CAUTION and instructional messages on your rider and mower should be carefully read and obeyed. Personal bodily injury can result when these instructions are not followed. The information is for your safety and it is important! The safety decals below are on your rider and mower.

If any of these decals are lost or damaged, replace them at once. See your local dealer for replacements.

These labels are easily applied and will act as a constant visual reminder to you, and others who may use the equipment, to follow the safety instructions necessary for safe, effective operation.

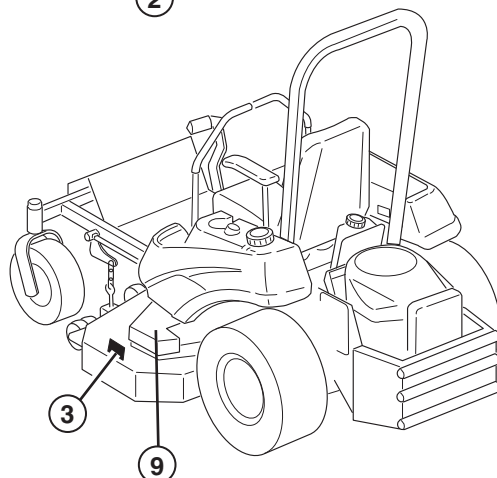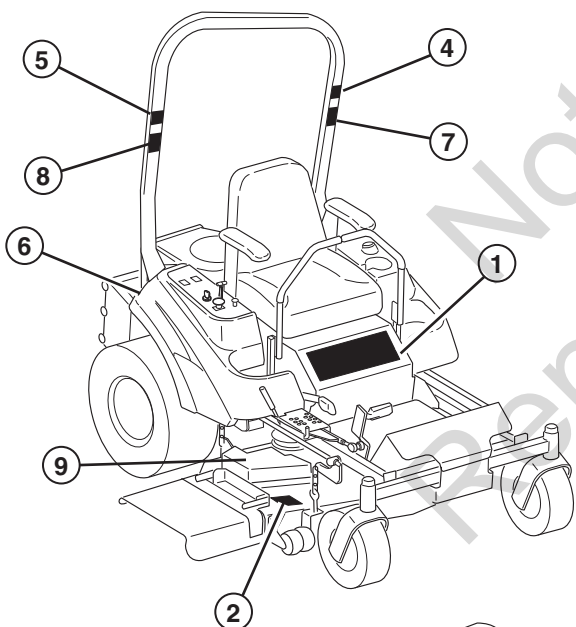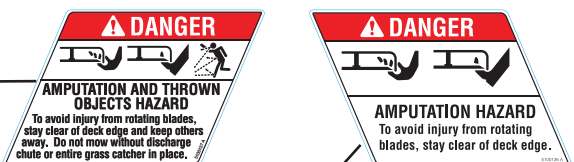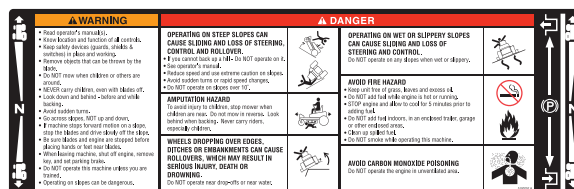

61" Models Only





## Safety Interlock System

This unit is equipped with safety interlock switches. These safety systems are present for your safety, do not attempt to bypass safety switches, and never tamper with safety devices. Check their operation regularly.

### Operational SAFETY Checks

#### Test 1 — Engine should NOT crank if:

- PTO switch is engaged, OR
- Parking brake is not engaged, OR
- Motion control handles are not in the NEUTRAL position.

#### Test 2 — Engine SHOULD crank if:

- PTO switch is NOT engaged, AND
- Parking brake is engaged, AND
- Motion control handles are locked in the NEUTRAL position.

#### Test 3 — Engine should SHUT OFF if:

- Operator rises off seat with PTO engaged, OR
- Operator rises off seat with parking brake disengaged.
- Operator moves motion control handles out of their neutral positions before disengaging parking brake.

#### Test 4 — Blade Brake Check


Mower blades and mower drive belt should come to a complete stop within five (5) seconds after electric PTO switch is turned off (or operator rises off seat). If mower drive belt does not stop within five (5) seconds, see your dealer.

*NOTE: Once the engine has stopped, PTO switch must be turned off, parking brake must be engaged, and the motion control handles must be locked in the NEUTRAL position after the operator returns to the seat in order to start the engine.*

## WARNING

If the unit does not pass a safety test, do NOT operate it. See your authorized dealer. Under no circumstance should you attempt to defeat the purpose of the safety interlock system.

## Safety Icons

The alert symbol () is used to identity safety information about hazards that can result in personal injury. A signal word (DANGER, WARNING, or CAUTION) is used with the alert symbol to indicate the likelihood and the potential severity of the injury. In addition, a hazard icon may be used to represent the type of hazard. An explanation of hazard levels and icons are as follows:

### DANGER

This indicates a hazard which, if not avoided, **will result in serious injury or death.**

### WARNING

This indicates a hazard which, if not avoided, **could result in serious injury or death.**

### CAUTION

This indicates a hazard which, if not avoided, **might result in serious injury or death.**

### NOTICE

This message presented without the alert symbol indicates a situation where the unit or property could be damaged.

## North American Safety Icons



Alert



Toxic Fumes



Read the Manual



Open Flame Hazard



Fire Hazard



Amputation - Rotating Parts



Amputation - Hand In Blade



Amputation - Foot In Blade



Thrown Objects



Hot Surface



Wear Protective Gear



Pinch Point



Rollover Hazard



Overhead Obstacles



Tipover



Dropoffs



Slippery Slopes



Keep Children Away



Kickback



Remove Key Before Servicing




## Features and Controls


### Identification Numbers



**North American Models**



**CE Models**

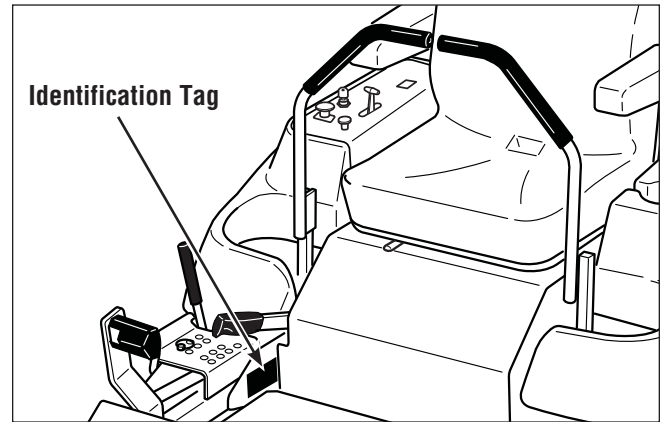


**When contacting your authorized dealer for replacement parts, service, or information you MUST have these numbers.**

Record your model name/number, manufacturer's identification numbers, and engine serial numbers in the space provided for easy access. These numbers can be found in the locations shown.

*NOTE: For location of engine identification numbers, refer to the engine owner's manual.*


### CE Identification Tag Markings

- A. Manufacturer's Identification Number
- B. Product Description
- C. Serial Number
- D. Manufacturer's Address
- E. CE Compliance Logo
- F. Year of Manufacture
- G. Maximum Engine Speed in Rotations per Minute
- H. Power Rating in Kilowatts
- I. Mass of Unit in Kilograms
- J. Sound Power in Decibels \*

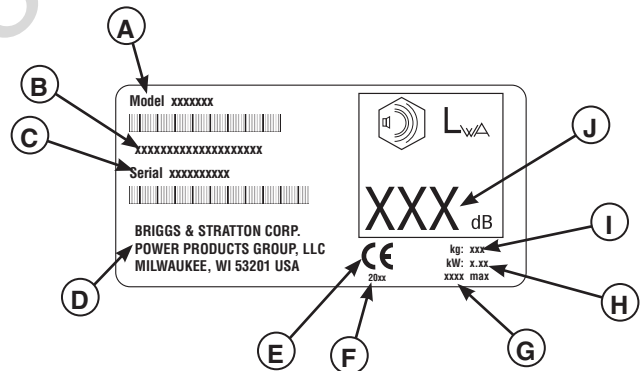

This unit complies with European Harmonized Lawn Mower Standard EN 836, European Machinery Directive 98/37/EC, and European EMC Directive 2004/108/EEC

\* Tested according to 2000/14/EC

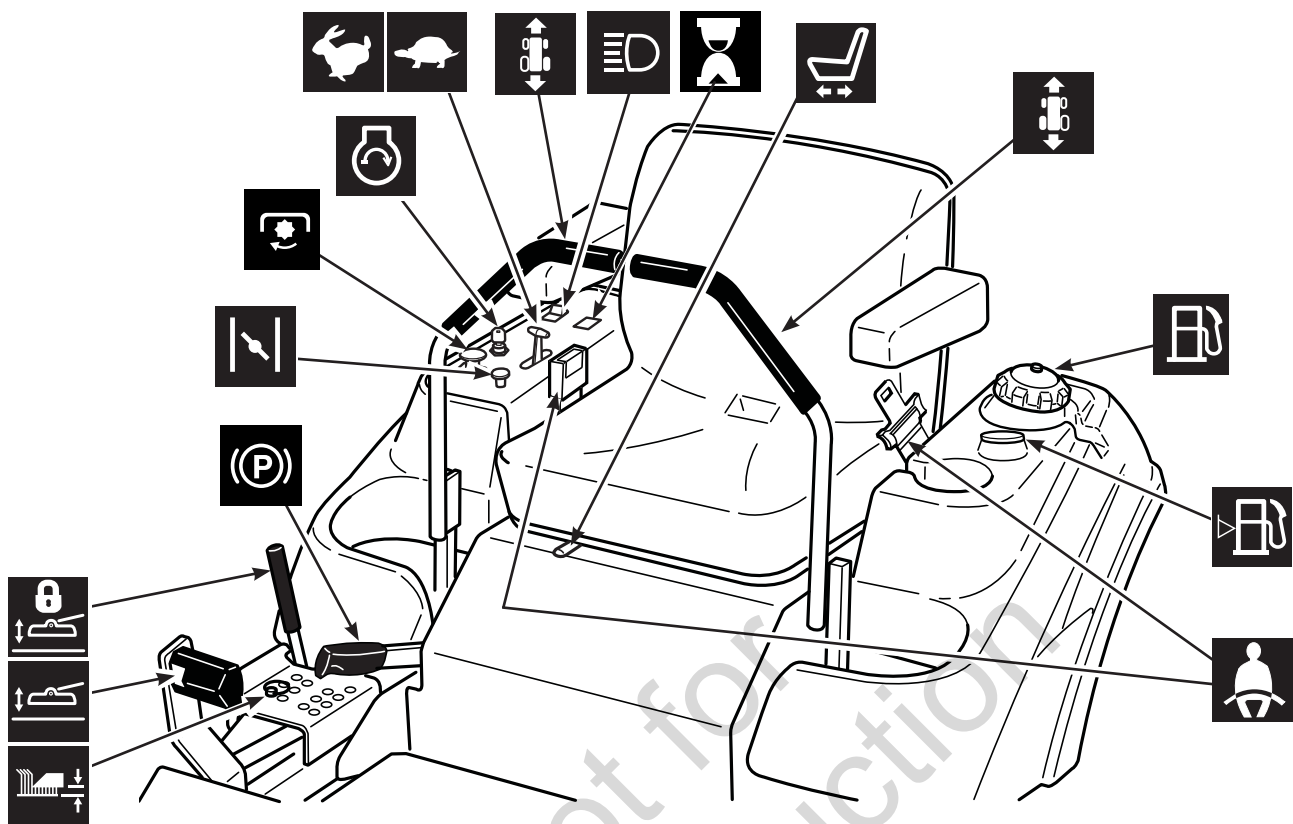

### Control Functions

The information below briefly describes the function of individual controls. Starting, stopping, driving, and mowing require the combined use of several controls applied in specific sequences. To learn what combination and sequence of controls to use for various tasks see the OPERATION section.



#### Deck Lift Pedal, Cutting Height Adjustment Pin & Deck Lift Lock Lever

These control the cutting height of the mower deck. Depress the deck lift pedal until it locks into the 5" (12,7 cm) position. Place the cutting height adjustment pin in the desired cutting height and release the deck lift lock lever.



#### Parking Brake



**DISENGAGE** Releases the parking brake.



**ENGAGE** Locks the parking brake.

Pull the parking brake lever back to engage the parking brake. Move the lever fully forward to disengage the parking brake. **NOTE:** To start the unit the parking brake must be engaged.



#### Choke

Close the choke for cold starting. Open the choke once the engine starts. A warm engine may not require choking. Pull the knob UP to close the choke. Push to knob DOWN to open the choke.



#### PTO (Power Take Off) Switch

The PTO switch engages and disengages the mower. Pull UP on the switch to engage, and push DOWN to disengage.



## Ignition Switch

The ignition switch starts and stops the engine, it has three positions:



**OFF** Stops the engine and shuts off the electrical system.



**RUN** Allows the engine to run and powers the electrical system.



**START** Cranks the engine for starting

*NOTE: Never leave the ignition switch in the RUN position with the engine stopped-this drains the battery.*



## Throttle Control

The throttle controls engine speed. Move the throttle forward to increase engine speed and back to decrease engine speed. Always operate at FULL throttle



## Ground Speed Control Levers

These levers control the ground speed of the rider. The left lever controls the left rear drive wheel and the right lever controls the right rear drive wheel.

Moving a lever forward increases the FORWARD speed of the associated wheel, and pulling back on a lever increases the REVERSE speed.

*Note: The further a lever is moved away from the neutral position the faster the drive wheel will turn.*

*See the Operating the Zero Turn Rider section for steering instructions.*



## Headlight

The headlight switch turns the headlights on and off.



## Hour Meter

The hour meter measures the number of hours the PTO has been engaged. The hour meter has a self contained power source so the total hours are always visible.



## Seat Adjustment Lever

The seat can be adjusted forward and back. Move the lever towards the left, position the seat as desired, and release the lever to lock the seat in position.



## Fuel Tank Cap

To remove the cap, turn counterclockwise.



## Fuel Level Gauge

Displays the fuel level in the tank.



## Retractable Seat Belt

The seat belt is used to secure the operator to the seat.


The seat belt should **always** be worn when the Roll Bar is in the raised position. The seat belt should **never** be worn when the Roll Bar is in the down position.


## Operation


### General Operating Safety

Before first time operation:

- Be sure to read all information in the Safety and Operation sections before attempting to operate this rider and mower.
- Become familiar with all of the controls and how to stop the unit.
- Drive in an open area without mowing to become accustomed to the unit.

<b>⚠ WARNING</b>	
	<p><b>Operating on steep slopes can be dangerous.</b></p>
<ul style="list-style-type: none"> <li>• Never operate on slopes greater than 15°.</li> <li>• Select slow ground speed before driving onto a slope. Use extra caution when operating on slopes with a rear-mounted grass catcher.</li> <li>• Mow across the face of slopes, not up and down, use caution when changing directions and <b>DO NOT START OR STOP ON A SLOPE.</b></li> </ul>	

<b>⚠ WARNING</b>	
	
<ul style="list-style-type: none"> <li>• Never allow passengers to ride on the unit.</li> <li>• Before leaving the operator's position for any reason, engage the parking brake, disengage the PTO, stop the engine and remove the key.</li> <li>• To reduce fire hazard, keep the engine, rider and mower free of grass, leaves and excess grease. Do NOT stop or park rider over dry leaves, grass or combustible materials.</li> <li>• Gasoline is highly flammable and must be handled with care. Never fill the tank when the engine is still hot from recent operation. Do NOT allow open flame, smoking or matches in the area. Avoid over-filling and wipe up any spills.</li> </ul>	
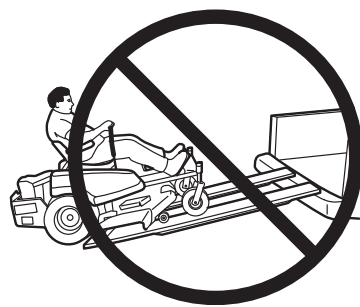
<b>⚠ WARNING</b>
<ul style="list-style-type: none"> <li>• Do NOT load this zero-turn rider on a trailer or truck using two separate ramps. Only use a single ramp that is at least one foot wider than the width of the rear wheels of this rider. This rider has a zero turning radius and the rear wheels could fall off the ramps, or the rider could tip over injuring the operator or bystanders.</li> </ul>


### Checks Before Starting

#### Kawasaki Models:

##### Kawasaki Engine (A, Figure 1)

- Check that the crankcase is filled to the full mark on the crankcase oil fill and dipstick (D & E). If necessary, add oil through the engine oil fill. See the engine Operator's manual for instructions and oil recommendations.
- Make sure all nuts, bolts, screws and pins are in place and tight.
- Adjust the seat position, and make certain you can reach all the controls from operator's position.
- Fill the fuel tank with fresh fuel. Refer to engine manual for fuel recommendations.

#### Briggs & Stratton Vanguard Models:

##### Briggs & Stratton (B, Figure 1)

- Check that the crankcase is filled to the full mark on the dipstick (D). If necessary add oil through the crankcase oil fill (E). See the engine Operator's manual for instructions and oil recommendations.
- Make sure all nuts, bolts, screws and pin are in place and tight.
- Adjust the seat position, and make sure you can reach all the controls from the operator's position.
- Fill the fuel tank with fresh fuel. Refer to engine manual for fuel recommendations.

## Briggs & Stratton Cyclonic Models:

### Briggs & Stratton Cyclonic Engine (C, Figure 1)

- Check that the crankcase is filled to the full mark on the crankcase oil fill and dipstick (**D & E**). If necessary, add oil through the engine oil fill. See the engine Operator's manual for instructions and oil recommendations.
- Make sure all nuts, bolts, screws and pins are in place and tight.
- Adjust the seat position, and make certain you can reach all the controls from operator's position.
- Fill the fuel tank with fresh fuel. Refer to engine manual for fuel recommendations.

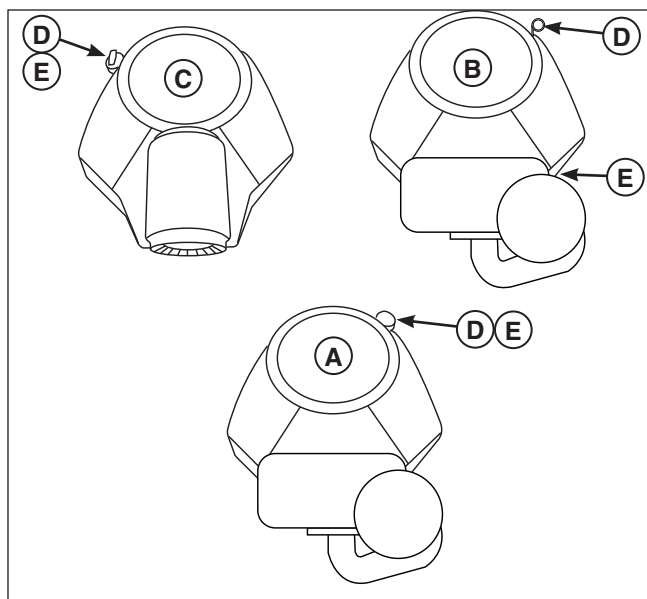


Figure 1. Pre-start checks

## Check Tire Pressures

Tire pressure should be checked periodically, and maintained at the levels shown in the chart. Note that these pressures may differ slightly from the "Max Inflation" stamped on the side-wall of the tires. The pressures shown provide proper traction, improve cut quality, and extend tire life.

Tire	Pressure	
	psi	bar
Front	25	1,72
Rear	15	1,03

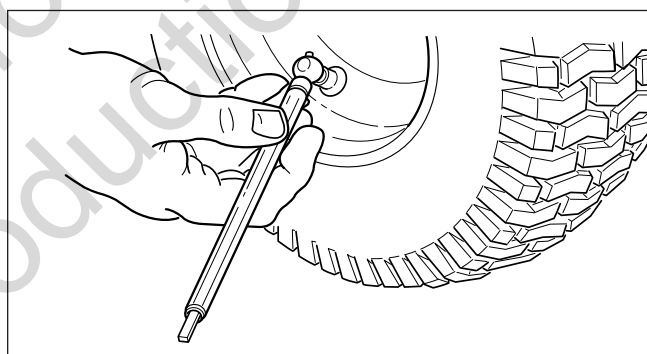


Figure 2. Checking Tire Pressure

## Seat Adjustment

See Figure 3. The seat can be adjusted forward and back. Move the lever (**A, Figure 3**) forward, position the seat as desired, and release the lever to lock the seat into position.

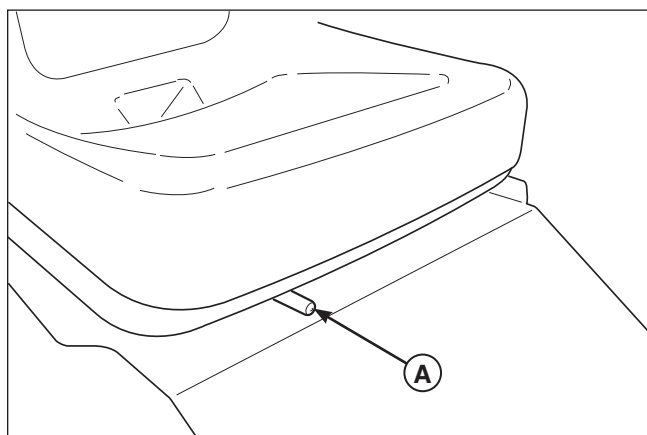


Figure 3. Seat Adjustment  
A. Seat Adjustment Lever

## Pushing the Rider by Hand

### NOTICE

- Towing the unit will cause hydraulic pump and wheel motor damage.
- Do NOT tow rider.
- Do NOT use another vehicle to push or pull this unit.

1. Disengage the PTO, engage the parking brake, turn the ignition OFF, and remove the key.
2. Lift the seat plate to gain access to the hydraulic pumps.
3. To disengage the pumps (free-wheel position), turn the hydraulic release valves (**A**, **Figure 4**) located on the pumps **counter-clockwise** a maximum of 2 full turns.
4. Disengage the parking brake.  
The rider can now be pushed by hand.
5. After moving the rider, re-engage the pumps (drive position) by turning the release valves **clockwise** and tighten to 80-120 in. lbs. (9.04 - 13.56 Nm) of torque.

## Mowing Height Adjustment

The cutting height adjustment pin (**A**, **Figure 5**) controls the mower cutting height. The cutting height is adjustable between 1-3/4" (4,4 cm) and 5" (12,7 cm) in 1/4" (0,64 cm) increments.

1. Depress the deck lift foot pedal (**B**) until it locks into the 5" (12,7 cm) position.
2. Place the cutting height adjustment pin in the desired cutting height.
3. Depress the deck lift foot pedal then push the lock lever (**C**) towards the right to release the lock.
4. Release the deck lift foot pedal until it comes to rest against the cutting height adjustment pin.

## Foot Pedal Adjustment

The deck lift foot pedal can be adjusted to accommodate the operator's height for optimal comfort.

### To Adjust Pedal Position:

1. Remove the foot pedal (**A**, **Figure 6**) from the pedal mount tab (**B**).
2. Remove the pedal mount hardware (**C**) and rotate the tab 180 degrees.
3. Reinstall the pedal mount hardware and tighten securely.
4. Reinstall the foot pedal on the pedal mount tab in the proper orientation as shown in Figure 6.

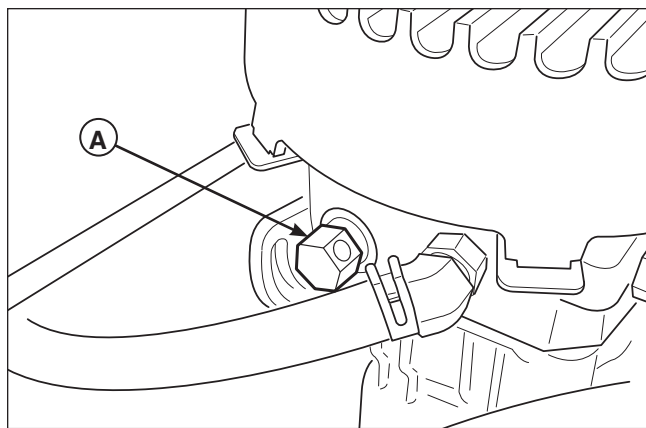


Figure 4. Hydraulic System By-Pass  
A. Hydraulic Release Valve (left-hand pump shown)

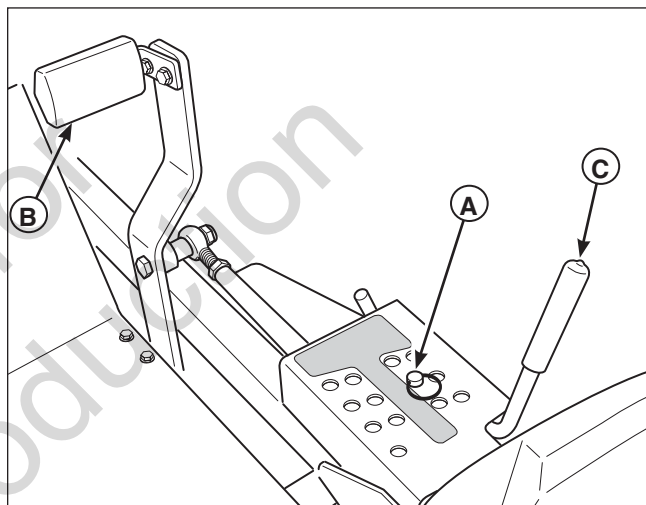


Figure 5. Mowing Height Adjustment  
A. Cutting Height Adjustment Pin  
B. Deck Lift Foot Pedal  
C. Deck Lift Lock Lever

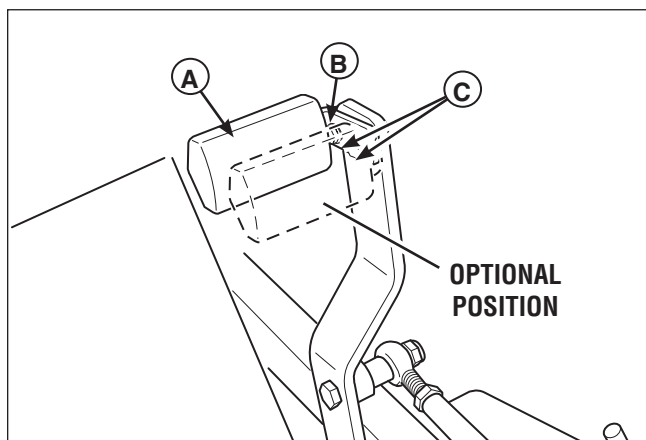


Figure 6. Foot Pedal Adjustment  
A. Deck Lift Foot Pedal  
B. Pedal Mount Tab  
C. Pedal Mount Hardware



**⚠ WARNING**



**Read the Operator's Manual before attempting to operate the machine.**

- If you do not understand how a specific control functions, or have not yet thoroughly read the FEATURES and CONTROLS section, do so now.
- Do NOT attempt to operate the rider without first becoming familiar with the location and function of ALL controls.

## Starting the Engine

1. While sitting in the operator's seat, engage the parking brake and make sure the PTO switch is disengaged and the motion control handles are locked in the NEUTRAL position.
2. **NOTE: A warm engine may not require choking.**  
Set the engine throttle control to FAST throttle position. Then fully close the choke by pulling the knob OUT fully.
3. Insert the key into the ignition switch and turn it to START.
4. After the engine starts, gradually open the choke (push knob down fully). Reduce to half throttle speed and allow to warm up.

*Warm up the engine by running it for at least a minute before engaging the PTO switch or driving the rider.*

5. **After warming the engine, ALWAYS operate the unit at FULL THROTTLE when mowing.**

***In the event of an emergency the engine can be stopped by simply turning the ignition switch to STOP.***

*Use this method only in emergency situations. For normal engine shut down follow the procedure given in STOPPING THE RIDER.*

## Stopping the Rider

1. Returning the ground speed control levers to the middle position will stop rider movement. Pivot the levers outward and lock them in NEUTRAL.
2. Disengage the PTO by pushing down on the PTO switch.
3. Engage the parking brake by pulling the handle up until it locks into position.
4. Move the throttle control to mid-throttle position and turn the ignition key to OFF. Remove the key.

### Zero-Turn Driving Practice

The lever controls of the Zero Turn rider are responsive, and learning to gain a smooth and efficient control of the rider's forward, reverse, and turning movements will take some practice.

Spending some time going through the maneuvers shown and becoming familiar with how the unit accelerates, travels, and steers — before you begin mowing — is absolutely essential to getting the most out of the Zero Turn rider.

**Locate a smooth, flat area of your lawn** — one with plenty of room to maneuver. (Clear the area of objects, people and animals before you begin.) Operate the unit at mid-throttle during this practice session (ALWAYS operate at full throttle when mowing), and turn slowly to prevent tire slippage and damage to your lawn.

We suggest you begin with the Smooth Travel procedure to the right, and then advance through the forward, reverse, and turning maneuvers.

You must release the parking brake prior to moving the control levers inward.

### Smooth Travel

The lever controls of the Zero Turn rider are responsive.

The BEST method of handling the ground speed control levers is in three steps — as shown in Figure 7.

FIRST place your hands onto the levers as shown.

SECOND, to go forward gradually push the levers forward with your palms.

THIRD, to speed up move the levers farther forward. To slow down smoothly, slowly move the levers toward neutral.

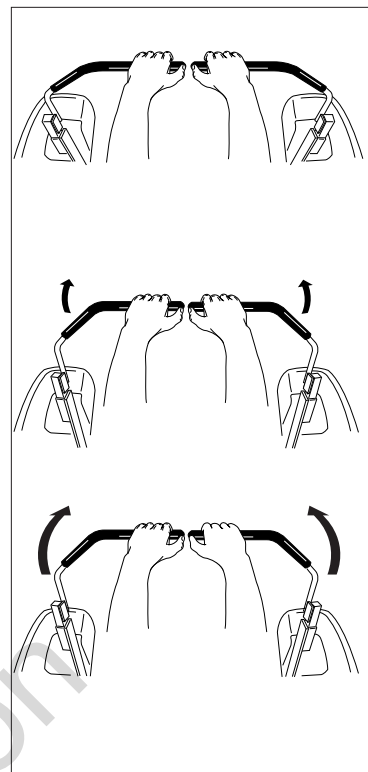


Figure 7. Move Control Levers Gradually

## Basic Driving

### Forward Travel Practice

Gradually move both ground speed control levers — evenly FORWARD from neutral. Slow down and repeat.

*NOTE: Straight forward travel takes practice. If necessary, top speed can be balance-adjusted — see the Speed Balancing Adjustment in the Adjustments section near the back of this manual.*

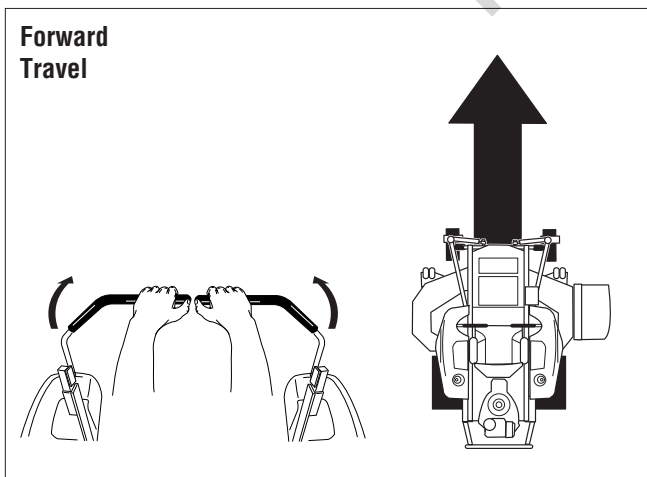


Figure 8. Forward Travel

### Reverse Travel Practice

LOOK DOWN & BEHIND, then gradually move both ground speed control levers evenly BACK from neutral. Slow down and repeat.

*NOTE: Practice backing up for several minutes before attempting to do so near objects. The rider turns sharply in reverse as well as forward, and backing up straight takes practice.*

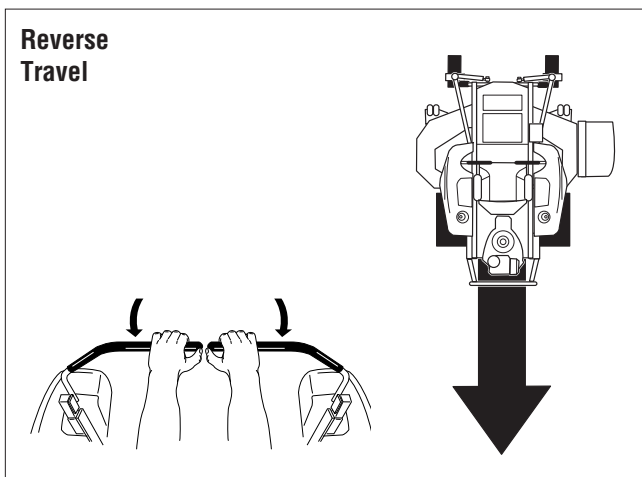


Figure 9. Reverse Travel

## Practice Turning Around a Corner

While traveling forward allow one handle to gradually return back toward neutral. Repeat several times.

*NOTE: To prevent pivoting directly on the tire tread, it is best to keep both wheels going at least slightly forward.*

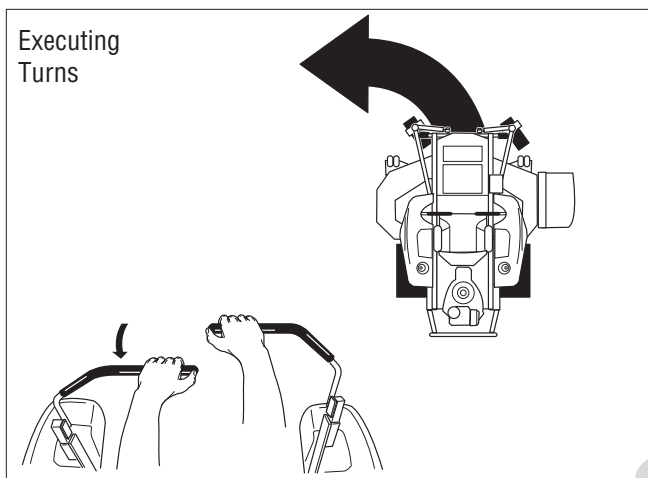


Figure 10. Turning Around a Corner

## Practice Turning In Place

To turn in place, “Zero Turn,” gradually move one ground speed control lever forward from neutral and one lever back from neutral simultaneously. Repeat several times.

*NOTE: Changing the amount each lever is pulled—forward or back, changes the “pivot point” you turn on.*

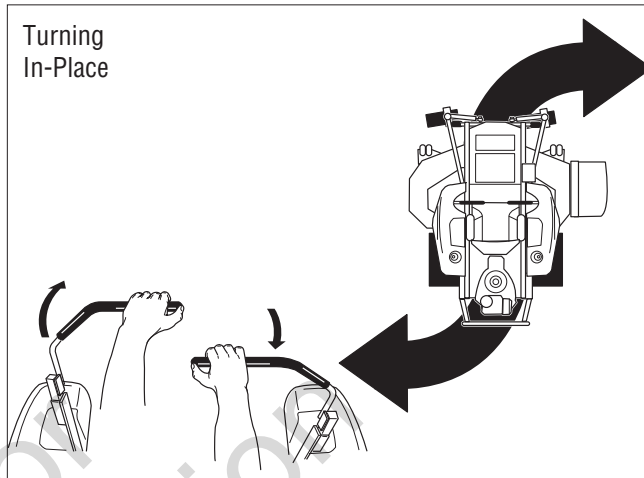


Figure 11. Turning in Place

## Advanced Driving

### Executing an End-Of-Row Zero Turn

Your Zero Turn Rider’s unique ability to turn in place allows you to turn around at the end of a cutting row rather than having to stop and Y-turn before starting a new row.

For example, to execute a left end-of row zero turn:

1. Slow down at the end of the row.
2. Move the RIGHT ground speed control lever forward slightly while moving the LEFT ground speed control lever back to center and then slightly back from center.
3. Begin mowing forward again.

This technique turns the rider LEFT and slightly overlaps the row just cut —eliminating the need to back up and re-cut missed grass.

*As you become more familiar and experienced with operating the Zero Turn rider, you will learn more maneuvers that will make your mowing time easier and more enjoyable.*

Remember, the more you practice, the better your control of the Zero Turn will be!

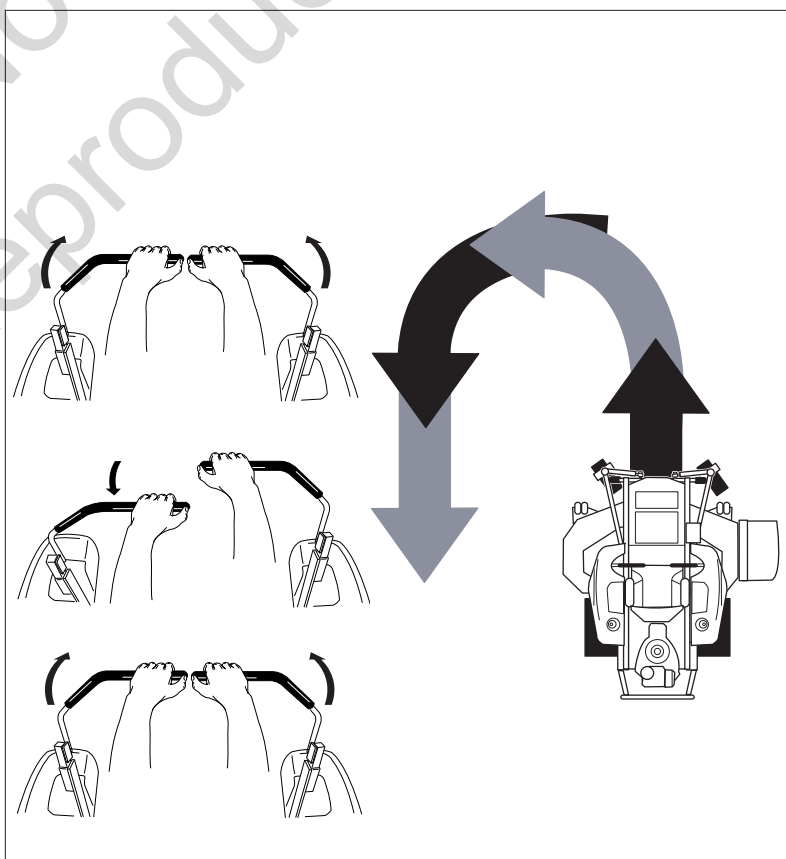




Figure 12. Executing an End-Of-Row Turn

## Raise and Lower the Roll Bar

 <b>WARNING</b>	
	<b>Avoid serious injury or death from roll over.</b>
<ul style="list-style-type: none"> <li>• Keep the roll bar in the raised position and use seat belt.</li> <li>• <b>There is no roll over protection when the roll bar is down.</b></li> <li>• Lower the roll bar only when necessary and NEVER remove it.</li> <li>• Do NOT use the seat belt when the roll bar is down.</li> <li>• Raise the roll bar as soon as clearance permits.</li> <li>• Do NOT jump off if mower tips.</li> </ul>	

### To Lower the Roll Bar:

1. Pull the hair pin clips (A, Figure 13) out of the retainer pins (B).
2. Push or pull the top of the roll bar (C) forward against the rubber stops (D) and remove the retainer pins (B).
3. Lower the roll bar and reinstall the retainer pins and hair pin clips to secure the roll bar in the down position (see insert, Figure 13).

### To Raise the Roll Bar:

1. Pull the hair pin clips (A) out of the retainer pins (B) and remove the retainer pins.
2. Raise the roll bar (C) until the rubber stops (D) contact the upright tubes.
3. Push or pull the top of the roll bar forward against the rubber stops and reinstall the retainer pins and hair pin clips to secure the roll bar in the raised position.

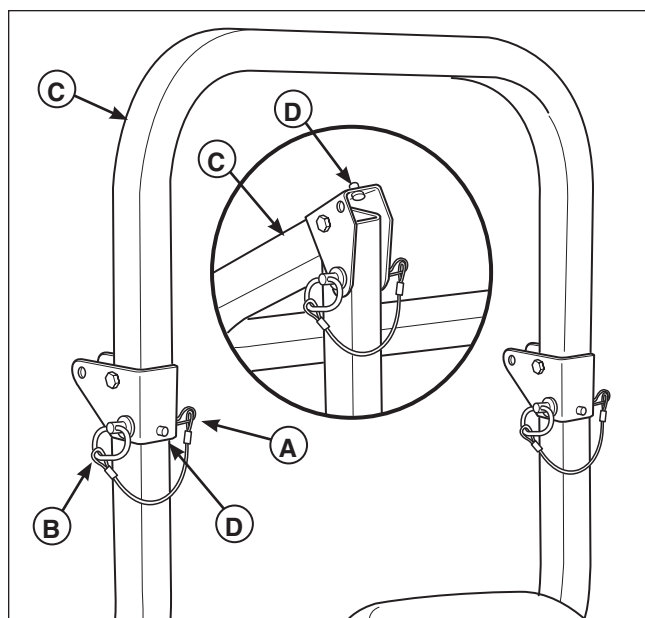





Figure 13. Raise & Lower the Roll Bar

- A. Hair Pin Clip  
B. Retainer Pin  
C. Roll Bar  
D. Rubber Stop

## Storage

 <b>WARNING</b>	
	<b>Fuel and its vapors are extremely flammable and explosive.</b>
	<b>Fire or explosion can cause severe burns or death.</b>
<ul style="list-style-type: none"> <li>• Never store the unit, with gasoline in the engine or the fuel tank, in a heated shelter or in enclosed, poorly ventilated enclosures. Gasoline fumes may reach an open flame, spark or pilot light (such as a furnace, water heater, clothes dryer, etc.) and cause an explosion.</li> <li>• Handle gasoline carefully. It is highly flammable and careless use could return in serious fire damage to your person or property.</li> <li>• Drain fuel into an approved container outdoors away from open flame or sparks.</li> </ul>	

Before you store your unit for the off-season, read the Maintenance and Storage instructions in the Safety Rules section, then perform the following steps:

- Disengage the PTO, set the parking brake, & remove the key.
- Perform engine maintenance and storage measures listed in the engine owner's manual. This includes draining the fuel system, or adding stabilizer to the fuel (do not store a fueled unit in an enclosed structure - see warning).
- Battery life will be increased if it is removed, put in a cool, dry place and fully charged about once a month. If the battery is left in the unit, disconnect the negative cable.

Before starting the unit after it has been stored:

- Check all fluid levels. Check all maintenance items.
- Perform all recommended checks and procedures found in engine owner's manual.
- Allow the engine to warm up for several minutes before use.

## Mowing

Before mowing, set the cutting height as described in the *Operation* section.

1. Engage the parking brake. Make sure the PTO switch is disengaged and the ground speed control levers are in the NEUTRAL position.
2. Start the engine (see *Starting the Engine*).
3. Set the throttle to FULL.
4. Engage the PTO by pulling up on the PTO switch.
5. Begin mowing. See *Mowing Recommendations* section for tips on mowing patterns and lawn care. See Troubleshooting section for information on troubleshooting common cutting problems.
6. When finished, shut off the PTO.
7. Stop the engine (see *Stopping the Rider and Engine*).

## Mowing Recommendations

Several factors can affect how well your machine cuts grass. Following proper mowing recommendations can improve the performance and life of your machine.

### Height of Grass

Often cutting height is a matter of personal preference. Typically, you should mow the grass when it is between three and five inches high. The proper cutting height range for a specific lawn will depend upon several factors, including the type of grass, the amount of rainfall, the prevailing temperature, and the lawn's overall condition.

Cutting the grass too short causes weak, thin grass plants, which are easily damaged by dry periods and pests. Cutting too short is often more damaging than allowing the grass to be slightly higher.

Letting grass grow a bit longer—especially when it is hot and dry—reduces heat build-up, preserves needed moisture and protects the grass from heat damage and other problems. However, allowing grass to grow too high can cause thin turf and additional problems.

Cutting off too much at one time shocks the plant's growth system and weakens the grass plants. **A good rule of thumb is the 1/3 rule: to cut no more than one third of the grass height, and never more than 1 inch at a time.**

The amount of grass you are able to cut in one pass is also effected by the type of mowing system you are using (for example, broadcasting with side discharge decks can process a much larger volume of grass than mulching does).

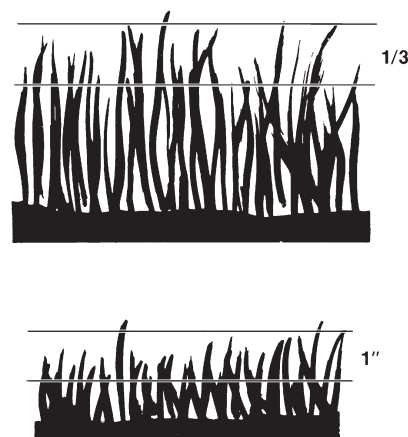


Figure 14. Proper Cutting Height

### Tall Grass Requires Incremental Cutting

For extremely tall grass, set the cutting height at maximum for the first pass, and then reset it to the desired height and mow a second or third time.

Don't cover the grass surface with a heavy layer of clippings. Consider using a grass collection system and starting a compost pile.

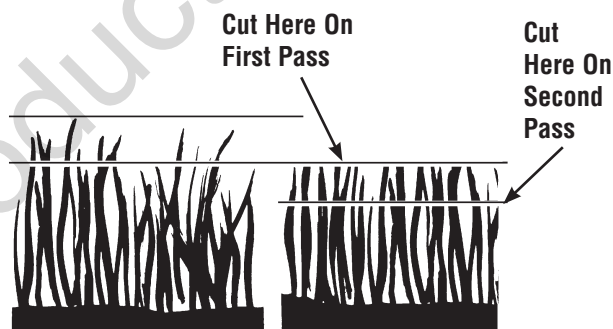


Figure 15. Incremental Cutting

## When and How Often to Mow

The time of day and condition of the grass greatly affect the results you'll get when mowing. For the best results, follow these guidelines:

1. Mow when the grass is between three and five inches high.
2. Mow with sharp blades. Short clippings of grass one inch or shorter decompose more quickly than longer blades. Sharp mower blades cut grass cleanly and efficiently, preventing frayed edges which harm the grass.
3. Mow at time of day when the grass is cool and dry. Late afternoon or early evening often provide these ideal mowing conditions.
4. Avoid mowing after rain or even heavy dew, and never mulch when the grass is wet (moist grass does not mulch well, and clumps beneath the mower deck).

## Mowing Patterns


Always start mowing on a smooth, level area.

The size and type of area to be mowed will determine the best mowing pattern to use. Obstructions such as trees, fences and buildings, and conditions such as slopes and grades must also be considered.


1. Cut long straight strips overlapping slightly.
2. Where possible, change patterns occasionally to eliminate matting, graining or a corrugated appearance.
3. For a truly professional cut, mow across the lawn in one direction, then recut the lawn by mowing perpendicular to the previous cut.

**Note:** Always operate the engine at full throttle when mowing.

If you hear the engine slowing down, you are mowing too fast—using a slower ground speed will improve the cutting efficiency of the blades and prevents many common cutting problems. Use an appropriate ground speed for the thickness and height of the grass you are cutting (3rd gear or slower for manual gear models). If you hear the engine slowing down you are mowing too fast, use a slower ground speed.

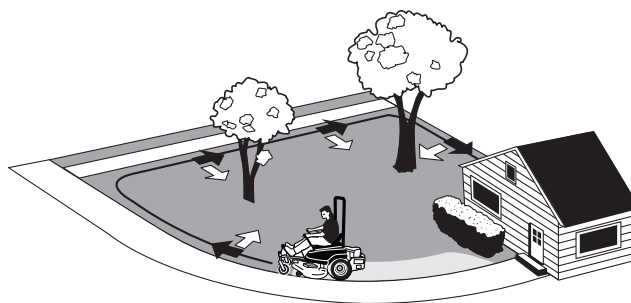

*Where possible, make one or two passes around the outside of the area discharging the grass INTO the lawn to keep the cut grass off fences and walks.*

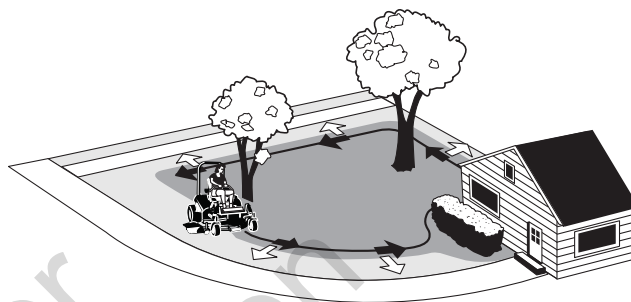

*The remainder of the mowing should be done in the opposite direction so that the clippings are dispersed OUT onto the area of lawn previously cut.*

## Mowing Methods

### Proper Broadcast Mowing

Broadcasting, or side-discharging, disperses fine clippings evenly over the entire lawn. Many golf courses use this method. Your mower has a deep dish deck to allow freer circulation of clippings so they are broadcast evenly over the lawn.

### Engine Speed & Ground Speed for Broadcasting

Always operate the engine at full throttle when mowing. If you hear the engine slowing down, you are mowing too fast—using a slower ground speed will improve the cutting efficiency of the blades and prevents many common cutting problems.

ALWAYS use an appropriate ground speed for the thickness and height of the grass you are cutting (3rd gear or slower for manual gear models). If you hear the engine slowing down you are mowing too fast, use a slower ground speed.

### How Much Grass to Cut Off When Broadcasting

Mow when the grass is 3-5 inches long. Do not cut the grass shorter than 2 to 2-1/2 inches. Do not cut off more than 1 inch of grass in a single pass.



## Proper Mulching

Mulching consists of a mower deck which cuts and recuts clippings into tiny particles and which then blows them down INTO the lawn. These tiny particles decompose rapidly into by-products your lawn can use. UNDER PROPER CONDITIONS, your mulching mower will virtually eliminate noticeable clippings on the lawn surface.

NOTE: When mulching under heavy cutting conditions, a rumbling sound may be present and is normal.

## Mulching Requires EXCELLENT Mowing Conditions

Mulching mowers cannot function properly if the grass is wet, or if the grass is simply too high to cut. Even more than normal mowing, mulching requires that the grass be dry and the appropriate amount is cut.

Do not use the mower as a mulching mower during the first two or three mowings in the spring. The long grass blades, quick growth, and often wetter conditions are more suitable for broadcasting (side-discharging) or grass bagging operation.

## Engine Speed & Ground Speed for Broadcasting

Use full engine throttle matched with a slow ground speed so that clippings will be finely cut. Ground speed while mulching should be HALF of the speed that would be used when broadcasting (side discharging) under similar conditions. Since mulching requires more horsepower than broadcasting, using a slower ground speed is vitally important for proper mulching operation.

## How Much Grass to Mulch

The best mulching action typically results from cutting only the top 1/2 inch to 3/4 inch of grass blade. This provides short clippings which decompose properly (much more quickly than longer clippings). The ideal cutting height will vary with climate, time of year, and quality of your lawn. We recommend that you experiment with both the cutting height and ground speed until you achieve the best cut. Start with a high cutting height and using progressively lower settings until you find a cutting height that is matched to your mowing conditions and preferences.

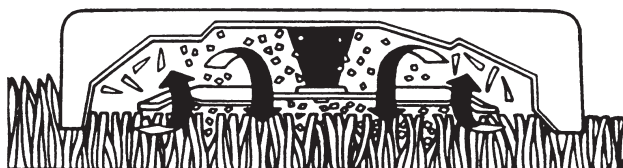


Figure 16. Mulching Action

## Attaching a Trailer

The maximum weight of a towed trailer should be less than 200 lbs (91kg). Secure the trailer with an appropriately sized clevis pin (A, Figure 17) and clip (B).

Excessive towed loads can cause loss of traction and loss of control on slopes. Reduce towed weight when operating on slopes. The surface being driven on greatly impacts traction and stability. Wet or slippery surfaces can greatly reduce traction and the ability to stop or turn. Carefully evaluate the surface conditions before operating the unit and trailer, and never operate on slopes greater than 10°. See SLOPE OPERATION and TOWED EQUIPMENT in the safety section of this manual for additional safety information.

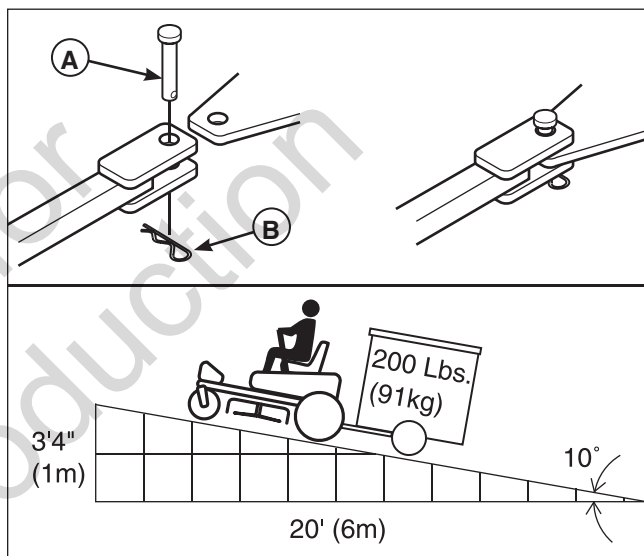


Figure 17. Trailer Weight Recommendations

- A. Clevis Pin
- B. Clip

## Regular Maintenance

### Maintenance Schedule

The following schedule should be followed for normal care of your rider and mower. You will need to keep a record of your operating time. Determining operating time is easily accomplished by observing the elapsed time recorded by the hour meter.

<b>RIDER MAINTENANCE</b>
<b>Before Each Use</b>
Check Safety Interlock System
Check Rider Brakes
Check Mower Blade Stopping Time
Check Rider / Mower for loose hardware
<b>Every 100 Hours or Annually*</b>
Clean Deck & Check / Replace Mower Blades
Lubricate Rider & Mower
Clean Battery & Cables
Check Tire Pressure
Check Hydraulic Oil
<b>Every 25 Hours or Annually</b>
Change Hydraulic Oil Filter

\* Whichever comes first

\*\* More often in hot (over 85°F; 30°C) weather or dusty operating conditions

<b>ENGINE MAINTENANCE</b>
<b>Before Each Use</b>
Check Engine Oil Level
<b>Every 25 Hours</b>
Check & Clean Cooling Fins & Intake
<b>Every 50 Hours</b>
Check / Clean Spark Arrester**
<b>Refer to Engine Manufacturer's Owner's Manual</b>
Service Air Filter
Change Oil & Filter*
Check / Replace Spark Plugs
Check / Replace Fuel Filter

\* More often in hot (over 85°F; 30°C) weather or dusty operating conditions

\*\* If equipped. Replace if damaged.

## Checking / Adding Fuel

To add fuel:

1. Stop the engine and allow to cool for at least 3 minutes.
2. Remove the fuel cap (see **Figure 1**).
3. Fill the tank to the bottom of the filler neck. This will allow for fuel expansion.

**NOTE:** Do not overfill. Refer to your engine manual for specific fuel recommendations.

4. Install and hand tighten the fuel cap.

## Fuel Filter

The fuel filter is located in the fuel line between fuel tank and carburetor, near the fuel pump. If filter is dirty or clogged, replace as follows:

1. Disconnect the negative battery cable.
2. Place a container below the filter to catch spilled fuel.
3. Using a pliers, open and slide hose clamps from fuel filter.
4. Remove hoses from filter.
5. Install new filter in proper flow direction in fuel line.
6. Secure with hose clamps.
7. Reconnect the negative battery cable when finished.

## Change Oil & Filter

1. Warm engine by running for a few minutes. (Refer to the engine operator's manual for oil & filter replacement instructions.)
2. Remove the oil drain hose (**A**, **Figure 18**) from the cable clamp (**B**) on the right-hand side of the frame and route the hose through hole in the engine deck as shown in **Figure 15**.
3. Place a small pan under the oil drain hose to catch the oil. Using the appropriate tools, remove the cap from the oil drain hose and drain the engine oil.
4. After draining, replace the cap and wipe up any spilled oil. Reinstall the oil drain hose into the cable clamp to retain the hose during normal operation.
5. Place an absorbent shop cloth under the engine oil filter. Remove the engine oil filter and replace with a new one.
6. Remove the shop cloth and wipe up any spilled oil.

## Inspect Muffler and Spark Arrester

Inspect the muffler for cracks, corrosion, or other damage. Remove the spark arrester, if equipped, and inspect for damage or carbon blockage. If replacement parts are required, make sure to use only original equipment replacement parts.

### ⚠ WARNING

Replacement parts must be the same and installed in the same position as the original parts or fire could result.

### ⚠ WARNING




**Fuel and its vapors are extremely flammable and explosive.**

**Fire or explosion can cause severe burns or death.**

- Gasoline is highly flammable and must be handled with care. Never fill the tank when the engine is still hot from recent operation. Do NOT allow open flame, smoking or matches in the area. Avoid over-filling and wipe up any spills.
- Do NOT remove fuel filter when engine is hot, as spilled gasoline may ignite. Do NOT spread hose clamps further than necessary. Ensure clamps grip hoses firmly over filter after installation.

### NOTICE

Do NOT use gasoline containing METHANOL, gasohol containing more than 10% ethanol, gasoline additives, premium gasoline, or white gas because engine/fuel system damage could result.

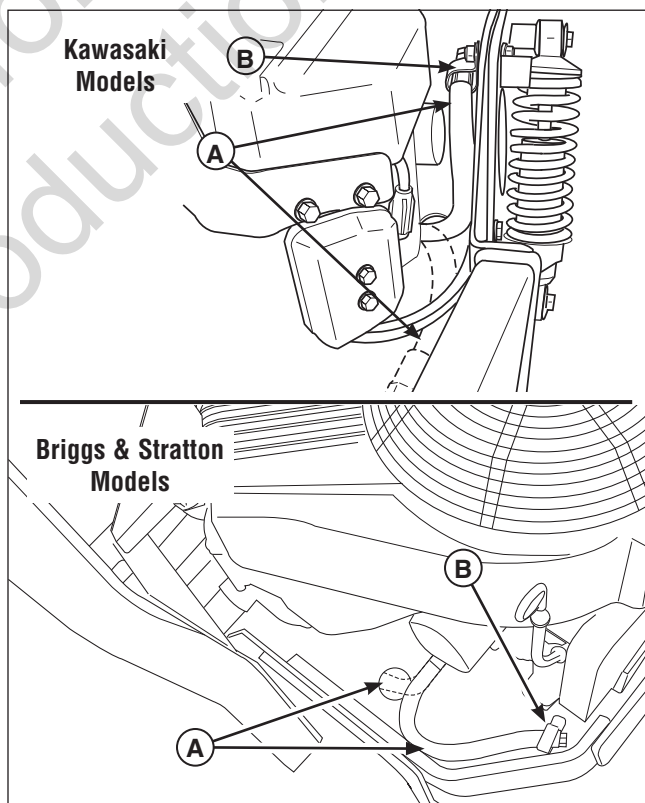

**Figure 18. Engine Oil Drain**

**A. Oil Drain Hose**

**B. Cable Clamp**

### Check Hydraulic Oil Level

1. Before removing the reservoir cap, make sure the area around the reservoir cap and fill neck of the reservoir is free of dust, dirt, or other debris.
2. Unscrew the reservoir cap (**B**, **Figure 19**).
3. Look down the filler neck of the hydraulic oil reservoir (**A**) and observe the oil level. When cold, the oil level should be approximately 4" (10 cm) below top of the filler neck.
4. If necessary, add either Mobil 1™, 15W-50 synthetic oil or Castrol Syntec™ 5W-50 oil. **DO NOT** use conventional oils.
5. Reinstall the reservoir cap.

### Change Hydraulic Oil Filter

**Change Interval:** Every 250 Hours

**Filter Part Number:** 1719168

*NOTE: Removing the oil filter from the filter base will drain the oil reservoir. Have a suitable container ready to catch any spilled oil. Simplicity recommends this be a dealer-only service item.*

1. Locate the transmission oil filter (**A**, **Figure 20**).
2. Lubricate the new filter base with a few drops of transmission oil. Fill the filter half full of oil.
3. Clean the area around the filter base and remove the filter. Do NOT drain the hydraulic system oil.
4. Thread the new filter onto the filter base until the gasket makes contact, then tighten 3/4 of a turn more.
5. Run the unit for several minutes and check the transmission oil level.

*IMPORTANT NOTE: Use caution after changing the filter; air in the hydraulic system may affect the responsiveness of the control levers. Repeat step 5 until the air is out of the system.*

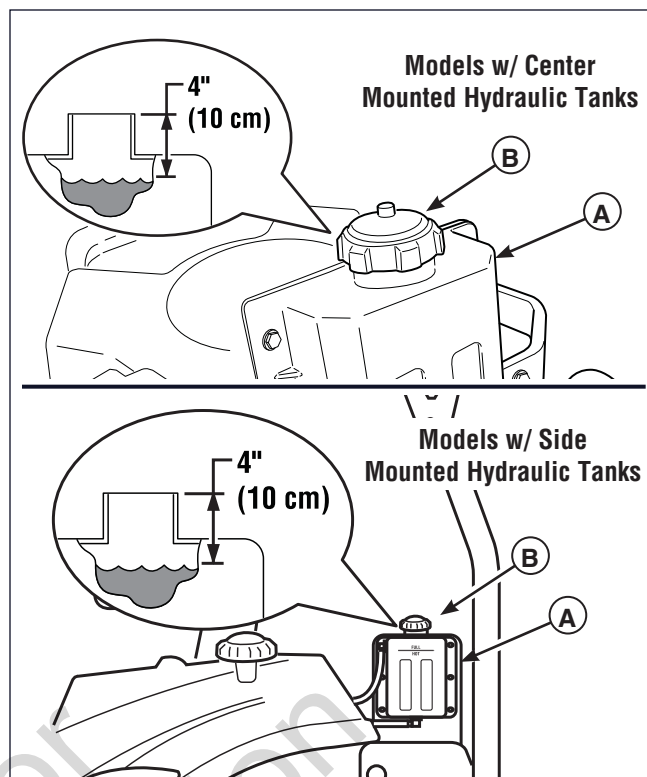


Figure 19. Checking Hydraulic Oil Level

A. Hydraulic Oil Reservoir  
B. Reservoir Cap

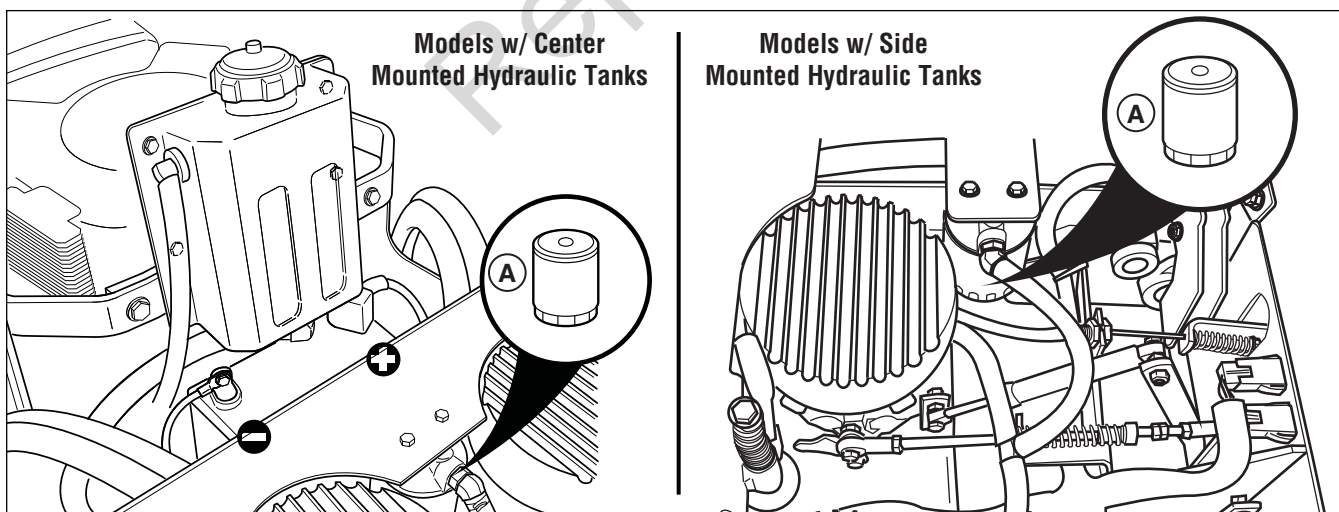


Figure 20. Change Hydraulic Oil Filter

A. Hydraulic Oil Reservoir

## Lubrication

Lubricate the unit at the locations shown in Figures 21 through 24 as well as the following lubrication points.

### Grease:



- Front caster wheel axles & yokes
- Deck lift pivot blocks
- Mower deck spindles
- Mower deck idler arm

Use grease fittings when present. Disassemble parts to apply grease to moving parts when grease fittings are not installed.

Not all greases are compatible. Use automotive-type lithium grease.

### Oil:



- Control handle pivots
- Seat plate pivots
- Deck lift pivots
- Discharge chute hinge

Generally, all moving metal parts should be oiled where contact is made with other parts. Keep oil and grease off belts and pulleys. Remember to wipe fittings and surfaces clean both before and after lubrication.

### Lubricating the Front Casters:

Front casters should be lubricated annually.

1. Remove the 1/4-28 bolt (A, Figure 24) screwed into the front caster and install a 1/4-28 grease fitting.
2. Grease the front caster.
3. Remove the 1/4-28 grease fitting and reinstall the 1/4-28 bolt.
4. Repeat process for the other side of the machine.

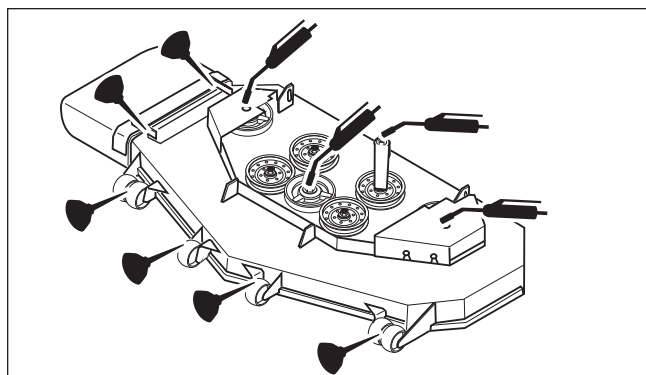


Figure 21. Deck Lubrication

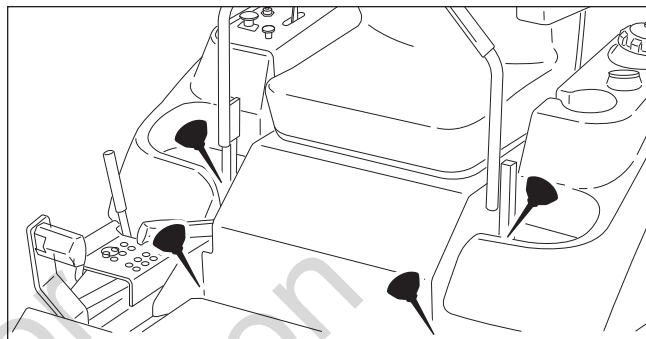


Figure 22. Control Handle Pivots & Seat Plate Pivots

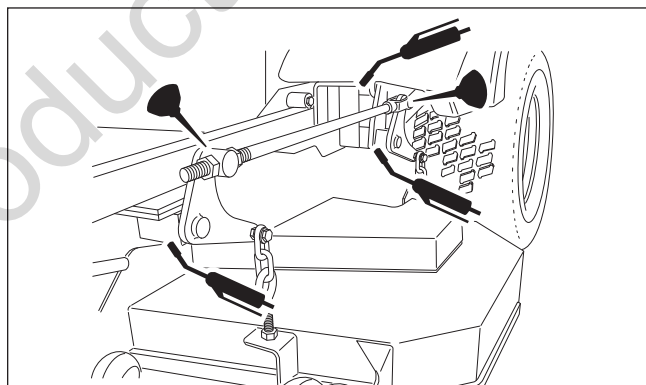


Figure 23. Deck Lift Linkage Pivots

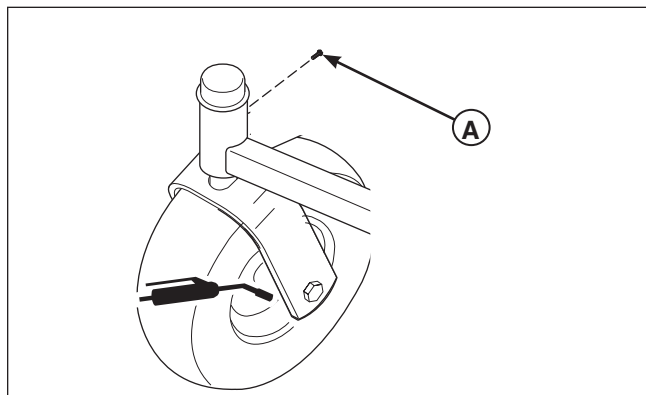



Figure 24. Front Caster & Wheel  
A. 1/4-28 Bolt

## Servicing The Mower Blades

### Removing the Mower Blade

<b>⚠ WARNING</b>	
	<b>Avoid injury! Mower blades are sharp.</b>
Always wear gloves when handling mower blades or working near blades.	

1. Wedge a wooden block between the mower blade and the mower deck housing to keep the mower blade from turning.
2. To remove the mower blade, use a 15/16" wrench to remove the mower blade mounting bolt (**Figure 25**).

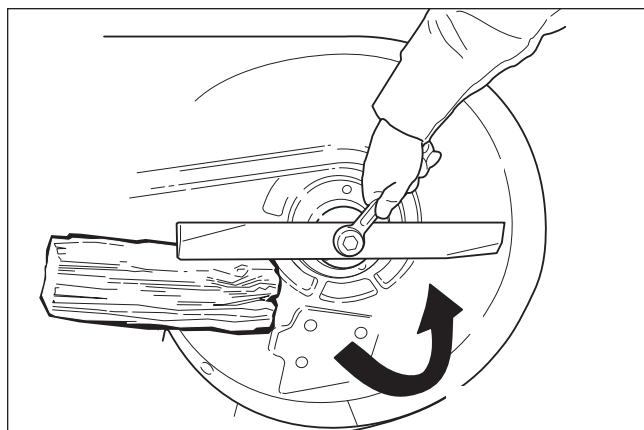



Figure 25. Loosening the Mower Blade for Removal

### Inspecting the Mower Blades

<b>⚠ WARNING</b>	
	<b>Avoid injury! A worn or damaged blade can break, and a piece of the mower blade could be thrown into the operator's or bystander's area, resulting in serious personal injury or death.</b>
<ul style="list-style-type: none"> <li>• Inspect the mower blade every 25 hours or at least once a year.</li> <li>• If the mower blade hits a solid object, stop the engine immediately and inspect the mower blades.</li> <li>• Never weld or straighten bent mower blades.</li> </ul>	

1. Inspect the mower blade (**Figures 26 & 27**). **Discard the mower blade if it has any of the below conditions.**
  - Has more than .5" (12,7 mm) of the mower blade metal removed from previous sharpening or wear (**D**, **Figure 26**).
  - The air lifts are excessively eroded (**B & C**, **Figure 27**) and the notch (**C**) is .25" (6,35 mm) deep or greater.
  - Mower blade is bent or broken.
2. If the cutting edges are not sharp or have nicks, sharpen the blades. *See Sharpening the Mower Blades.*

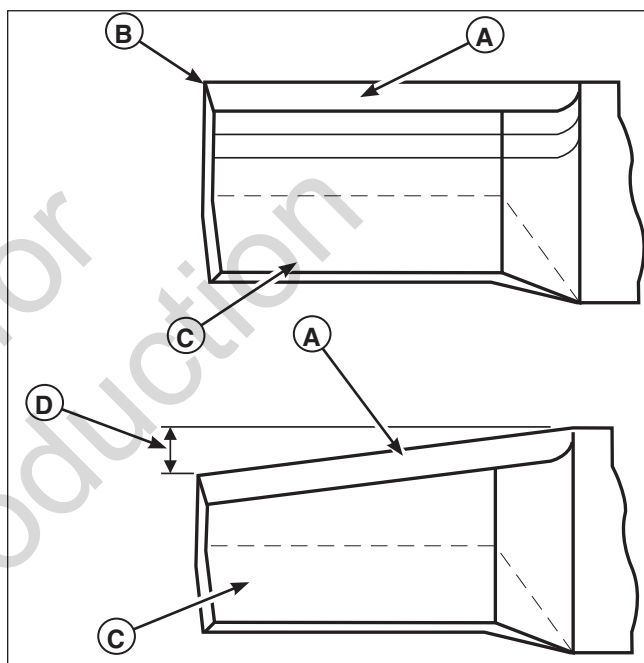


Figure 26. Inspecting the Mower Blade Tips

- A. Mower Blade Cutting Edge
- B. Square Corner
- C. Air Lift
- D. Wear Measurement - **DISCARD** Mower Blade If greater than .5" (12,7 mm)

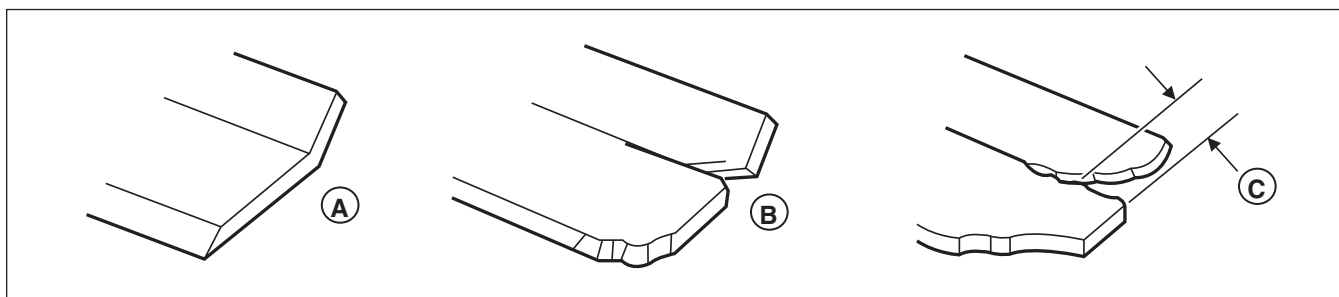



Figure 27. Inspecting the Mower Blade Air Lifts

- A. New Mower Blade
- B. Mower Blade at Wear Limit (A notch begins to form)
- C. Mower Blade in Dangerous Condition (Notch measures .25" (6,35 mm) or greater **DO NOT USE**. Replace with new mower blade.)




## Sharpening the Mower Blade

<b>⚠ WARNING</b>	
	<b>Avoid injury! Mower blades are sharp.</b>
<ul style="list-style-type: none"> <li>Always wear gloves when handling mower blades or working near blades.</li> <li>Always wear safety eye protection when grinding.</li> </ul>	

1. Sharpen the mower blades with grinder, hand file, or electric blade sharpener.
2. Sharpen the mower blade by removing an equal amount of material from each end of the mower blade.
3. Keep the original bevel (**A**, **Figure 28**) when grinding. DO NOT change the mower blade bevel.
4. The mower blade should have a maximum 1/64" (0,40 mm) cutting edge (**B**) or less.
5. Balance the mower blades before installing.

## Balancing the Mower Blades

<b>⚠ WARNING</b>	
	<b>Avoid injury! Keep mower blades balanced.</b>
An unbalanced mower blade can create excessive vibration and damage the unit or cause mower blade failure.	

1. Clean the mower blade to remove any dried grass or other debris.
2. See Figure 29. Put the mower blade on a nail in a vise and turn the mower blade to the horizontal position.
3. Check the balance of the mower blade. If either end of the mower blade moves downward, sharpen the heavy end until the mower blade is balanced. See *Sharpening the Mower Blades* for proper sharpening instructions.
4. Repeat the process until the mower blade remains in the horizontal position.

## Reinstalling the Mower Blades

1. Wedge a wooden block between the mower blade and the mower deck housing to keep the mower blade from turning.
2. Reinstall each mower blade with the air lifts pointing up towards the mower deck as shown in Figure 30. Secure with the mower blade mounting bolt and flat washer (**A & B**, **Figure 30**) and torque to 70 ft. lbs (94 Nm).

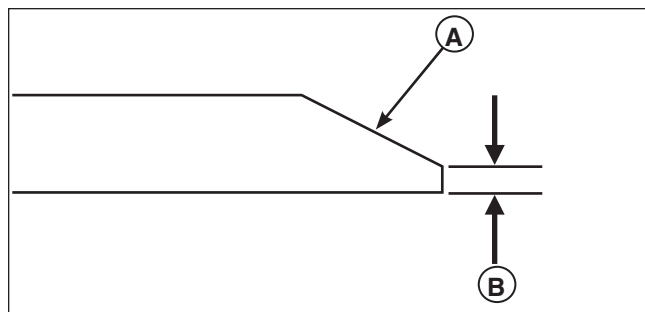


Figure 28. Sharpening the Mower Blade

A. Mower Blade Bevel

B. Mower Blade Cutting Edge

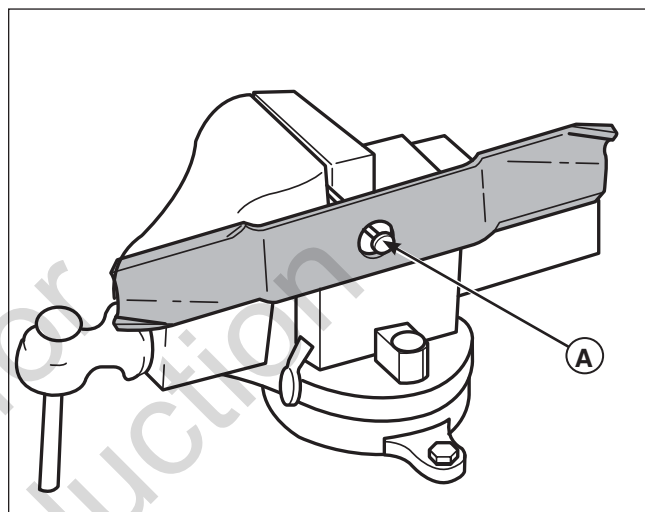


Figure 29. Balancing the Mower Blade

A. Nail

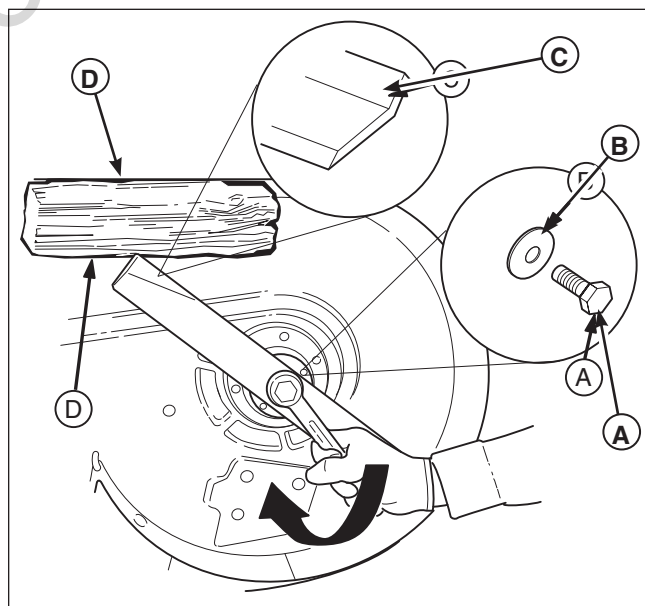


Figure 30. Tightening the Mower Blade for Installation

A. Mower Blade Mounting Bolt

B. Flat Washer

C. Mower Blade Air Lift (Points Up For Installation)

D. 4 X 4 Wooden Block

### Battery Maintenance

This unit is equipped with a maintenance-free BCIU1 battery.

#### Battery Charging

A dead battery or one too weak to start the engine may be the result of a defect in the charging system or other electrical component. If there is any doubt about the cause of the problem, see your dealer. If you need to replace the battery, follow the steps under Cleaning the Battery and Cables section.

To charge the battery, follow the instructions provided by the battery charger manufacturer as well as all warnings included in the safety rules section of this book. Charge the battery until fully charged (until the specific gravity of the electrolyte is 1.250 or higher and the electrolyte temperature is at least 60°F). Do NOT charge at a rate higher than 10 amps.

#### Cleaning the Battery and Cables - Models with Center Mounted Hydraulic Tanks

1. Remove the hydraulic oil reservoir mounting hardware (**C, Figure 31**) and move the reservoir (**D**) forward to expose the battery.
2. Disconnect the cables from the battery, negative (black) cable (**B**) first.
3. Clean the battery terminals and cable ends with a wire brush until shiny.
4. Reinstall the battery and reattach the battery cables, positive (red) cable (**A**) first.
5. Coat the cable ends and battery terminals with petroleum jelly or non-conducting grease.
6. Reposition the oil reservoir and secure in place with the hardware previously removed.

#### Cleaning the Battery and Cables - Models with Side Mounted Hydraulic Tanks:

1. Disconnect the cables from the battery, negative (black) cable (**B**) first.
2. Clean the battery terminals and cable ends with a wire brush until shiny.
3. Reinstall the battery and reattach the battery cables, positive (red) cable (**A**) first.
4. Coat the cable ends and battery terminals with petroleum jelly or non-conducting grease.

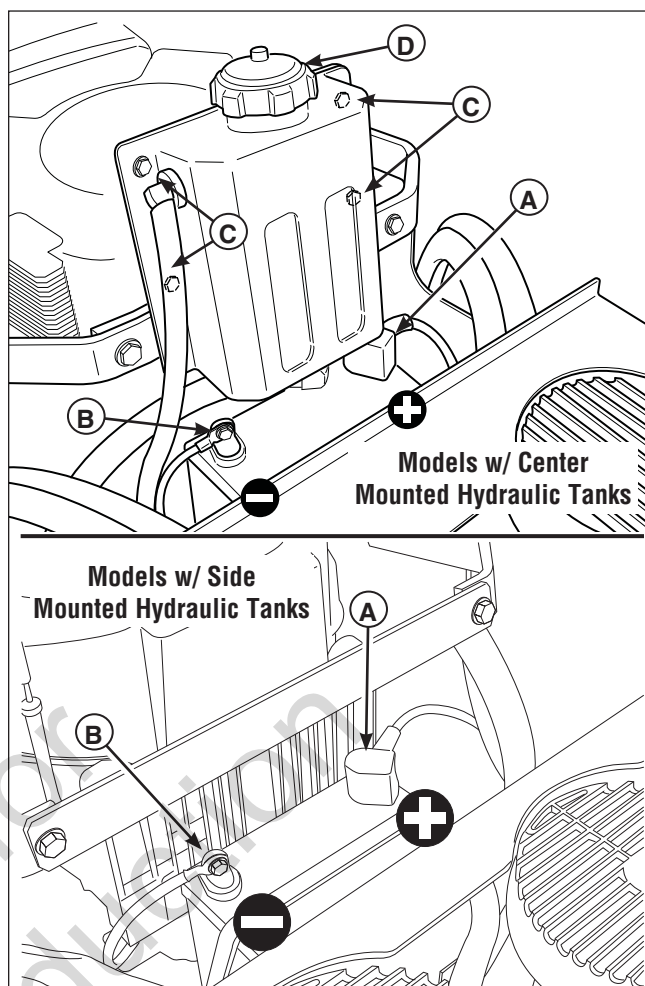


Figure 31. Battery Compartment

- A. Positive (+) Cable & Terminal
- B. Negative (-) Cable & Terminal
- C. Reservoir Mounting Hardware
- D. Hydraulic Oil Reservoir

#### ⚠ WARNING



**Keep open flames and sparks away from the battery.**

- Be careful when handling the battery. Avoid spilling electrolyte. Keep flames and sparks away from the battery.
- When removing or installing battery cables, disconnect the negative cable FIRST and reconnect it LAST. If not done in this order, the positive terminal can be shorted to the frame by a tool.

## Ground Speed Control Lever Adjustment

The control levers can be adjusted in three ways. The alignment of the control levers, the placement of the levers (how close the ends are to one another) and the height of the levers can be adjusted.

### To Adjust the Lever Alignment

Loosen the mount bolts (**A**, **Figure 32**) and pivot the lever(s) (**C**) to align with each other.

### To Adjust the Lever Placement

Loosen the jam nuts and adjust the placement bolt (**B**) in or out to properly adjust the lever end spacing.

### To Adjust the Lever Height

Remove the mounting hardware and reposition the handle either up or down from its original position. You will need to readjust the handle alignment as described above.

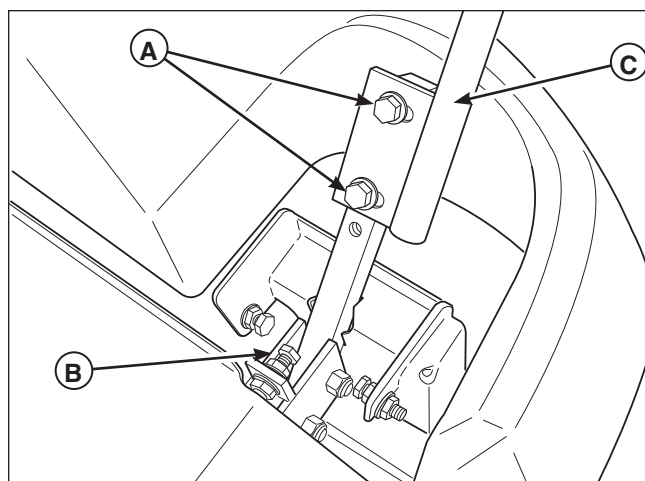


Figure 32. Control Lever Adjustment

- A. Alignment Hardware
- B. Placement Hardware
- C. Ground Speed Control Lever

## Speed Balancing Adjustment

If the rider veers to the right or left when the ground speed control levers are in the maximum forward position, the top speed of each of these levers can be balanced by turning the adjustment bolt(s) (**A**, **Figure 33**). Only adjust the speed of the wheel that is traveling faster.

### To Reduce the Speed of the Faster Wheel

1. Loosen the securing nut.
2. Turn the top speed adjustment bolt **counter-clockwise** to reduce the speed.
3. Retighten the securing nut when adjustment is complete.

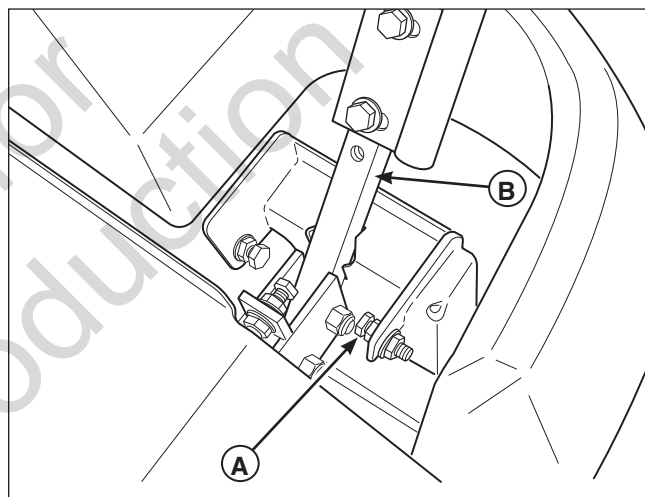


Figure 33. Top Speed Adjustment

- A. Top Speed Adjustment Bolt
- B. Control Lever Base

## ⚠ WARNING

Do NOT adjust the rider for a faster overall speed forward or reverse than it was designed for.

### Neutral Adjustment


If the rider “creeps” while the ground speed control levers are locked in the NEUTRAL position, then it may be necessary to adjust the linkage rod.

1. Park the machine on a hard, level surface such as a concrete floor. Disengage the PTO, engage the parking brake, and turn off the engine.

#### **WARNING**

This adjustment should not be performed while the machine is running.

2. The locking nuts (**D**, **Figure 34**) are to be used together to turn the rod. Loosen the jam nut that locks against the ball joint (**C**) and turn the linkage rod (**A**) to adjust.
  - If the machine creeps forward, turn the rod clockwise (while standing at the rear of the machine, facing forward).
  - If the machine creeps backward, turn the rod counter-clockwise (while standing at the rear of the machine, facing forward).
3. Lock the jam nut (**B**) against the ball joint (**C**) when neutral is achieved.
4. Start the engine.
5. Disengage the parking brake and lock the ground speed control levers in the neutral position.
6. If the machine still “creeps,” repeat the Neutral Adjustment procedure. It may take several attempts to achieve neutral, depending on how much the machine creeps.

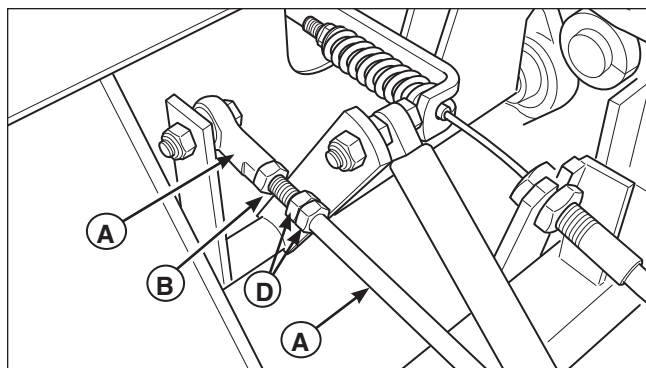

*Figure 34. Neutral Adjustment (RH side shown)*

*A. Adjustment Linkage Rod*

*B. Jam Nut*

*C. Ball Joint*

*D. Locking Nuts*

## Return to Neutral Adjustment

To determine if it is necessary to adjust the neutral return, perform the following steps:

1. Disengage the PTO, engage the parking brake and turn off the engine.
2. Move the ground speed control levers into the operating position, pull the levers rearward and release.
3. Move the ground speed control levers out towards the neutral position. If the levers do not align with the notches in the neutral lock plate, it is necessary to adjust the neutral return rod.

### Adjustment - Kawasaki Models

1. Lock the ground speed control lever in the neutral position.
2. Measure the length of the neutral return spring (C, **Figure 35**) it should be set at 3.25" (8.23 cm). If the spring does not measure 3.25" (8.23 cm) loosen the front set collar (D) and the rear set collar (A), then move the front set collar forward or back on the neutral return rod (B) until the spring length equals 3.25" (8.23 cm). Retighten the front set collar.
3. Make sure that the neutral return bushing (E) is seated correctly in the spring stop plate (F).
4. Position the rear set collar so that it sets tightly against the neutral return bushing and tighten.
5. Pull the ground speed control lever rearward and release to check the return to neutral adjustment again. Adjust as necessary to align the ground speed control levers with the notches in the neutral lock plate.

It is important to note that after every adjustment of the neutral return spring, the lever must be returned to the locked position to properly check the neutral position.

### Adjustment - Briggs & Stratton Models

1. Loosen the set collar (D) locked against the return spring (C).
2. Lock the ground speed control levers in neutral.
3. Tighten the set collar snug against the return spring.
4. Pull lever rearward and release to check that the lever stops aligned with the notch in the neutral lock plate.

It is important to note that after every adjustment of the neutral return spring, the lever must be returned to the locked position to properly check the neutral position.

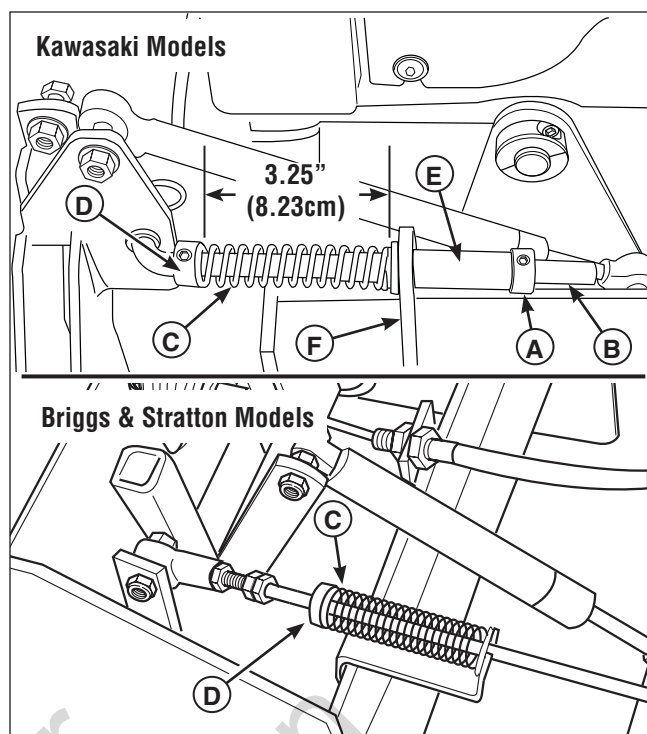


Figure 35. Neutral Return Spring Adjustment

- A. Rear Set Collar
- B. Neutral Return Rod
- C. Neutral Return Spring
- D. Front Set Collar
- E. Neutral Return Bushing
- F. Spring Stop Plate

### Parking Brake Adjustment

1. Disengage the PTO, engage the parking brake, stop the engine and remove the ignition key.
2. Raise the seat plate.
3. Locate the brake spring (**A**, **Figure 36**).
4. With the parking brake engaged, measure the compressed spring length. The spring should be 1-15/16" - 2" (4,9 - 5,1 cm) when compressed.
5. If the spring is not within this range, release the parking brake and turn the adjustment nut (**B**) to compress or relax the spring.
6. Engage the parking brake and re-measure the spring

#### NOTICE

Do NOT adjust the spring shorter than 1-15/16" (4,9 cm) when compressed. This may damage the brake mechanism.

If this adjustment does not correct the braking problem, see your dealer.

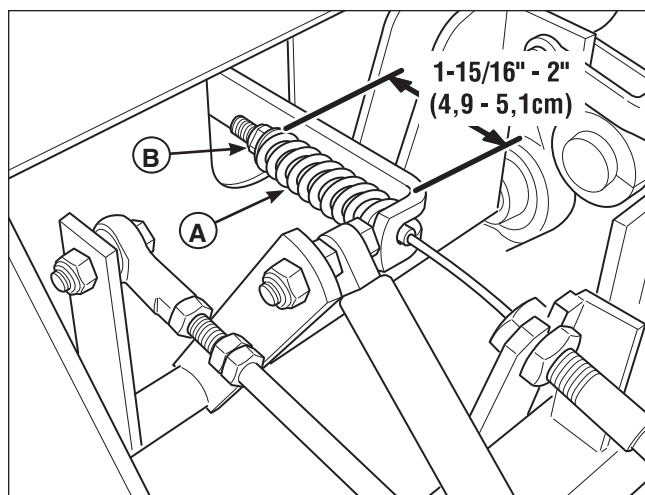


Figure 36. Parking Brake Adjustment

- A. Brake Spring
- B. Adjustment Nut

### Hydraulic Pump Drive Belt Replacement

1. Park the rider on a smooth, level surface such as a concrete floor. Disengage the PTO, engage the parking brake, turn off the engine, and remove the ignition key.
2. Remove the PTO drive belt (see *Mower Belt Replacement* for removal instructions).
3. Remove the hardware that secures the clutch anchor pad to the PTO clutch.
4. Loosen the nut towards the front of the machine on the spring anchor hook (**G**, **Figure 37**) to release the majority of the belt tension. Use caution and remove the nut to completely release the tension.
5. Remove the old belts and replace it with the new ones. Make sure the V-side of the belt runs in the grooves of the crankshaft pulley and pump pulleys (**B & C**).
6. Reinstall the anchor hook (**G**) into the anchor tab and loosely fasten the nut. Adjust the anchor hook until a measurement of 8-3/8" (21,2 cm) is achieved from the outside of the spring hooks. Tighten nut.
7. Reinstall the clutch anchor pad to the PTO clutch and secure with the hardware previously removed.
8. Reinstall the PTO drive belt.

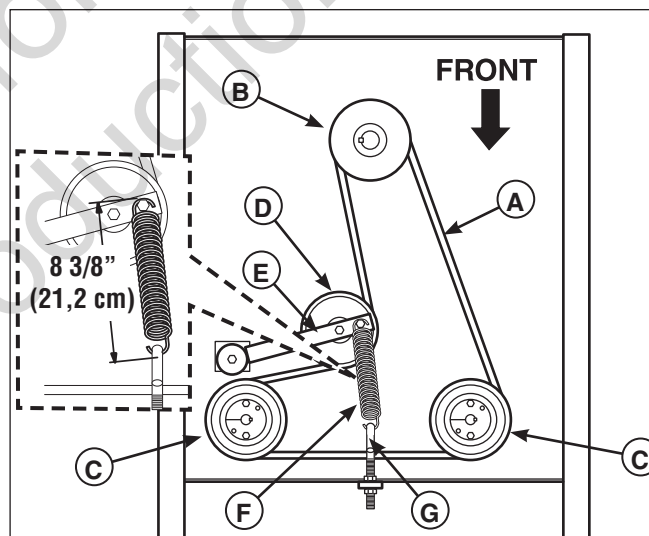


Figure 37. Hydraulic Pump Drive Belt Replacement

- A. Pump Drive Belt
- B. Crankshaft Pulley
- C. Pump Pulley
- D. Idler Pulley
- E. Idler Arm
- F. Spring
- G. Spring Anchor Hook



## Rear Suspension Adjustment

The shock assembly can be adjusted in two ways to allow the operator to customize the ride according to the operator's weight and/or operating conditions. You have the option of adjusting the spring pre-load and/or upper mounting position.

Items to consider before adjusting the suspension:

- Less spring pre-load should be used with light weight operators, which will provide a softer, more cushioned ride.
- More spring pre-load or upper mounting position #2 should be used with heavy weight operators, or when a rear-mount grass bagger system is installed, which will provide a stiffer, more rigid ride.

### To adjust the spring pre-load:

1. Park the machine on a flat, level surface. Disengage the PTO, stop the engine and engage the parking brake.
2. Raise the rear of the machine and secure with jack stands. Chock the front wheels to prevent the machine from rolling.
3. Remove the rear drive tires.
4. See Figure 38. Using the supplied spanner wrench (P/N: 5022853), insert the tip of the wrench into the notch in the pre-load adjuster. While holding the wrench in place with both hands:
  - Turn **counter-clockwise** to increase the pre-load;
  - Turn **clockwise** to decrease the spring pre-load.

Make sure both shocks are set to the same amount of pre-load.

5. Reinstall the rear drive tires. Torque the lug bolts to 85-95 ft/lbs (115-129 Nm). Remove the jack stands from under the machine.

**NOTE:** Spanner wrench is located under the seat on the right-hand side of the machine.

### To adjust the upper mounting position:

1. Park machine on a flat, level surface. Disengage the PTO, stop the engine and engage the parking brake.
2. Raise the rear of the machine and secure with jack stands. The jack stands must be under the bumper. Chock the front wheels to prevent the machine from rolling.
3. Position the jack under the cross member that ties the suspension arms together and slowly raise the rear suspension to relieve the pressure on the upper shock mounting bolts.

**NOTE:** This will require small adjustments to the jack's position. The shock should move freely on the mounting bolt when the pressure is relieved.

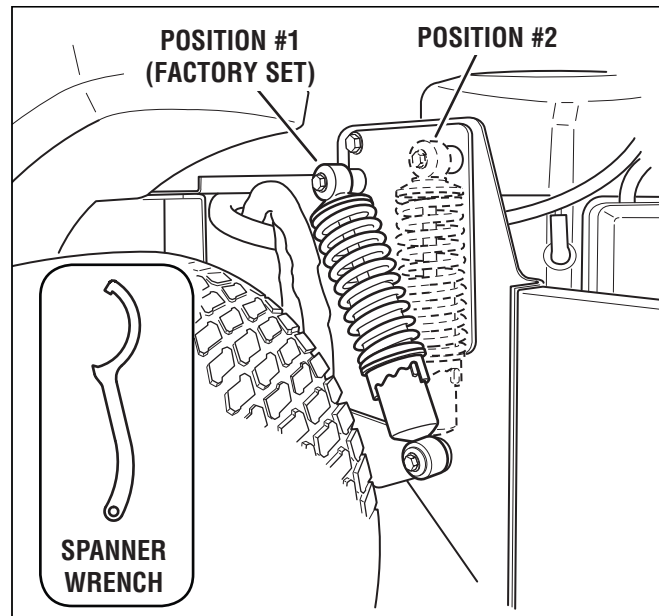


Figure 38. Suspension Adjustment

<b>⚠ WARNING</b>	
	<b>Spring loaded components can kick back causing injury.</b>
Use two hands when adjusting the shock assemblies. This will prevent the wrench from slipping while pressure is being applied.	

4. Remove the upper shock mounting hardware and pivot the shock to position #2 (see Figure 38). Adjust the jack to align the shock mounts to the shocks.
5. Reinstall the upper shock mounting hardware and tighten securely.
6. Remove the jack from under the suspension cross member.
7. Remove the jack stands from under the machine.

### Mower Deck Adjustment - 52" Mower Decks

#### Adjusting the Deck Lift Rod Timing

1. Park the machine on a flat, level surface. Disengage the PTO, stop the engine and engage the parking brake. Rear tires must be inflated to 15 psi (1,03 bar); front tires to 25 psi (1,72 bar).
2. To check the deck lift rod timing, measure and record the distance between the lift pivots and the rod pivots. Repeat for other side of unit. See Figure 39.
3. If the measurements are equal, skip to Step 5. If the measurements are NOT equal (greater than 1/8" (3,17 mm) difference), adjustment is required, continue with Step 4.
4. Refer to Figure 40. To adjust the lift rod timing, adjust the 5/8" hex nuts on either side of the front lift pivot until the measurements are equal. Repeat for other side.

#### Adjusting the Leveling of the Mower Deck

1. Place the deck height adjustment pin in the 4" (10,2 cm) position.
2. Place the 2 X 4 blocks under each corner of the mower deck with the 3-1/2" sides being vertical. See Figure 41.
3. Adjust the front eyebolts until the chains are tight and the deck is still resting on the 2 X 4's. Tighten jam nuts. See Figure 42.
4. Loosen the nuts and allow the rear of the deck to rest on the 2 X 4's. Slide the chains in the slots until the chains are tight and tighten the nuts. See Figure 42.
5. Remove all 2 X 4 blocks from under the mower deck.

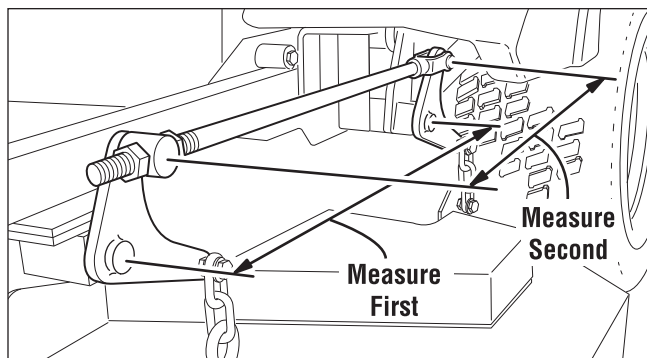


Figure 39. Measure the Inner & Outer Lift Rods

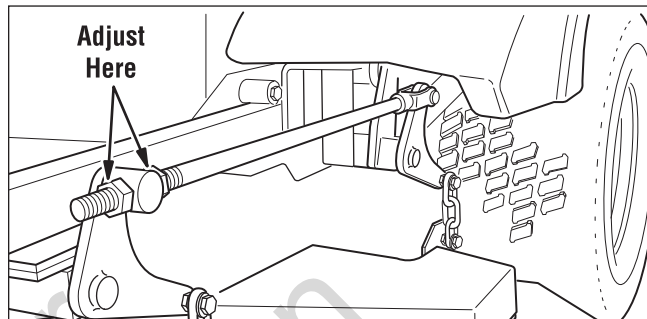


Figure 40. Adjust Lift Rod Timing

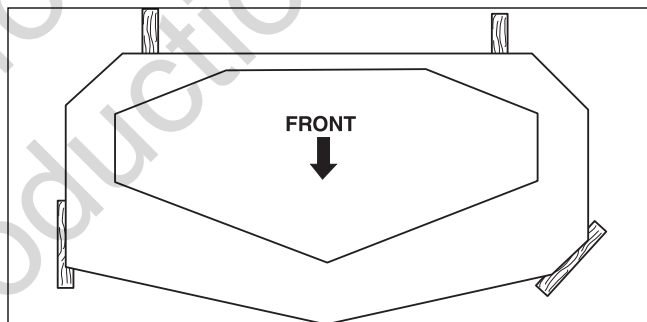


Figure 41. 2 X 4 Locations

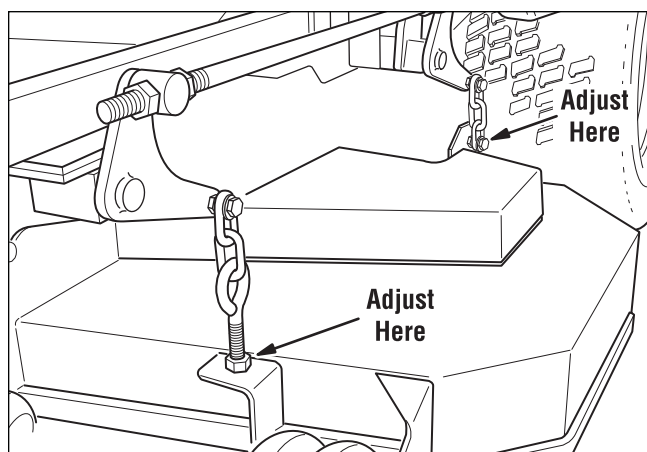


Figure 42. Hanger Chain Adjustment

## Mower Deck Adjustment - 61" Mower Decks

### Adjusting the Deck Lift Rod Timing

1. Park the machine on a flat, level surface. Disengage the PTO, stop the engine and engage the parking brake. Rear tires must be inflated to 15 psi (1,03 bar); front tires to 25 psi (1,72 bar).
2. To check the deck lift rod timing, measure and record the distance between the lift pivots and the rod pivots. Repeat for other side of unit. See Figure 43.
3. If the measurements are equal, skip to *Adjusting the Leveling of the Mower Deck*. If the measurements are not equal (greater than 1/8" (3,17 mm) difference), adjustment is required. Continue with Step 4.
4. Lock the deck lift pedal in the 5" (12,7 cm) position. Remove the cutting height adjustment pin and lower the mower deck.
5. To ensure that the deck is in the lowest position, push the pedal by hand towards the rear of the unit and install the height adjustment pin in the 3" (7,6 cm) position to hold in place. See Figure 44.
6. Block up the mower deck until all hanger chains are slack. See Figure 45.
7. Refer to Figure 46. To adjust the deck lift rod, loosen the jam nut on the front ball joint then remove the 1/2" hardware fastening the ball joint to the lift pivot arm. Turn the ball joint clockwise to shorten the distance between the rod pivots or counter-clockwise to lengthen the distance between the rod pivots. Reinstall the ball joint on the lift pivot arm and secure with the 1/2" hardware previously removed. Tighten the jam nut against the lift rod.
8. Remove the blocks from under the mower deck.
9. Remove the cutting height adjustment pin from in front of the deck lift pedal arm. Lift mower deck and reinstall adjustment pin in desired mowing height.

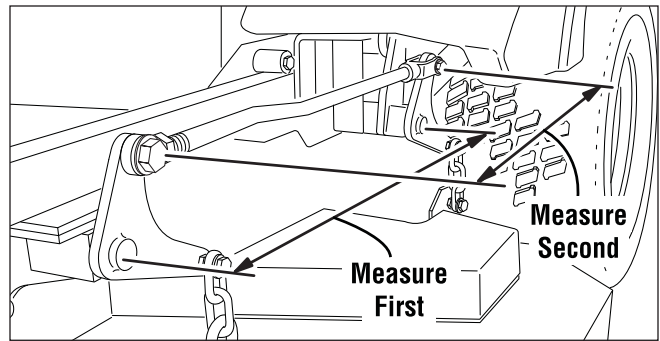


Figure 43. Check Deck Lift Rod Timing

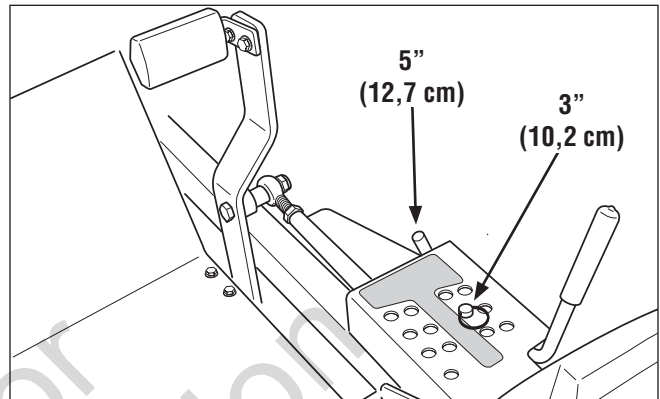


Figure 44. Deck Lift Pedal & Pin Position

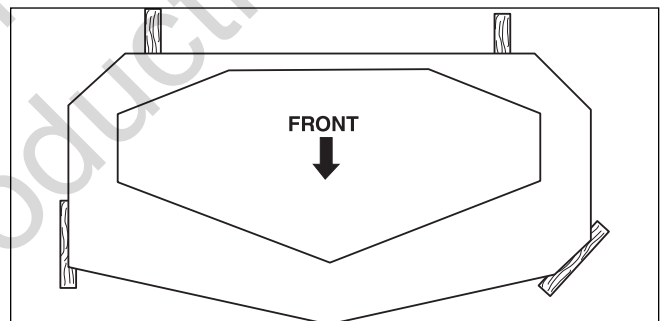


Figure 45. 2 X 4 Locations

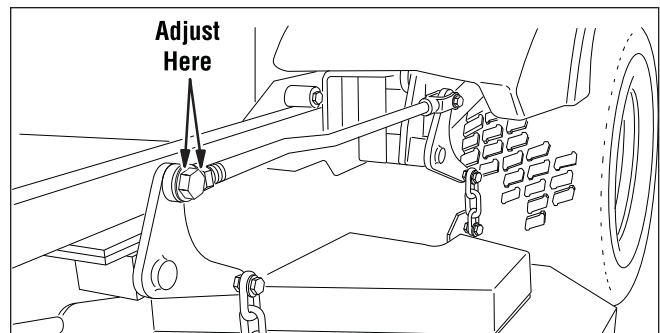


Figure 46. Adjust Deck Lift Rod Timing

### Adjusting the Leveling of the Mower Deck

*Note: Before attempting to level the mower deck, the deck lift rod timing must be checked and/or adjusted.*

1. Park machine on a flat, level surface. Disengage the PTO, stop the engine and engage the parking brake. Rear tires must be inflated to 15 psi (1,03 bar); front tires to 25 psi (1,72 bar).
2. Lock the deck lift pedal in the 5" (12,7 cm) position. Place the deck height adjustment pin in the 4" position and lower the deck lift pedal until the arm contacts the pin.
3. Place 2 X 4 blocks under each corner of the mower deck with the 3-1/2" sides being vertical. See Figure 47.
4. Adjust the front eyebolts until the chains are tight and the deck is still resting on the 2 X 4's. Tighten the jam nuts. See Figure 48.
5. Loosen the nuts and allow the rear of the deck to rest on the 2 X 4's. Slide the chains down in the slots until the chains are tighten and tighten the nuts. See Figure 48.
6. Remove all 2 X 4 blocks from under the mower deck.

### Deck Lift Spring

The deck lift springs (**A**, **Figure 49**) are factory set to provide optimal lifting performance.

Although it is fastened with a multi-positional anchor, this is NOT an adjustment point.

Do NOT attempt to adjust the spring length or lifting performance will be compromised.

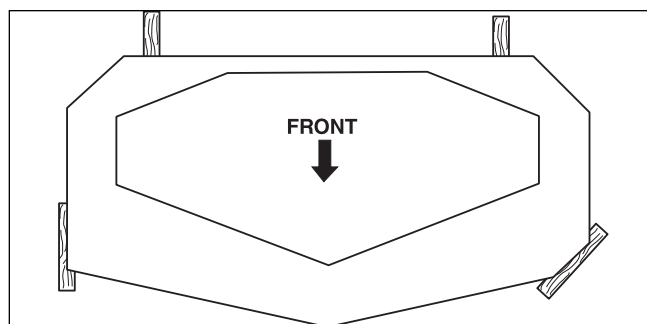


Figure 47. 2 X 4 Locations

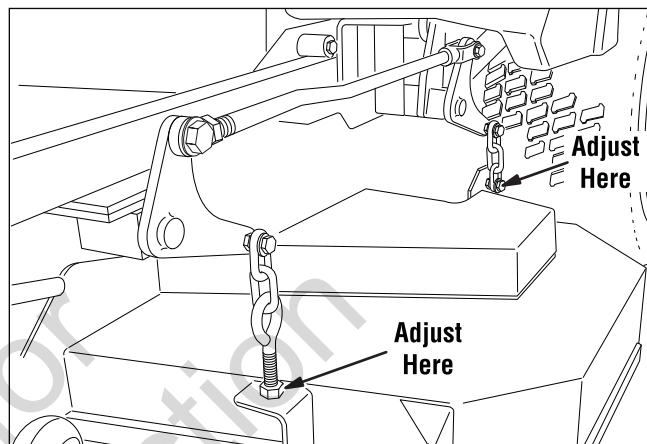


Figure 48. Adjust the Mower Deck Leveling

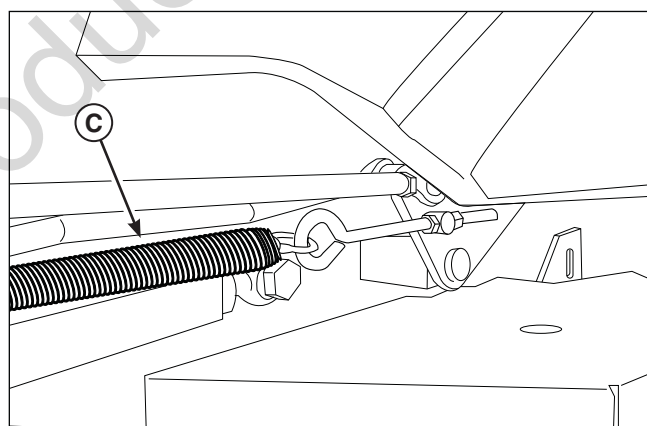


Figure 49. Deck Lift Spring Location  
A. Deck Lift Spring

## Mower Belt Replacement

**NOTICE**

To avoid damaging belts, do NOT pry belts over pulleys.

1. Park the rider on a smooth, level surface such as a concrete floor. Disengage the PTO, engage the parking brake, turn off the engine, and remove the ignition key.
2. Lower the mower deck to its lowest cutting position and remove the mower deck guards.

**⚠ WARNING**

**Spring loaded components can kick back causing injury.**

Use extreme caution when rotating the idler arm with the breaker bar, due to the increased tension in the spring as the idler arm is being rotated. Injury may result in the breaker bar is prematurely release while the spring is under tension.

3. Using a 1/2" breaker bar, place the square end in the square hole located in the end of the idler arm (A, Figure 50).
  - **52" Mower Decks:** Carefully rotate the breaker bar **clockwise**, which will relieve the tension on the belt exerted from the idler arm.
  - **61" Mower Decks:** Carefully rotate the breaker bar **counter-clockwise**, which will relieve the tension on the belt exerted from the idler arm.
4. Slide the drive belt over the edge of the stationary idler pulley (B). Carefully release the tension on the breaker bar.
5. Remove the old belt and replace with a new one. Make sure the V-side of the belt runs in the pulley grooves (Figure 51).
6. Install the drive belt on the PTO pulley, the spindle pulleys and all idler pulleys except the stationary pulley (B, Figure 51).
  - **52" Mower Decks:** Carefully rotate the breaker bar **clockwise** and install the belt on the stationary idler pulley (B). Carefully release the tension on the breaker bar.
  - **61" Mower Decks:** Carefully rotate the breaker bar **counter-clockwise** and install the belt on the stationary idler pulley (B). Carefully release the tension on the breaker bar.
7. Reinstall the mower deck guards.
8. Run the mower under no-load condition for about 5 minutes to break-in the new belt.

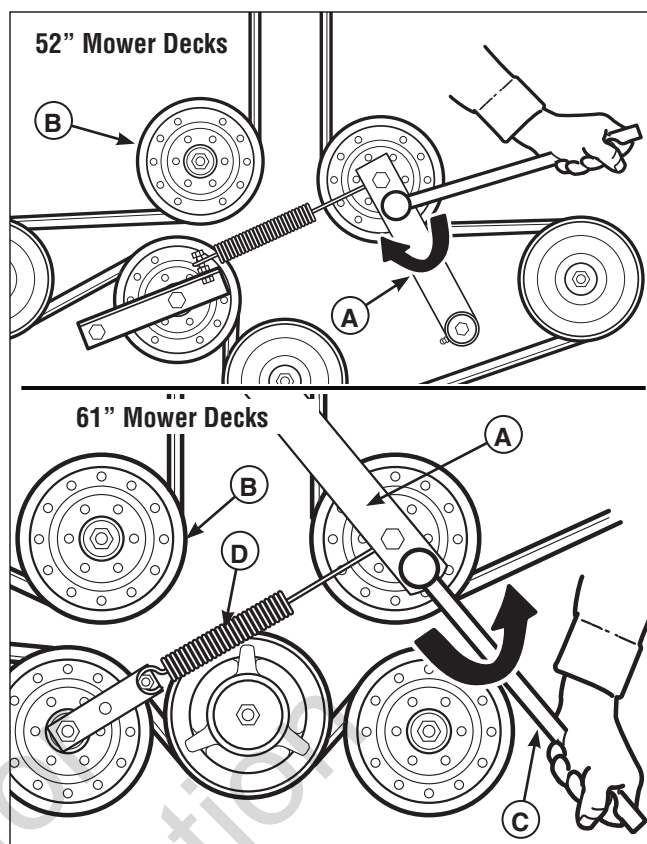


Figure 50. Mower PTO Belt

A. Idler Arm

B. Stationary Idler Pulley

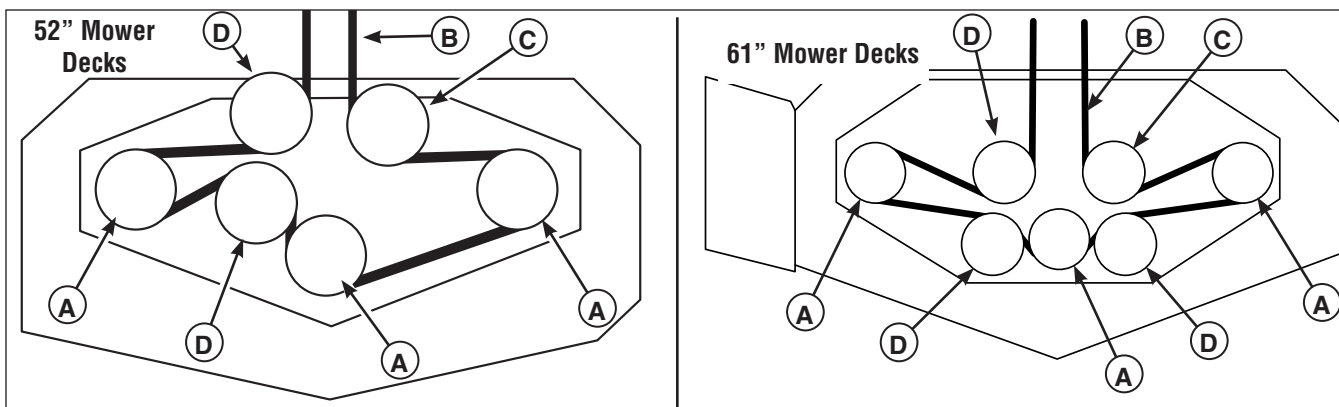


Figure 51. Mower PTO Belt Routing

- A. Spindle Pulley
- B. PTO Drive Belt
- C. Spring-loaded Idler Pulley
- D. Stationary Idler Pulley

## Check the Mower Belt Idler Tensioner Spring Length

1. Park the machine on a smooth level surface such as a concrete floor. Disengage the PTO, engage the parking brake, turn off the engine and remove the ignition key.
2. Lower the mower deck to its lowest cutting position.
3. Measure the coil length of the mower belt tension spring (A, Figure 49). The measurement the measurement as designated in the chart. If the measurement does not equal the measurement as designated in the chart, adjust the mower belt idler spring length (E).

## Adjusting the Mower Belt Idler Spring Length

1. Loosen the jam nut (C, Figure 49) from the back of the anchor eyebolt (B).
2. Turn the adjustment nut (D) until the measurement as designated in the chart, is achieved.
3. Retighten the jam nut.

Mower Belt Idler Spring Length		
	Measurement	
	inch	cm
52" Deck	6-1/2	16.5
Briggs & Stratton Cyclonic Engine w/61" Deck		
Briggs & Stratton Vanguard Engine w/61" Deck	6-1/8	15.6

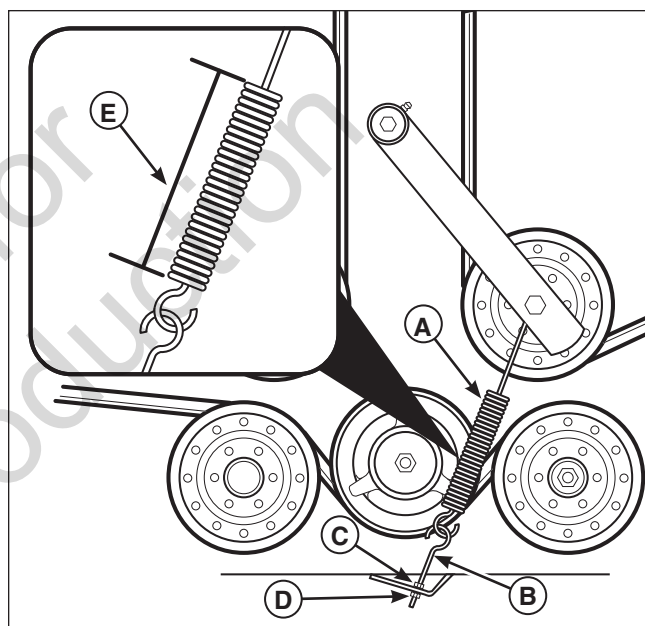


Figure 49. Mower Belt Idler Spring Length



## Troubleshooting

While normal care and regular maintenance will extend the life of your equipment, prolonged or constant use may eventually require that service be performed to allow it to continue operating properly.

The troubleshooting guide below lists the most common problems, their causes and remedies.

See the information on the following pages for instructions on how to perform most of these minor adjustments and service repairs yourself. If you prefer, all of these procedures can be performed for you by your local authorized dealer.

### ⚠ WARNING



**Remove the ignition key prior to performing maintenance on the unit.**

- To avoid serious injury, perform maintenance on the machine only when the engine is stopped and the parking brake is engaged.
- Always remove the ignition key, disconnect the spark plug wire and fasten it away from the spark plug before beginning the maintenance, to prevent accidental starting of the engine.

## Troubleshooting the Rider

PROBLEM	CAUSE	REMEDY
<b>Engine will not turnover or start.</b>	1. Parking brake not engaged.	1. Engage parking brake.
	2. PTO (electric clutch) switch in ON position.	2. Place if OFF position.
	3. Out of fuel	3. If engine is hot allow to cool, the refill the fuel tank.
	4. Engine flooded.	4. Move choke control to CLOSED position.
	5. Fuse blown.	5. Replace fuse.
	6. Battery terminals require cleaning.	6. Clean the battery terminals.
	7. Battery discharged or dead.	7. Recharge or replace.
	8. Wiring loose or broken.	8. Visually check wiring & replace broken or frayed wires. Tighten loose connections.
	9. Solenoid or starter motor faulty.	9. Repair or replace. See authorized dealer.
	10. Safety interlock switch faulty.	10. Replace as needed. See authorized service dealer.
	11. Spark plug(s) faulty, fouled or incorrectly gapped.	11. Clean and gap or replace. See engine manual.
	12. Water in fuel.	12. Drain fuel & replace with fresh fuel.
	13. Gas is old or stale.	13. Drain fuel & replace with fresh fuel.
<b>Engine starts hard or runs poorly.</b>	1. Fuel mixture too rich.	1. Clean air filter. Check choke adjustment.
	2. Spark plug(s) faulty, fouled, or incorrectly gapped.	2. Clean and gap or replace. See engine manual.
<b>Engine knocks</b>	1. Low oil level.	1. Check/add oil as required.
	2. Using wrong grade engine oil.	2. See engine manual.
<b>Excessive oil consumption</b>	1. Engine running too hot.	1. Clean engine fins, blower screen and air cleaner.
	2. Using wrong weight oil.	2. See engine manual.
	3. Too much oil in crankcase.	3. Drain excess oil.
<b>Engine exhaust is black.</b>	1. Dirty air filter.	1. Replace air filter. See engine manual.
	2. Engine choke control is in CLOSED position.	2. Open choke control.

## *Troubleshooting the Rider continued*

PROBLEM	CAUSE	REMEDY
Engine runs, but rider will not drive.	<ol style="list-style-type: none"> <li>1. Hydraulic release valve(s) in "open" position.</li> <li>2. Belt is broken.</li> <li>3. Drive belt slips.</li> <li>4. Brake is not fully released.</li> </ol>	<ol style="list-style-type: none"> <li>1. Turn hydraulic release valve(s) CLOCKWISE to close.</li> <li>2. See Drive Belt Replacement.</li> <li>3. See Problem and Cause below.</li> <li>4. See authorized service dealer.</li> </ol>
Rider drive belt slips.	<ol style="list-style-type: none"> <li>1. Pulleys or belt greasy or oily.</li> <li>2. Tension too loose.</li> <li>3. Belt stretched or worn.</li> </ol>	<ol style="list-style-type: none"> <li>1. Clean as required.</li> <li>2. Adjust spring tension. See Drive Belt Replacement.</li> <li>3. Replace belt.</li> </ol>
Brake will not hold.	<ol style="list-style-type: none"> <li>1. Brake is incorrectly adjusted.</li> <li>2. Brake pads worn.</li> </ol>	<ol style="list-style-type: none"> <li>1. See Brake Adjustment.</li> <li>2. Replace with new brake pads.</li> </ol>
Rider steers or handles poorly.	<ol style="list-style-type: none"> <li>1. Steering linkage is loose.</li> <li>2. Improper tire inflation.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check and tighten any loose connections.</li> <li>2. See Operation section.</li> </ol>

## Troubleshooting the Mower

PROBLEM	CAUSE	REMEDY
Mower will not raise.	<ol style="list-style-type: none"> <li>1. Lift linkage not properly attached or damaged.</li> </ol>	<ol style="list-style-type: none"> <li>1. See authorized service dealer for repair.</li> </ol>
Engine stalls easily with mower engaged.	<ol style="list-style-type: none"> <li>1. Engine speed too slow.</li> <li>2. Ground speed too fast.</li> <li>3. Cutting height set too low.</li> <li>4. Discharge chute jamming with cut grass.</li> </ol>	<ol style="list-style-type: none"> <li>1. Set to full throttle.</li> <li>2. Decrease ground speed.</li> <li>3. Cut tall grass at maximum cutting height during first pass.</li> <li>4. Cut grass with discharge pointing towards previously cut grass.</li> </ol>
Excessive mower vibration.	<ol style="list-style-type: none"> <li>1. Blade mounting bolts are loose.</li> <li>2. Mower blades, arbors or pulleys are bent.</li> <li>3. Mower blades are out of balance.</li> <li>4. Belt installed incorrectly.</li> </ol>	<ol style="list-style-type: none"> <li>1. Tighten to 70 ft.lbs (94 Nm)</li> <li>2. Check and replace as necessary.</li> <li>3. Remove, sharpen and balance blades. See Maintenance section.</li> <li>4. Reinstall correctly.</li> </ol>
Excessive belt wear or breakage.	<ol style="list-style-type: none"> <li>1. Bent or rough pulleys.</li> <li>2. Using incorrect belt.</li> </ol>	<ol style="list-style-type: none"> <li>1. Repair or replace.</li> <li>2. Replace with correct belt.</li> </ol>
Mower drive belt slips or fails to drive.	<ol style="list-style-type: none"> <li>1. Idler pulley spring broken or not properly attached.</li> <li>2. Mower drive belt broken.</li> </ol>	<ol style="list-style-type: none"> <li>1. Repair or replace as needed.</li> <li>2. Replace drive belt.</li> </ol>
Mower does not engage.	<ol style="list-style-type: none"> <li>1. Electrical wiring damage.</li> <li>2. Battery voltage too low.</li> </ol>	<ol style="list-style-type: none"> <li>1. Locate and repair damaged wire.</li> <li>2. Recharge battery and check alternator. See Battery Maintenance section.</li> </ol>


## Troubleshooting Common Cutting Problems

### PROBLEM

### CAUSE

### REMEDY


#### Streaking



1. Blades are not sharp.
2. Blades are worn down too far.
3. Engine speed is too slow.
4. Ground speed is too fast.
5. Deck is plugged with grass.
6. Not overlapping cutting rows enough.
7. Not overlapping enough when turning.

1. Sharpen your blades.
2. Replace your blades.
3. Always mow at FULL throttle.
4. Slow down.
5. Clean out the mower.
6. Overlap your cutting rows.
7. When turning your effective cutting width decreases—overlap more when turning.


#### Scalping



1. Lawn is uneven or bumpy.
2. Mower deck cutting height is set too low.
3. Ground speed is too fast.
4. Deck is not levelled correctly.
5. Tire pressure is low or uneven.

1. Roll or level the lawn.
2. Raise the cutting height.
3. Slow down.
4. Correctly level the deck.
5. Check and inflate the tires.


#### Stepped Cutting.



1. Deck is not leveled correctly.
2. Tires are not properly inflated.
3. Blades are damaged.
4. Deck shell is damaged.
5. Mower spindle is bent or loose.
6. Blades are installed incorrectly.

1. Level the deck correctly.
2. Check and inflate the tires.
3. Replace the blades.
4. Repair or replace the deck.
5. Repair or replace the spindle.
6. Reinstall the blades correctly.


#### Uneven Cutting



1. Deck is not leveled correctly.
2. Blades are dull or worn.
3. Blades are damaged.
4. Deck is clogged with grass clippings.
5. Deck shell is damaged.
6. Mower spindle is bent or loose.
7. Blades are installed incorrectly.
8. Tires are not properly inflated.

1. Level the deck correctly.
2. Sharpen or replace the blades.
3. Replace the blades.
4. Clean out the deck.
5. Repair or replace the deck.
6. Repair or replace the spindle.
7. Reinstall the blades correctly.
8. Check and inflate the tires.

#### Stingers



1. Blades are not sharp or nicked.
2. Blades are worn down too far.
3. Engine speed is too low.
4. Ground speed is too fast.
5. Deck is plugged with grass.

1. Sharpen your blades.
2. Replace your blades.
3. Always mow at full throttle.
4. Slow down.
5. Clean out the mower.

## Specifications

NOTE: Specifications are correct at time of printing and are subject to change without notice.

### ENGINE

#### 23HP\* Kawasaki

(Product Model: 5900523)

<b>Make</b>	Kawasaki
<b>Model</b>	FS691V-ES00-S
<b>Horsepower</b>	23 @ 3600
<b>Displacement</b>	44.3 Cu. In (726 cc)
<b>Electrical System</b>	12 volt, 15 amp charging coil; Battery: 340 cca
<b>Oil Capacity</b>	2.2 US qt (2.1 L) w/ filter

#### 25HP\* Kawasaki

(Product Model: 5900820)

<b>Make</b>	Kawasaki
<b>Model</b>	FH721V
<b>Horsepower</b>	25 @ 3600
<b>Displacement</b>	41.2 Cu. in (675 cc)
<b>Electrical System</b>	12 volt, 15 amp. alternator Battery: 340 CCA
<b>Oil Capacity</b>	2.0 US qt (1.9 L) w/ filter

#### 26HP\* Kawasaki

(Product Model: 5900954)

<b>Make</b>	Kawasaki
<b>Model</b>	FX730V
<b>Horsepower</b>	26 @ 3600 rpm
<b>Displacement</b>	44.3 Cu. in (726 cc)
<b>Electrical System</b>	12 volt, 15 amp. alternator Battery: 340 CCA
<b>Oil Capacity</b>	2.0 US qt (2.1 L) w/ filter

#### 26HP\*\* Briggs & Stratton Cyclonic

(Product Model: 5900522)

<b>Make</b>	Briggs & Stratton
<b>Model</b>	44P977-0111-G5
<b>Horsepower</b>	26 @ 3600
<b>Displacement</b>	44.2 Cu. In (724 cc)
<b>Electrical System</b>	12 volt, 16 alternator; Battery: 340 cca
<b>Oil Capacity</b>	2.0 US qt (1.9 L) w/ filter

#### 28HP\*\* Briggs & Stratton Vanguard

(Product Model: 5900821)

<b>Make</b>	Briggs & Stratton
<b>Model</b>	541777-0110-E1
<b>Horsepower</b>	28 @ 3600 rpm
<b>Displacement</b>	54.88 Cu in. (896 cc)
<b>Electrical System</b>	12 volt, 20 amp. Alternator Battery: 340 CCA
<b>Oil Capacity</b>	2.4 US qt (2.25 L) w/ filter

#### 28HP\*\* Briggs & Stratton Cyclonic

(Product Model: 5900524)

<b>Make</b>	Briggs & Stratton
<b>Model</b>	49L977-0125-G5
<b>Horsepower</b>	28 @ 3600
<b>Displacement</b>	49.43 Cu. in (810 cc)
<b>Electrical System</b>	12 volt, 16 amp. Alternator; Battery: 340 cca
<b>Oil Capacity</b>	2.1 US qt. (2.0 L) w/ filter

### CHASSIS

<b>Fuel Tank</b>	Capacity: 6 gallons (22,7 L) total
<b>Rear Wheels</b>	Tire Size: 22 X 11.00 - 10 Inflation Pressure: 15 psi (1.03 bar)
<b>Front Wheels</b>	Tire Size: 13 X 5.00 - 6 Inflation Pressure: 25 psi (1,72 psi)

### TRANSMISSIONS:

25HP Models - All

LH	Wheel Motor: HGM-15C-4026 (5100877) Pump: PJ-3HBQ-FV1F-XXXX (5100670)
RH	Wheel Motor: HGM-15C-4026 (5100877) Pump: PJ-3KBQ-FV1F-XXXX (5100671)

All other Models - S/N: 2014450933 & Below

LH	Wheel Motor: HGM-15E-3138 (5100407) Pump: PJ-3HBQ-FV1F-XXXX (5100670)
RH	Wheel Motor: HGM-15E-3132 (5100410) Pump: PJ-3KBQ-FV1F-XXXX (5100671)

All Other Models - S/N: 2014450934 - 2014516987

LH	Wheel Motor: HGM-15E-3138 (5100407) Pump: PK-3HBQ-FV1F-XXXX (5102174)
RH	Wheel Motor: HGM-15E-3132 (5100410) Pump: PK-3KBQ-FV1F-XXXX (5102175)

All Other Models - S/N: 2014516988 & Above

LH	Wheel Motor: TF0240LS080AAKZ (5102682) Pump: PK-3HBQ-FV1F-XXXX (5102174)
RH	Wheel Motor: TF0240LS081AAKZ (5102681) Pump: PK-3KBQ-FV1F-XXXX (5102175)

<b>Type</b>	Pump and Wheel Motor
<b>Hydraulic Fluid</b>	Mobil 1™ 15W-50 oil OR Castrol Syntec™ 5W-50 oil
<b>Speeds</b>	Forward: 0-10 MPH (0-16.09 km/h)
<b>@ 3400 rpm</b>	Reverse: 0-5 MPH (0-5 km/h)
<b>Continuous Torque Output</b>	222 ft/lbs (301 Nm)

**Maximum Weight on Axle** 750 lbs (340 kg)

## DIMENSIONS

<b>Overall Length</b>	81" (208 cm)
<b>Overall Width</b>	61" (155 cm) - 52" Deck 72" (183 cm) - 61" Deck
<b>Height</b>	70" (178 cm) w/ Roll Bar Up 59" (150 cm) w/ Roll Bar Down
<b>Weight (apx.)</b>	1012 lbs (459 kg) - 52" Deck 1222 lbs (554 kg) - 61" Deck

\* Actual sustained equipment horsepower will likely be lower due to operating limitations and environmental factors.

### \*\*Engine Power Rating Information

The gross power rating for individual gas engine models is labeled in accordance with SAE (Society of Automotive Engineers) code J1940 (Small Engine Power & Torque Rating Procedure), and rating performance has been obtained and corrected in accordance with SAE J1995 (Revision 2002-05). Torque values are derived at 3060 RPM; horsepower values are derived at 3600 RPM. Actual gross engine power will be lower and is affected by, among other things, ambient operating conditions and engine-to-engine variability. Given both the wide array of products on which engines are placed and the variety of environmental issues applicable to operating the equipment, the gas engine will not develop the rated gross power when used in a given piece of power equipment (actual "on-site" or net power). This difference is due to a variety of factors including, but not limited to, accessories (air cleaner, exhaust, charging, cooling, carburetor, fuel pump, etc.), application limitations, ambient operating conditions (temperature, humidity, altitude), and engine-to-engine variability. Due to manufacturing and capacity limitations, Briggs & Stratton may substitute an engine of higher rated power for this Series engine.

## SLOPE IDENTIFICATION GUIDE

### 1 FOLD ALONG APPROPRIATE DOTTED LINE

THIS IS A 15 DEGREE SLOPE

THIS IS A 10 DEGREE SLOPE

ALIGN THIS EDGE WITH A VERTICAL SURFACE  
(TREE, POLE, FENCE POST, BUILDING, ETC)

2

3  
COMPARE THE ANGLE  
OF THE FOLD TO THE  
ANGLE OF THE SLOPE

### INSTRUCTIONS

1. Fold this page along the dotted line indicated above.
2. Align the left edge of this guide with a vertical tree, a power line pole, a fence post, or any vertical structure.
3. Compare the angle of the fold with the angle of the hill.



## Notes

Not for  
Reproduction

Not for  
Reproduction



[www.simplicitymfg.com](http://www.simplicitymfg.com)

Briggs & Stratton Power Products Group, LLC.  
Copyright © 2011 Briggs & Stratton Corporation  
Milwaukee, WI, USA. All rights reserved.

The Simplicity logo is a trademark of Briggs & Stratton  
Corporation Milwaukee, WI, USA.