

Specifications

	PREMIER	PRO	PRO-XL
Engine	DR Power Equipment R225	DR Power Equipment R300	DR Power Equipment R390
Ft-lbs Torque	9.59	13.28	16.96
Starting	Manual or Electric w/ Recoil Backup	Manual or Electric w/ Recoil Backup	Manual or Electric w/ Recoil Backup
RPM	3800	3800	3800
Impeller	Steel, 5 Blades w/Serrated Teeth	Steel, 5 Blades w/Serrated Teeth	Teel, 5 Blades w/Serrated Teeth
Weight	13.2 Lbs	13.2 Lbs	13.2 Lbs
Mount	Keyless Tapered Direct Engine Mount	Keyless Tapered Direct Engine Mount	Keyless Tapered Direct Engine Mount
Vacuum	2038 CFM	2038 CFM	2038 CFM
Suction	66 MPH	66 MPH	66 MPH
Hose	8" ID	8" ID	8" ID
Collector	Clamshell Design	Clamshell Design	Clamshell Design
Volume	32 Cubic Feet, 240 Gallons	44 Cubic Feet, 330 Gallons	44 Cubic Feet, 330 Gallons
Capacity	500 Lbs	800 Lbs	800 Lbs
Fabric Enclosure	1800 Denier Polyester with Bonded PVC Backing	1800 Denier Polyester with Bonded PVC Backing	1800 Denier Polyester with Bonded PVC Backing
Dump Tilt	60°	60°	60°
Cart	Detachable, High Strength PE Cart Bed	Detachable, High Strength PE Cart Bed	Detachable, High Strength PE Cart Bed
Frame	Welded Steel, 2 Piece Modular Design	Welded Steel, 2 Piece Modular Design	Welded Steel, 2 Piece Modular Design
Impeller Housing	Steel Scroll (.12"), Sideplate (.12")	Steel Scroll (.12"), Sideplate (.12")	Steel Scroll (.12"), Sideplate (.12")
Wheels	Pneumatic 5.30/4.50-8 4 Ply w/ Tube	Pneumatic 5.30/4.50-8 4 Ply w/ Tube	Pneumatic 5.30/4.50-8 4 Ply w/ Tube
Quantity	2 (1 Per Side)	4 (2 Per Side)	4 (2 Per Side)
Tire Size	14" Diameter x 4.5" Wide	14" Diameter x 4.5" Wide	14" Diameter x 4.5" Wide
Jack	Optional Accessory	Heavy Duty w/ 4" Wheel (Ships	Heavy Duty w/ 4" Wheel (Ships
Lawn Mower	12 HP Min Flat Terrain otherwise 14 HP	17 HP Min	17 HP Min
Lawn Mower Hitch	Pin Hitch 8" to 15" from the Ground	Pin Hitch 8" to 15" from the Ground	Pin Hitch 8" to 15" from the Ground
Battery (E/S Models)	9Ah, Spade Terminals	9Ah, Spade Terminals	9Ah, Spade Terminals
Dimensions	87.8" L x 40.1" W x 61" H	87.8" L x 49.5" W x 61" H	87.8" L x 49.5" W x 61" H
Weight	342 Lbs M/S, 355 Lbs E/S	411 Lbs M/S, 423 Lbs E/S	425 Lbs M/S, 437 Lbs E/S

Parts supplied in packaging:

- Power Unit
- Cart Bed with Frame
- Axle
- Tube Frame Handle
- Product Package
 - Safety and Operating Instructions Manual
 - Engine Manual
 - Hardware (see figure 3)
- Large Parts Box (see Figure 4)
- Parts in Cart Bed (Figure 2):
 - 2 Wheels (Premier)
 - 4 Wheels (Pro and Pro XL)
 - Inlet Hose Assembly (with Coupling and Clamps)
 - Outlet Duct
 - Flexible Oil Fill Funnel

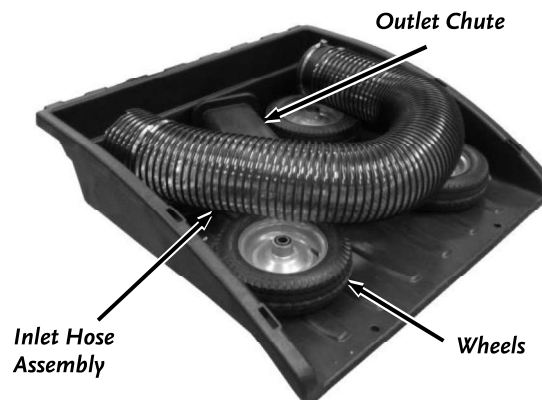


Figure 2