



AIR CONDITIONING



REFRIGERATION



HEATING

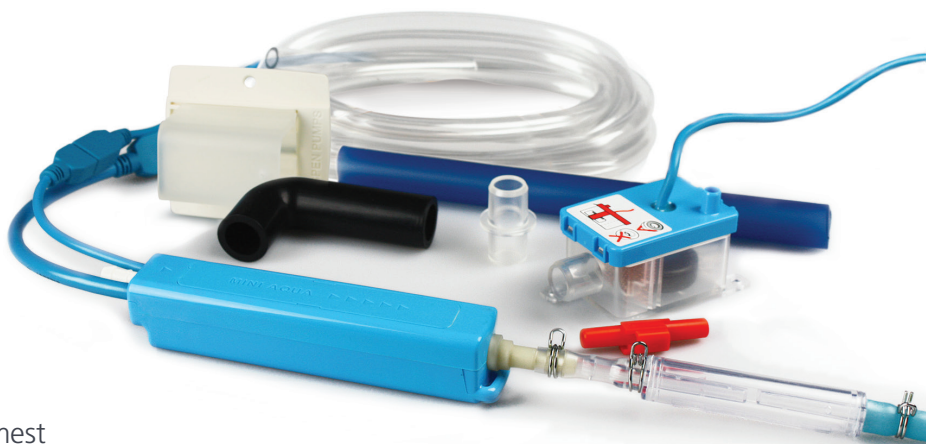


silent⁺

MINI AQUA

CONDENSATE REMOVAL PUMP

Combining Silent⁺ technology and the slimmest mini pump on the market, the Silent⁺ Mini Aqua leads the way in innovation.



12L/h max. flow

10m max. rec. head
(flow rate 6L/h)

19dB(A)

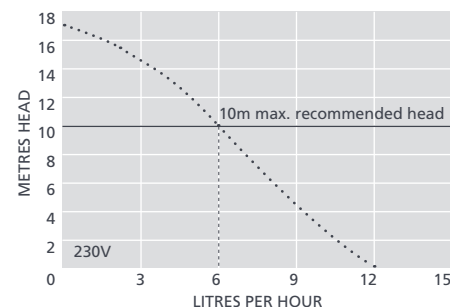
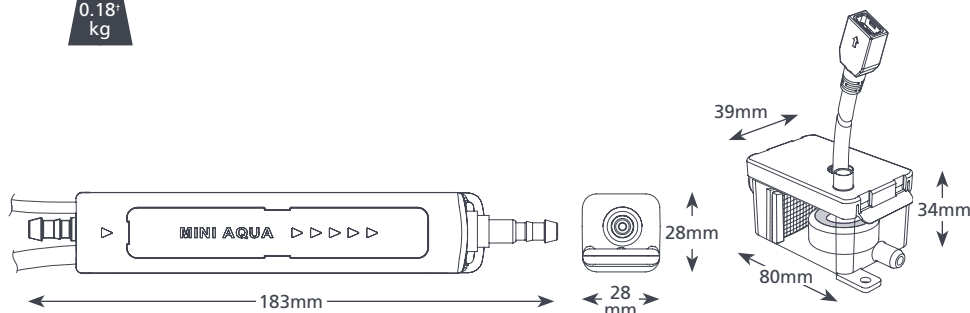
KEY FEATURES

- Quietest in its class
- Acoustic damper
- Plug & play
- Anti siphon device

SUITABILITY

- Up to 16kW / 54,000Btu/h
- Ducted units; Floor standing & Chassis units; High wall mini split systems

✓ **Perfect for...** Small & quiet – you'll never know it's there!

0.18[†]
kg

SILENT⁺ MINI AQUA SPECIFICATIONS

Max. flow	12L/h @ 0 head
Max. rec. head	10m
Max. suction lift	2m
Sound level@1m	19dB(A)
Power supply	230V AC 50-60Hz 0.1A*
Rated	Non continuous
Class	II appliance ☐
Max. unit output	16kW / 54,000Btu/h
Max. water temp	40°C / 104°F
Discharge tube	6mm ID
IP Protection	IPX4
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

SILENT⁺ MINI AQUA OPTIONS

Silent⁺ Mini Aqua FP3326

* Other voltages available
† Pump only

SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 1/4" (6mm)	AX5100
Inline Filter 16mm	FP2640

Xtra For more installation accessories take a look at our Aspen Xtra range

IN THE BOX

Silent⁺ Mini Aqua pump • Reservoir (inc. filter, float, lid) • 1.5m Plug & play power cable • Acoustic damper and 1m aqua discharge tube with connector • Anti vibration bracket • 150mm Vinyl breather tube 6mm ID • Anti siphon device • 1.5m Suction breather tube 6mm ID • 220mm Blue inlet hose 14mm ID • Drain connector kit • Fixing kit • Install manual

Download manual at aspenpumps.com
View install video at aspenpumps.com

Information correct at time of going to press.