GENERAC[®]

GP SERIES Commercial/Residential Portable Generators

GP5500

Features

GP5500

- The Generac OHV engine with splash lubrication provides a long engine life.
- Large-capacity steel fuel tank with incorporated fuel gauge provides durability and extended run times.
- **Low-oil level shutdown** automatically safeguards engine from damage.
- Hardened 1 1/4" steel tube cradle for added durability and strength.
- **Fold-down, locking handle** for sturdy portability and compact storage.
- Hour Meter tracks maintenance intervals.
- Heavy-duty, never flat wheels for reliable portability.
- **Covered outlets** provides added protection from the environment and rugged working conditions.

Models 5939-5 / 5939-6 UPC: 696471059397 (49ST) Model 5975-2 UPC: 696471059755 (49ST/Canada) Model 5945-1 UPC: 696471059458 (California)



AC Rated Output Running Watts 5500 AC Maximum Output Starting Watts 6875

49-State Control Panel (1) 120/240V 30A L14-30R Twist Lock Outlet (2) 20A 1P Circuit Breakers Hour Meter -1 0 -1 0 \cap \square -1 0 -0 0 (2) 25A 1P Circuit Breakers (Models 5939-5, 5939-6 shown) (2) 120V 20A 5-20R Duplex Outlets (1) 25A 2P Circuit Breakers (Models 5939-5, 5939-6, and 5975-2 shown) (Models 5975-2 and 5945-1) (2) 120V 20A GFCI 5-20R Duplex Outlets (Model 5945-1)




specifications


| Product Series | GP5500 | | |
|---|-----------------------|--|--|
| Model (Configuration) | 5939-5 / 5939-6 (EPA) | | |
| | 5975-2 (EPA/CSA) | | |
| | 5945-1 (EPA/CARB) | | |
| AC Rated Output Running Watts: | 5500 | | |
| AC Maximum Output Motor Starting Watts: | 6875 | | |
| AC Voltage | 120/240 VAC | | |
| AC Frequency | 60 Hz | | |
| Rated VAC Amperage | 45.8/22.9 | | |
| Max Rated VAC Amperage | 57.3/28.6 | | |
| Engine Displacement | 389cc | | |
| Engine Type | OHV | | |
| Engine RPM | 3600 | | |
| Recommended Oil | 10W-30 / SAE30 | | |
| Lubrication Method | Splash | | |
| Choke Location | On Engine | | |
| Fuel Shut Off | On Fuel Tank | | |
| Starting Method | Recoil Pull Start | | |
| Low Oil Shutdown Method | Low Level | | |
| Neutral Bonded to Ground | Yes | | |

| Start Switch Type | On/Off Switch | | |
|-------------------------------|---|--|--|
| Switch Location | On Engine | | |
| Fuel Gauge | Built-In Tank | | |
| Fuel Tank Capacity Gal (Ltr) | 7.2 (27.3) | | |
| Run Time at 50% (Hours) | 10 | | |
| | Single Folding / Locking | | |
| Handle Style | Single Folding / Locking | | |
| Handle Style Wheel Type | Single Folding / Locking 9.5" Solid Wheels | | |
| , | <u>_</u> | | |
| Wheel Type | 9.5" Solid Wheels | | |
| Wheel Type Maintenance Kit | 9.5" Solid Wheels Sold Separately | | |

Dimensions and Weights

| | Models 5939-5 / 5939-6 | Model 5975-2 | Model 5945-1 |
|--------------------------|---------------------------|--------------|--------------|
| Length in (mm) | 27.25 (692) | | |
| Width in (mm) | 27 (687) | | |
| Height in (mm) | 25 (638) | | |
| Extended Length in (mm) | 44.5 (1129) | | |
| Carton Length in (mm) | 31 (790) | | |
| Carton Width in (mm) | 21.5 (550) | | |
| Carton Height in (mm) | 23.25 (590) | | |
| Unit Weight Ibs (kg) | 170.9 (81.3) / 171 (77.5) | 170.9 | (81.3) |
| Shipping Weight Ibs (kg) | 193 (87.4) | | |

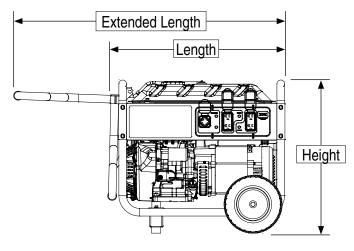





Generac Power Systems, Inc. • P.O. Box 8, Waukesha, WI 53187 • generac.com ©2013 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Bulletin 0196610SBY-B / Printed in U.S.A. 01/15/13