

Job Name:

System Reference:

Date:



Indoor Unit: MSZ-GL18NA-U1



Wireless Remote Controller

SPECIFICATIONS:**Rated Capacity***

Cooling ¹	Btu/h / W	18,000
Heating at 47° F ²	Btu/h / W	21,600

Rating Conditions per AHRI Standard:

¹ Cooling | Indoor: 80° F (27° C)DB / 67° F (19° C)WB; Outdoor: 95° F (35° C)DB / 75° F (24° C)WB² Heating at 47°F | Indoor: 70° F (21° C)DB / 60° F (16° C)WB; Outdoor: 47° F (8° C)DB / 43° F (6° C)WB

For data on specific indoor units (all ducted, all non-ducted, and both ducted and non-ducted) combinations, see the MXZ Technical and Service Manual.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz	
-------------------------------	----------------------------	--

Minimum Circuit Ampacity (MCA)	A	1
--------------------------------	---	---

Blower Motor (ECM)	F.L.A.	0.76
--------------------	--------	------

Blower Motor Output	W	55
---------------------	---	----

Field Drainpipe Size O.D.	In.(mm)	5/8 (15)
---------------------------	---------	----------

Airflow Rate (Quiet - Lo - Med - Hi - Super Hi)

Cooling	DRY	CFM	259-333-416-523-646
	WET		233-300-375-470-581
Heating	DRY		296-384-469-563-646

Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)

Cooling	dB(A)	28-33-38-44-49
Heating		28-33-38-43-48

External Dimensions (H x W x D)	In.(mm)	12 x 36-5/16 x 9-13/16 (305 x 923 x 250)
---------------------------------	---------	---

Net Weight	Lbs.(kg)	28 (13)
------------	----------	---------

External Finish	Munsell 1.0Y 9.2 / 0.2
-----------------	------------------------

Refrigerant Piping (Flared)

Liquid (High Pressure)	In.(mm)	1/4 (6.35)
Gas (Low Pressure)		1/2 (12.7)

ACCESSORIES:**Indoor Unit**

- ☐ Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- ☐ Condensate Pump (Sauermann SI30-115/230; 115/230V)
- ☐ Anti-Allergy Enzyme Filter (MAC-408FT-E)
- ☐ Platinum Catalyst Deodorizing Filter (MAC-308FT-E)
- ☐ Drain Pan Level Sensor (DPLS2)



Controls

- ☐ Wireless Controller (MHK1)
- ☐ Wired Remote Controller PAR-32MAA (Requires MAC-333IF-E)
- ☐ Wireless Interface for kumo cloud™ (PAC-USWHS002-WF-1)
- ☐ Thermostat Interface (PAC-US444CN-1)

DIMENSIONS: MSZ-GL18NA-U1

MSZ-GL18NA-U1

Unit: in. (mm)

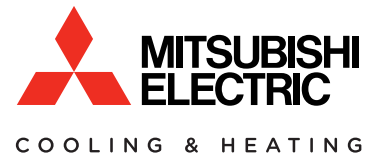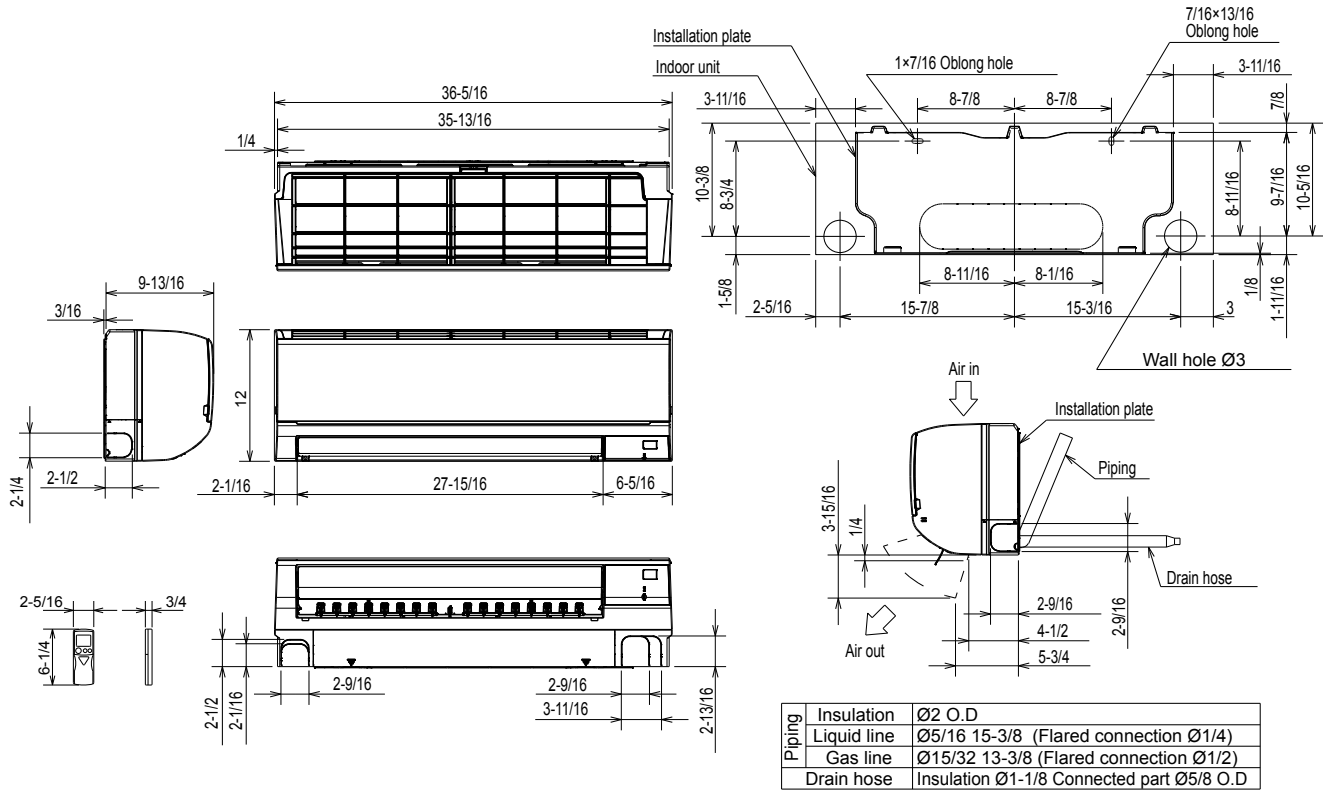

1340 Satellite Boulevard. Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

