

XP10000E



XP SERIES Commercial/Residential Portable Generators


Features

- **Generac's OHVI® Engine** incorporates full pressure lubrication with automotive style spin-on oil filter for longer engine life.
- TruePower™technology provides clean, smooth operation of sensitive electronics, tools, and appliances.
- **Covered Outlets** provide protection from the environment and rugged working conditions.
- Full GFCI Outlet Protection meets OSHA safety requirements.
- Low-Oil Pressure Shutdown safeguards engine from damage.
- **Idle Control** conserves fuel for extended run times and reduced noise.
- Integrated lifting eye for easy transport and security on the job site.
- Full-wrap, heavy-duty frame tubing for durability and strength.
- Large capacity steel fuel tank with incorporated fuel gauge keeps you up and running on the job site.

Model 5932-1 UPC: 696471059328 (EPA/49-ST/CSA)



AC Rated Output Running Watts 10000 AC Maximum Output Starting Watts 12000

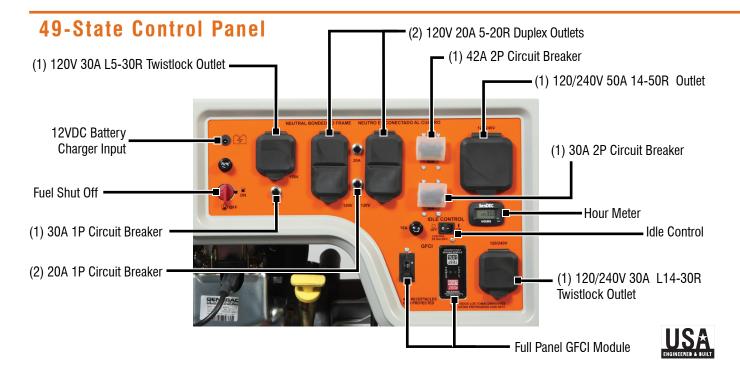

XP10000E

Specifications

	Product Series	XP10000E
	Model (Configuration)	5932-1 (EPA/49-State/CSA)
	AC Rated Output Running Watts	10000
	AC Maximum Output Starting Watts	12000
	Rated AC Voltage	120/240 VAC
	Rated AC Frequency	60 Hz
	Rated 120/240 VAC Amperage	83.3/41.6
	Max 120/240 VAC Amperage	100/50
	Engine Displacement	530cc
	Engine Type	OHVI
	Engine RPM	3600
	Recommended Oil	10W-30/SAE 30
	Lubrication Method	Oil Pump
	Choke Location	On Engine
	Fuel Shut Off	On Control Panel
	Starting Method	Electric
	Battery	Yes
	Battery Type	12VDC
	Battery Wall Charger Adapter	Included
	Low Oil Shutdown	Low Pressure
	Neutral Bonded to Ground	Yes

Start Switch Type	On/Off/Start
Switch Location	On Engine
Fuel Gauge	Built-in Tank
Fuel Tank Capacity Gal (Ltrs)	9.25 (35)
Run Time at 50% (Hours)	9
Handle Style	Folding Interlocked
Wheel Type	10" Semi-Solid Wheels
Maintenance Kit	Included
Warranty- Residential	3 Year
Warranty- Commercial	3 Year

Dimensions and Weights

Length in (mm)	34.75 (883)
Width in (mm)	29 (737)
Height in (mm)	34 (864)
Extended Length in (mm)	48.5 (1232)
Carton Length in (mm)	34.5 (876)
Carton Width in (mm)	23 (584)
Carton Height in (mm)	36.5 (927)
Unit Weight Ibs (kg)	293 (133)
Shipping Weight lbs (kg)	334 (152)

