

XP4000

XP SERIES Commercial/Residential Portable Generators

1 of 2

Features

- **The Generac OHVI® engine** incorporates full pressure lubrication with automotive style spin on oil filter for longer life engine.
- **TruePower™ Technology** provides clean, smooth operation of sensitive electronics, tools, and appliances.
- **Idle Control** reduces noise and conserves fuel for extended run-times.
- **Full panel GFCI protection** meets OSHA safety requirements.
- **Large-capacity steel fuel tank** with incorporated fuel gauge provides durability and extended run times.
- **Low-oil pressure shutdown** automatically safeguards engine from damage.
- **Covered outlets** provides added protection from the environment and rugged working conditions.
- **Full-wrap, heavy-duty, 1 1/4" steel tube cradle** for added durability and strength.
- **User-friendly design** has conveniently placed engine controls for simple operation and east start-up.
- **Hour meter** with maintenance resets tracks usage and monitors maintenance cycles.
- **First oil and maintenance kit included.**


Model 5929-1 UPC: 696471059298
(EPA/49-State/CSA-Canada)

Model 5933-0 UPC: 696471059335
(EPA/CARB-California)



AC Rated Output Running Watts 3600
AC Maximum Output Starting Watts 4500

49-State/CSA/CARB Control Panel

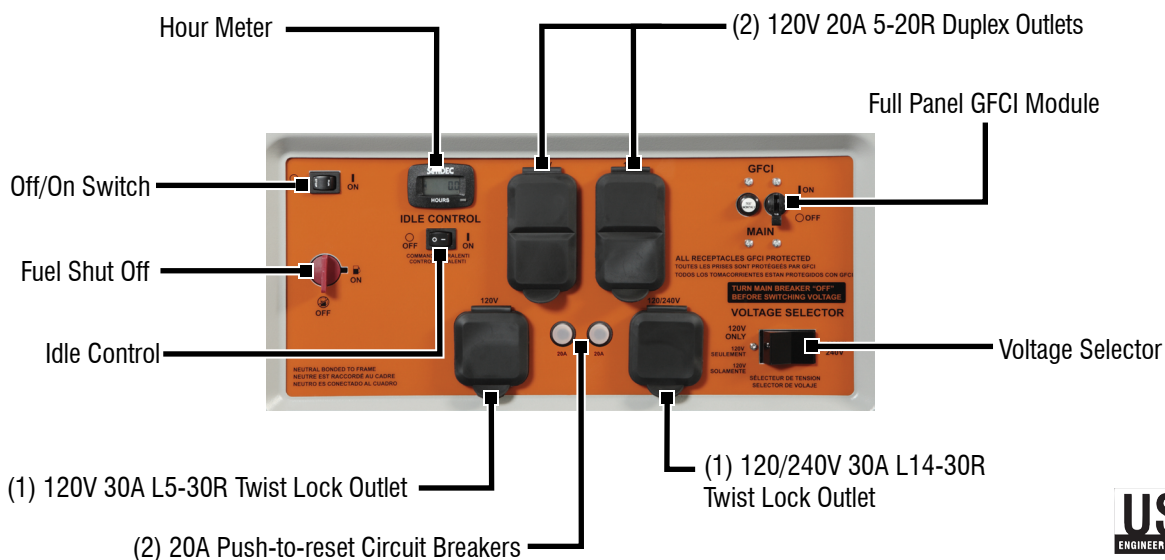

XP4000

Specifications

Product Series	XP4000
Model (Configuration)	5929-1 (EPA/49-State/CSA-Canada) 5933-0 (EPA/CARB-California)
AC Rated Output Running Watts	3600
AC Maximum Output Starting Watts	4500
Rated AC Voltage	120/240 VAC
Rated AC Frequency	60 Hz
Rated 120/240 VAC Amperage	30/15
Max 120/240 VAC Amperage	37.5/18.75
Engine Displacement	216cc
Engine Type	OHVI
Engine RPM	3600
Recommended Oil	10W-30 / SAE 30
Lubrication Method	Oil Pump
Choke Location	On Engine
Fuel Shut Off	On Control Panel
Starting Method	Recoil Pull Start
Low Oil Shutdown	Low Pressure

Neutral Bonded to Ground	Yes
Start Switch Type	Off/On
Switch Location	On Control Panel
Single Point Lifting Eye	Included
Fuel Gauge	Built-in Tank
Fuel Tank Capacity Gal (Ltrs)	4.75 (18)
Run Time at 50% (Hours)	9.5
Maintenance Kit	Included
Warranty- Residential	3 Year
Warranty- Commercial	3 Year



Dimensions and Weights

Length in (mm)	30.5 (775)
Width in (mm)	18.5 (468)
Height in (mm)	23.25 (592)
Carton Length in (mm)	31 (787.4)
Carton Width in (mm)	19.5 (495)
Carton Height in (mm)	24 (609.6)
Unit Weight lbs (kg)	139 (63)
Shipping Weight lbs (kg)	171 (78)

Portability kit sold separately (Model 5965)



Includes all-terrain, never-flat wheels and fold-down, locking handle.

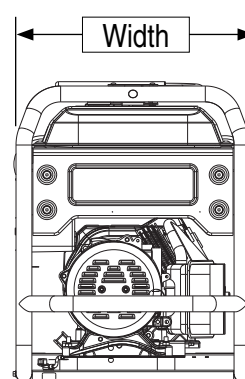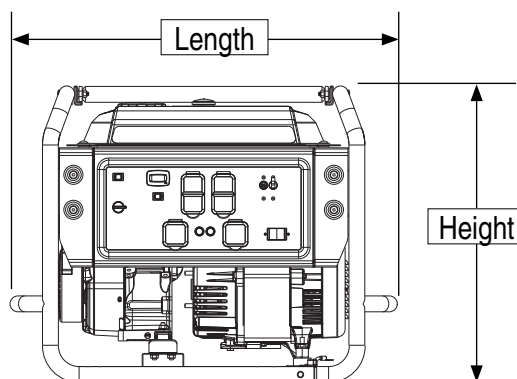

GENERAC

Generac Power Systems, Inc. • P.O. Box 8, Waukesha, WI 53187 • generac.com

©2012 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Bulletin 0196510SBY-A / Printed in U.S.A. 10/24/12