

Technical specifications

COMPRESSOR TYPE	Maximum working pressure WorkPlace	Capacity FAD* min-max	Installed motor power	Sound level**	Weight WorkPlace	Weight WorkPlace Full Feature
	psig	cfm	hp	dB(A)	Lbs	Lbs
50 / 60 Hz version						
GA 7 VSD*	80	15.2-46.4	10	62	426	611
	102	14.8-46.0	10	62	426	611
	138	14.4-38.1	10	62	426	611
	181	15.5-30.1	10	62	426	611
GA 11 VSD*	80	15.5-69.7	15	63	432	617
	102	15.5-68.8	15	63	432	617
	138	14.8-57.6	15	63	432	617
	181	16.1-49.8	15	63	432	617
GA 15 VSD*	80	15.2-89.6	20	64	439	635
	102	15.0-88.6	20	64	439	635
	138	14.4-75.2	20	64	439	635
	181	15.5-59.1	20	64	439	635
GA 18 VSD*	58	31.7 - 133.8	25	67	809	1058
	102	31.2 - 131.0	25	67	809	1058
	138	35.9 - 112.3	25	67	809	1058
	181	34.4 - 91.1	25	67	809	1058
GA 22 VSD*	58	32.1 - 161.2	30	67	800	1069
	102	31.3 - 157.4	30	67	800	1069
	138	36.2 - 136.6	30	67	800	1069
	181	35.7 - 113.2	30	67	800	1069
GA 26 VSD*	58	31.3 - 181.8	35	67	822	1080
	102	30.6 - 180.7	35	67	822	1080
	138	35.7 - 165.1	35	67	822	1080
	181	34.6 - 135.8	35	67	822	1080
GA 30 VSD*	58	31.9 - 207.6	40	67	829	1103
	102	31.8 - 206.2	40	67	829	1103
	138	36.3 - 181.3	40	67	829	1103
	181	35.3 - 152.4	40	67	829	1103
GA 37 VSD*	58	32.4 - 246.4	50	67	829	1103
	102	31.3 - 243.1	50	67	829	1103
	138	36.2 - 216.3	50	67	829	1103
	181	34.6 - 183.4	50	67	829	1103

* Unit performance measured according ISO 1217 ed. 4 2009, annex E, latest edition.


** Mean noise level measured at a distance of 1 m according to ISO 2151: 2004 using ISO 9614/2 (sound intensity method); tolerance 3 dB(A).

Reference conditions:

- Absolute inlet pressure 1 bar (14.5 psi).
- Intake air temperature 20°C, 68°F.

FAD is measured at the following effective working pressures:

- 80psi
- 101psi
- 138psi
- 181psi

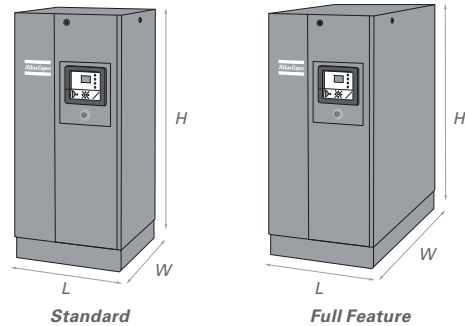

DIMENSIONS	Standard			Full Feature		
	L (in)	W (in)	H (in)	L (in)	W (in)	H (in)
GA 7-15 VSD*	25	24	56	25	39	56
GA 18-37 VSD*	31	32	63	31	50	63