

CONSTRUCTION

- Durable epoxy-coated cast iron housing/volute
- Top suction design eliminates air locks and minimizes clogging from debris in the bottom of the sump pit
- Reliable thermoplastic impeller for maximum water flow
- 1-1/2 in. NPT discharge for easy installation and compliance with building codes
- For use in 11 in. diameter or larger sump basins
- 8 ft. SJTW power cord

SWITCH

- Integrated vertical float switch for automatic or manual operation
- ON @ 9 in. / OFF @ 4 in.

MOTOR


- 120 Volt, PSC oil-filled motor
- Low amp draw for extended switch life

1/2 HP Cast Iron SUMP PUMP 65 GPM @ 5 FT.



1/2 HP


DIMENSIONAL DATA (INCHES)

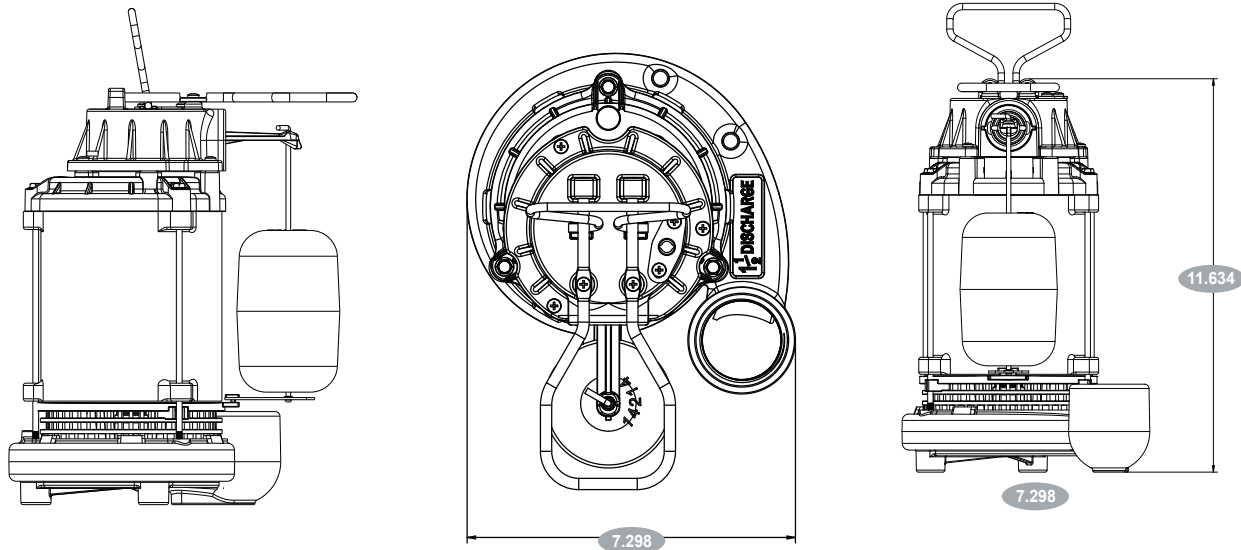


PUMP SNAPSHOT

Dimensions (in.)									
HP	Construction	Switch Type	Length	Width	Height	Weight	Volts	Footprint	Power Cord
1/2	Stainless Steel	Vertical Float	10	10	14	23 lbs	120	11 in.	8 ft.
Impeller	Intake	Discharge	Submersible	UPC 0-40066					
Centrifugal	Top Suction	1-1/2 in. NPT	Yes	217905					

TYPICAL INSTALLATION

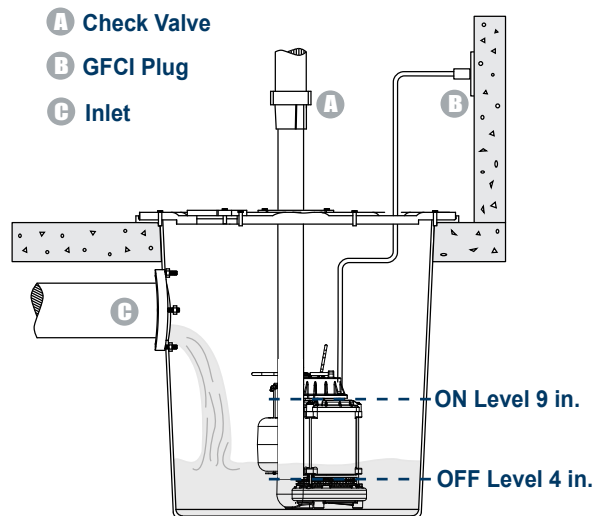

F50CIS PERFORMANCE

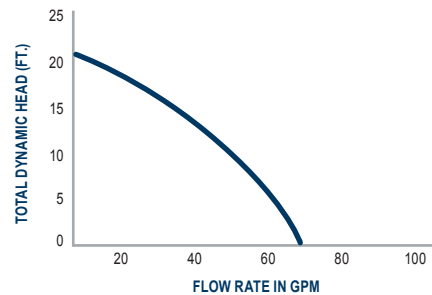

Discharge Head	5 ft.	10 ft.	15 ft.	20 ft.
GPM	65	52	35	10