

## CONSTRUCTION

- Stainless steel shaft and fasteners, for reliability long term in tough sewage applications
- Heavy-duty upper and lower ball bearings for long life and quiet operation
- 3 in. NPT discharge with 2 in. adapter capable of handling 2 in. solids
- 20 ft. SJTW power cord is oil and water resistant, with neoprene grommet for superior seal
- For use in 18 in. diameter or larger sump basins

## SWITCH

- Control box or pump switch required (sold separately, see accessories section)
- ON / OFF levels are user adjustable

## SEALS

- Carbon / ceramic shaft seal for maximum life

## MOTOR

- PSC oil-filled motor, thermally protected motor prevents overheating


# 2 HP CAST IRON COMMERCIAL GRADE SEWAGE PUMP 230 GPM @ 15 FT.



**2 HP**



## DIMENSIONAL DATA (INCHES)

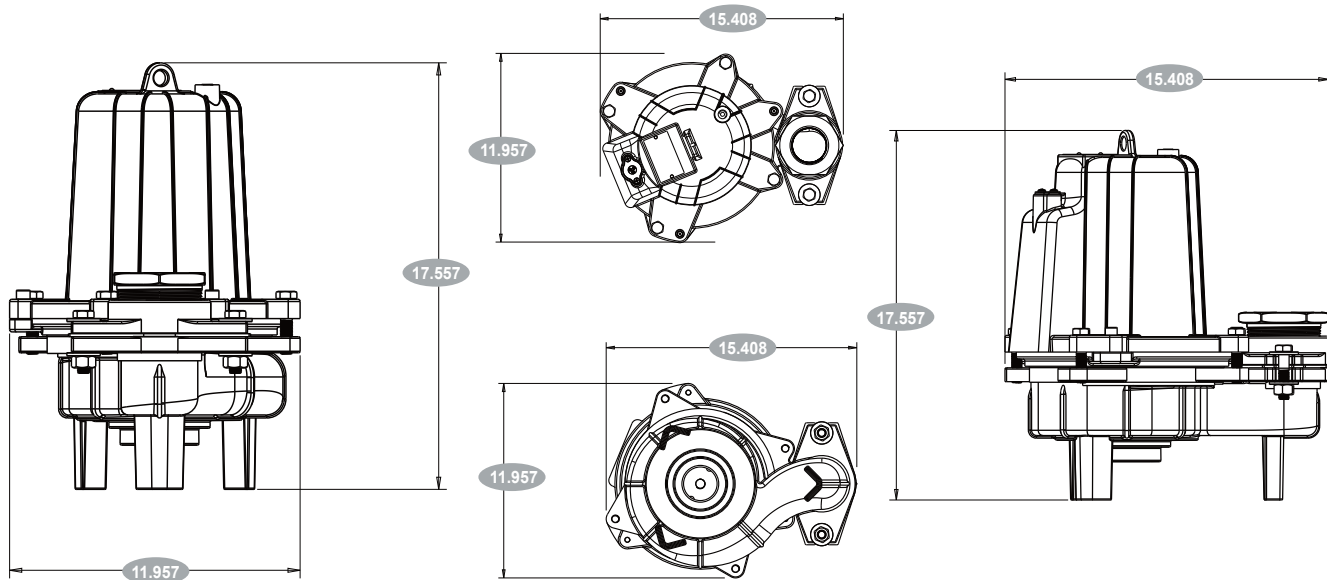


## PUMP SNAPSHOT

Dimensions (in.)									
HP	Construction	Switch Type	Length	Width	Height	Weight	Volts	Footprint	Power Cord
2	Cast Iron	Control Box	15.408	11.957	17.557	104 lbs	240	18 in.	Hard Wire


  

Impeller	Intake	Discharge	Submersible	UPC 0-40066
2-Vane	Bottom Suction	3 in. NPT	Yes	216298

## TYPICAL INSTALLATION

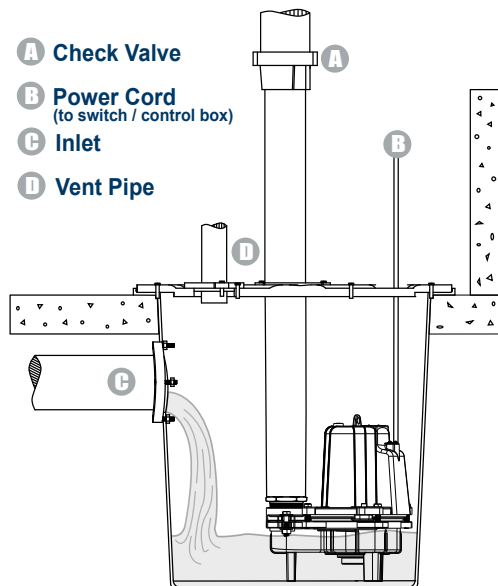

## 200SW PERFORMANCE

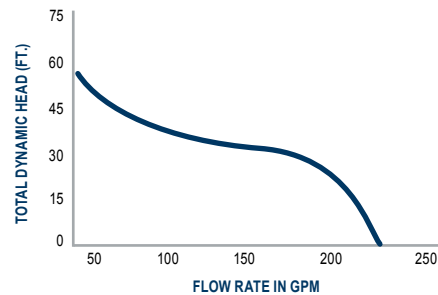

Discharge Head	10 ft.	15 ft.	20 ft.	25 ft.
GPM	-	230	200	165