


COMMERCIAL SERIES
24.0 GROSS HP†


724 CC

Bore 3.12 in. (79.20 mm)
Stroke 2.89 in. (73.40 mm)
Oil Capacity 64 fl. oz. (1.90 L)

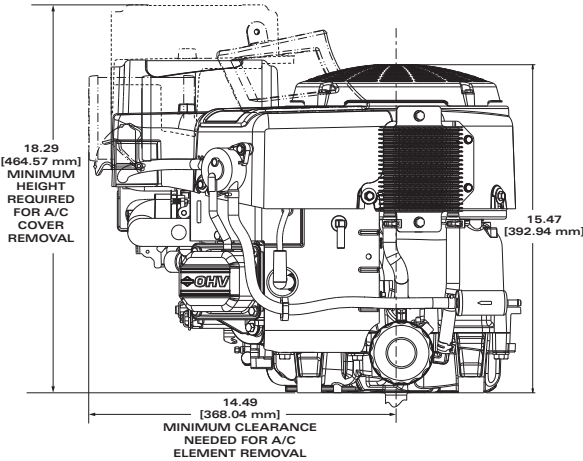

FEATURES:

- Mechanical compression release for easy, reliable starting
- Chrome plated exhaust valves reduce valve wear providing longer life
- Patented 5-Step Debris Management System for extended durability under heavy debris conditions
- Super-finished crank pin bearing for reduced friction and wear
- Buyer protection package provides two-year limited consumer engine warranty**

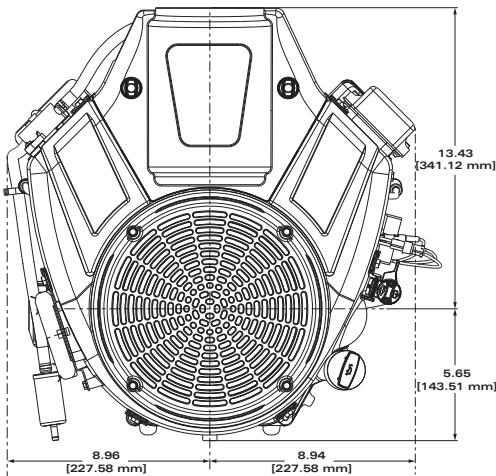

MTT	Crankshaft #	P.T.O. Diameter	Drilled & Tapped	Keyway	Length	Starter Position	Cyclonic Air Filter	Controls	Oil Cooler	Fuel Pump, Integral	Oil Pump with Filter	Choke-A-Matic	ReadyStart®	Remote Choke	Ground Wire Terminal	EFIM	Top Governor Speed	Notes
44T877																		
0001-G1	796237	1 in.	7/16-20	1/4-Str.	3-5/32	X	R	X	X	X	X	X			X		3300	6,14,15

†All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.
(6) Engine equipped with 12 Volt Gear Drive Starter and 16 AMP DC Alternator
(14) Supress Afterfire Solenoid
(15) Static Cover Installed
Engines in bold type have promotional pricing