


5.50 GROSS TORQUE*

140 CC

Bore 2.50 in. (65.60 mm)

Stroke 1.75 in. (44.50 mm)

Oil Capacity 16 fl. oz. (0.47 L)

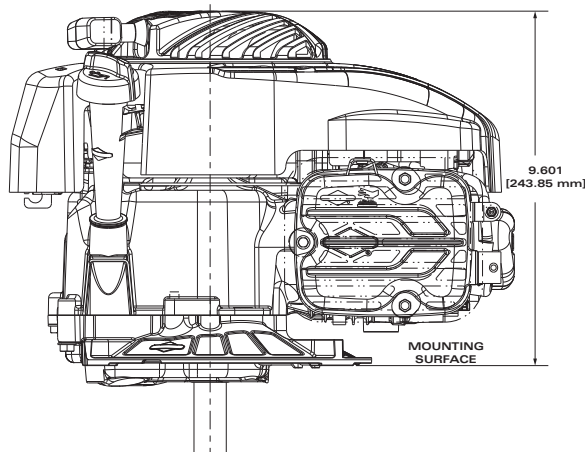

FEATURES:

Optional ReadyStart® starting system with no prime, no choke, no worries, just pull for power

Dual-sealing air cleaner for improved debris resistance and longer life


Lightest engine in its class by 30% for easier maneuverability

Acoustically-engineered muffler for quiet operation and excellent tonal quality

Less vibration for more user comfort and enhanced engine life

Mechanical Governor

Buyer protection package provides two-year limited consumer engine warranty**

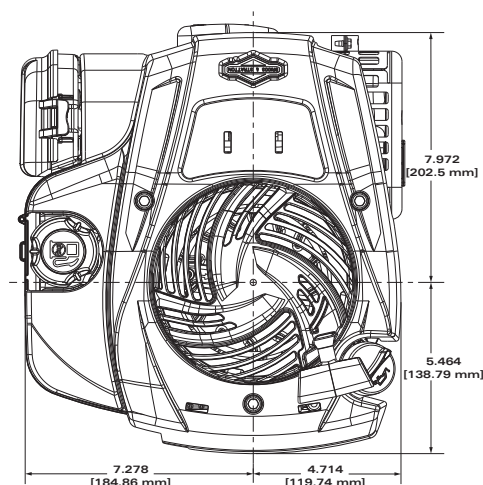

MTT	Crankshaft #	P.T.O. Diameter	Drilled & Tapped	Keyway	Length	Starter Position	Ext. Starter Rope	Heavy Flywheel	Controls	5 Position Choke	Primer Carburetor	ReadyStart®	Oil Pump w/Filter	Fuel Tank (Quarts)	Top Governor Speed	CPSC Blade Break	Notes
9P702																	
0045-F1	590538	7/8 in.	3/8-24	2 #505 WK, 3/16-Str.	3-5/32	5:30			FC			X	.8	3100	X		
0046-F1	590537	7/8 in.	3/8-24	2 #505 WK, 3/16-Str.	2-7/16	5:30			FC			X	.8	3100	X		
0087-F1	590538	7/8 in.	3/8-24	2 #505 WK, 3/16-Str.	3-5/32	5:30			FC		X		.8	3100	X		
0116-F1	591152	7/8 in.	3/8-24	2 #505 WK, 3/16-Str.	1-13/16	5:30			R			X	.8	3300	X		
0181-F1	591152	7/8 in.	3/8-24	2 #505 WK, 3/16-Str.	1-13/16	5:30		X	FC		X		.8	3800			

*All power levels are stated gross torque at 2600 RPM per SAE J1940 as rated by Briggs & Stratton.

**See www.briggsandstratton.com for warranty details.