



CALIFORNIA AIR TOOLS 20015 Ultra Quiet, Oil-Free and Powerful 1.5 Hp Portable 20-Gallon Air Compressor



70 dB Noise Level

Working Pressure 105-135 PSI

**1.5 HP
(Rated/Running)**

20 Gallon Steel Tank

**4.20 CFM @ 40 PSI
2.90 CFM @ 90 PSI**

The CALIFORNIA AIR TOOLS 20015 Ultra Quiet & Oil-Free 20-Gallon Air Compressor is designed to be one of the quietest 1.5 Hp air compressors in the industry having only 70 decibels of sound.

70 DECIBELS

**1.5 Hp Oil-Free
Dual-Piston**

Two Industrial Female
Quick connects(NPT 1/4")

Tank Pressure Gauge

Pressure Regulator


Regulated Output
Pressure Gauge

**Working Pressure
105-135 PSI**

20 Gallon Steel Air Tank

**89 lbs, 110 Volts/60 Hz,
13 Amps**



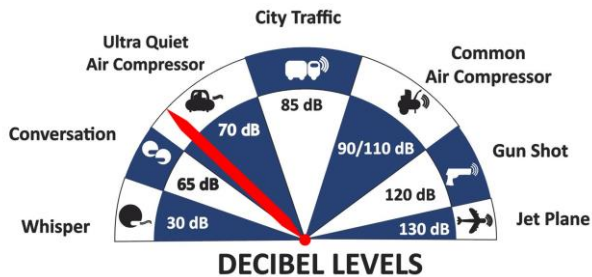

ULTRA QUIET

ONLY 70 DB NOISE LEVEL



The Oil-Free Dual Piston Pump System is engineered for high performance and durability. *

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

The large 20 Gallon Steel Air Tank is designed to store more air for higher demand air tools such as spray guns and sanders.
Perfect for the shop or garage.

The 2 (no flat) wheels and handle makes moving this air compressor very easy.

Designed for the person looking for Power, Air Flow, Less Service and Maintenance with at Least 25% Less Noise!

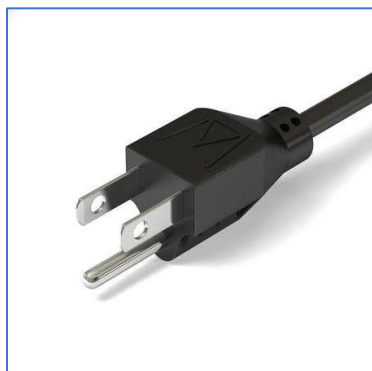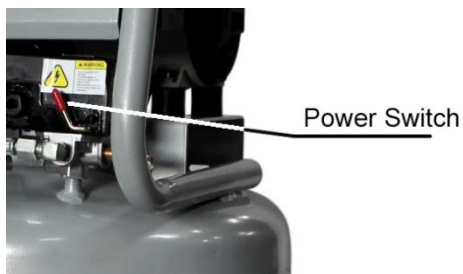

Industrial Female Push-To-Connect Air Ports (1/4" NPT)





FEATURES

- * **Ultra Quiet** - Only **70** decibels
- * Oil-Free Pump - Cleaner air for better tool operation.
Less maintenance and Costs.
- * Two pressure control gauges
- * Two - Female industrial "Push to Connect" quick connectors
- * Easy-to-Use Start/Stop Switch
- * Auto Pressure Switch
- * Working Pressure 105-135 PSI (+/-5 PSI)
- * 135 PSI Maximum Pressure
- * Output Air Pressure Regulator (adjustable from 0-105 PSI)
- * Thermal Overload Protector
- * Safety Relief Valve opens at 150 PSI
- * 110v / 60 hz
- * Low Amp Draw - 13 Amps
- * Dedicated 15-amp outlet -14-gauge 25ft cord - Min. 5000-Watt Generator
- * Time to fill tank from empty to full - 6.50 Minutes
- * Recovery time from 95 PSI to 125 PSI -1.8 Minutes
- * Duty Cycle - 70/30*
- * Maximum continuous running 60 min. (Depending PSI & CFM)
- * Less heat which dissipates more efficiently.
- * 20 Gal. Steel Air Tank
- * Wheel Kit (no flat) and (2) Air Filters
- * L (17.0") x W/D (19.25") x H (45.25")
- * 89 lbs
- * Non-ASME Air Tank
- * 1 Year Limited Warranty
- * Commercial Use: Refer to State & City Codes
- * Manufactured in China

For more information and to watch a 20015 product demonstration please visit California Air Tools:
<https://www.californiaairtools.com/contractor-grade-ultra-quiet-series-of-air-compressors/1-5-hp-air-compressors/cat-20015/>

Manufactured in China.

MODEL: 20015

PART NUMBER: CAT-20015

www.californiaairtools.com

Revision B: 03-2025