

# Anker SOLIX F1500 Portable Power Station

LiFePO4 Portable Power Station

1536Wh | 1800W

InfiniPower™


**HYPER  
FLASH**

*“Perfect for Your  
Off-Grid Adventure”*



# Highlights

## LiFePO4 Batteries Last 6X Longer



## 13 Ports for All Appliances

1 Car Outlet (120W Max)

2 USB-C Ports (100W PD Max)

4 USB-A Ports (12W Each)

6 AC Outlets (1800W Total Output)



## Massive Capacity, More Power at Once

Desk Lamp (12W) 35.2 H

18 cu. ft. Fridge (360W) 7.2 H

Coffee Maker (1000W) 1.3 H

Toaster Oven (1500W) 0.8 H



# Highlights

## Multiple Ways to Recharge

Recharge from 0-100% in just 2 hours

**HYPERSHOCK**  
**FLASH**



AC



Solar



Car

## Anker App for Smart Control



Check Status  
Anytime




Low Power  
Alerts



Schedule  
Power Usage



Connect via  
Bluetooth or Wi-Fi

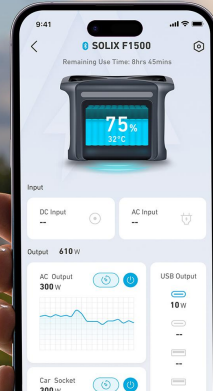

## Fast Recharging via Solar Power

With 600W solar charging, go from 0-100% in just 3.6 hours.



# Specifications

## Product Model

PN	A1772
Model Name	Anker SOLIX F1500 Portable Power Station

## Battery Info

Type of Battery	LiFePO4
Capacity (Wh)	1536
Capacity (mWh)	480000
Cycle Life	3000+ (to 80%)



# Specifications

## Output Info

Maximum Output	1842W (For US/CA/EU/UK/KSA/RSA/AU) 1542W (For JP)	Special AC Socket	-
# of Output Ports	13 (For US/JP/CA) 9 (For EU/UK/KSA/RSA/AU)	# of USB-A Output	4
# of Standard AC Socket	6 (For US/JP/CA) 2 (For EU/UK/KSA/RSA/AU)	USB-A Rated Power	5V=2.4A (12W Max Per Port)
Standard AC Rated Power	US/CA/EU/UK/KSA/RSA/AU: 1800W JP: 1500W	USB-A Total Output	48W
Standard AC Surge Power	2400W	# of USB-C Output	2
AC Total Output	US/CA/EU/UK/KSA/RSA/AU: 1800W JP: 1500W	USB-C Rated Power (per port)	5V=3A; 9V=3A; 15V=3A; 20V=3A (60W Max) 5V=3A/9V=3A/15V=3A/20V=3A/20V=5A (100W Max)
AC Auto Shut-Off	Power Save Mode On (2hrs)	USB-C Total Output	160W
		USB auto shut-off	YES
		# of Car Outlet	1
		Car Outlet Rated Power	10.8~14V=10A (120W Max Per Port)

# Specifications

## Input Info

Input Voltage 100V (JP)  
120V (US/CA)  
230V (EU/UK/KSA/RSA/AU)

Total Input Power 1000W (AC Direct)

EST Recharge Time AC Recharging (2 hrs)  
Solar Panels (3.6 hrs)  
Car (15.2 hrs)

Use Ports While Recharging YES

Direct AC Input YES

Maximum AC Input Power 1000W

# of DC Input 1

DC Adapter NO

EST DC Adapter Recharge Time 10.5 hrs (120W Car Charger)

DC Input Size XT-60

Solar Input Power 11-32V $\approx$  10A; 32V-60V $\approx$  12.5A (600W Max)

EST Solar Recharge Time 2.2 hrs (600W)

Solar Panel Compatible YES

MPPT Support YES

# Specifications

## Screen Display Info

LCD Display	YES
% of Power	YES
Total Input Power	YES
EST Time to Fully Recharge	YES
Total Output Power	YES
EST Time to Deplete	YES
Input Ports	YES
Output Ports	YES

High-Temperature Alarm	YES
Low-Temperature Alarm	YES
LCD Display auto shut-off	YES
Power Saving Mode	YES
APP Connect	YES (BLE)
Remaining Battery for Expansion Battery	NO
Display Time before auto shut-off (with no operation to the powerhouse)	Default: 30s (can set on APP)

# Specifications

## Safety Info

Ingress Protection (Dust/Water Protection Level)	NO
Operation Temperature (°C/°F)	Charging: -20 -40°C / -4 -104°F Recharging: 0-40°C / 32-104°F
Overload Protection (AC)	>1800W
Over-current Protection (USB-A)	>2.4A
Over-current Protection (USB-C)	>3.6A (60W) >6A (100W)
Over-current Protection (DC)	>10A

## Weight & Dimension Info

Product Dimension (mm)	463 x 288 x 237
Package Dimension (mm)	532 x 363x 296
Un Box Dimension (mm)	549 x 398 x 311
Product Weight (kg)	19.8
Product Weight with Package (kg)	21.7
Product Weight for Transportation (with UN Box/kg)	47.8



# Specifications

## Illumination Info

Ambient Light	YES
Ambient Light Mode	Ambient Light Mode (3 Level) SOS Mode

## What You Get

AC Adapter	-
Cable	AC Charging Cable 150cm Car Charging Cable 300cm Solar Charging Cable (1 to 3) 250cm

## Sales Market & Certification Info

Sales Market	US/CA/JP/EU/UK/KSA/RSA/AU
Certification Requirement	CB/CE/CEC/DOE/NRCan/FCC/IC/UL/UKCA/ UAE

**ANKER** ⚡ PowerHouse



<https://www.anker.com/portable-power-stations?ref=footer#partner>