

PFP-14HPKHL-EM-MR

PRESSURE AND VOLUME PUMP

This pressure/volume pump is the most suitable for drop-in units. The engine and pump are mounted on a steel protective frame with folding handles.

Also available in skid version



ENGINE SPECIFICATIONS

- CH440 Kohler air cooled engine
- Single cylinder, 4-stroke gasoline engine
- 12V electric start with recoil start as backup
- 1.8 gallon (7 l) integrated fuel tank
- 10 amp. charging system

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump, direct drive
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 1 1/2" (38 mm) delivery outlet with 1/4-turn ball valve
- One 2 1/2" (64 mm) suction inlet
- Dimensions: Length: 21 3/4" (552 mm); Width: 26 1/2" (673 mm); Height: 20 1/4" (514 mm)
- Wet weight: 162 lbs (74 kg)


INCLUDED ACCESSORIES

- Pressure gauge
- 12V-Battery
- Low oil shut-off

PERFORMANCE

MAX FLOW: 240 GPM
MAX PRESSURE: 130 PSI
215 GPM @ 25 PSI

170 GPM @ 50 PSI
105 GPM @ 100 PSI

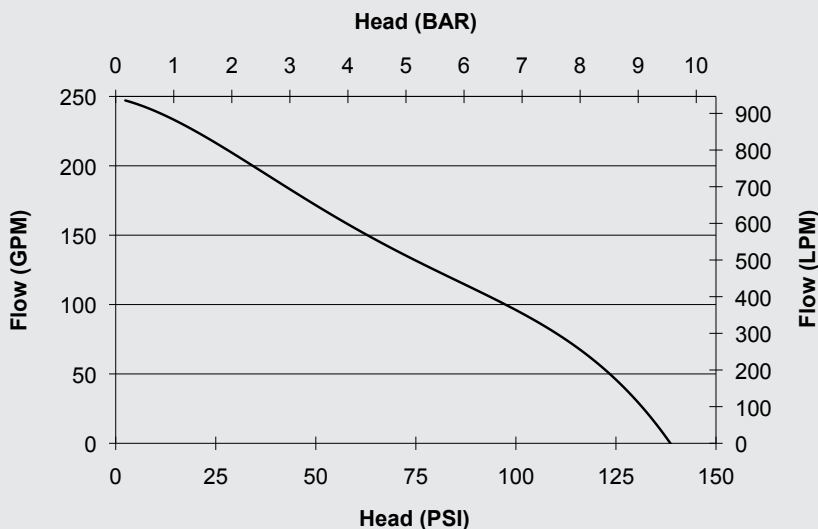

0816

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com