

PFP-13hpHND-EM-HP80

HONDA POWERED PUMP

The HP80 model is a compact pump that delivers amazing pressure and flow rate performance so as to meet the needs of several applications.

Also available in skid version



ENGINE SPECIFICATIONS

- GX390 Honda air cooled engine
- Single cylinder, 4-stroke gasoline engine
- 12V electric start with recoil start as backup
- 1.6 gallon (6.1 l) integrated fuel tank
- Charge coil 12V-3A

PUMP UNIT SPECIFICATIONS


- Direct drive C.E.T. single stage centrifugal pump
- Pump body made from resistant aluminum alloy
- Aluminum impeller
- Mechanical shaft seal
- Self priming system
- Two 1 1/2" (38 mm) delivery outlets (NPSH threads) and one 2 1/2" (65 mm) delivery outlet (NPSH threads)
- One 3" (76 mm) suction inlet (NPSH threads)
- Dimensions: Length: 23" (584 mm);
- Width: 27" (686 mm); Height: 20 1/2" (520 mm)
- Wet weight: 143 lbs (65 kg)

INCLUDED ACCESSORIES

- Low oil alert

PERFORMANCE

MAX FLOW: 230 GPM **140 GPM @ 50 PSI**
MAX PRESSURE: 115 PSI **60 GPM @ 100 PSI**
190 GPM @ 25 PSI

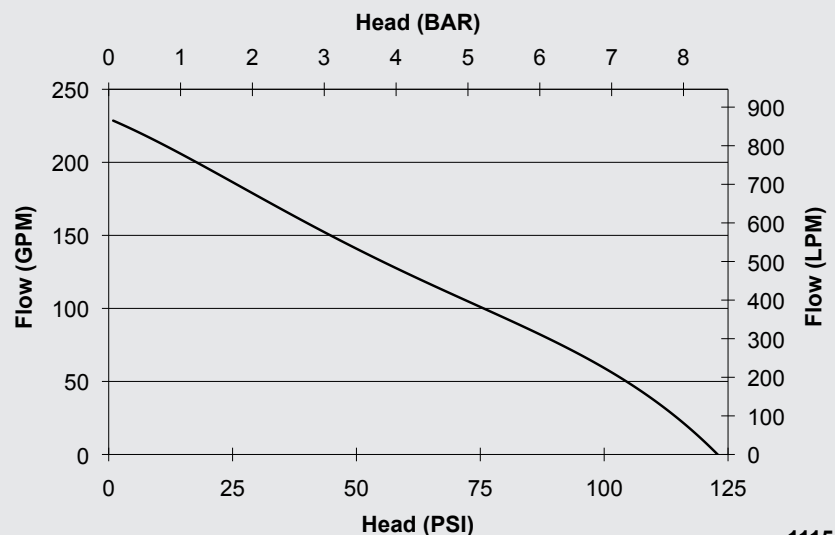

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY
OF ENGINEERING
FOR THE BRAVEST

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com