



Wholesale Water Treatment

“Electronic Touch Screen” AOW-S400 & S500



1st Screen when plugged in. At this point all you have to do set the hardness. Press the “>” symbol.



Press + or - button to adjust. Then press SAVE. At this point the unit is set. Just one setting and it's ready to go!!! Simple!



Now press BACK for the Main Menu.



Now for a couple of features.
Press ">" next to DISPLAY.



By pressing the “<” next to UNITS, you toggle between “English” and “Metric”




At this point you can set the TIME, if you'd like.
Pressing the ">" key gets you to that screen.



Press the + or – button to adjust.
Press SAVE and BACK.



Now press NEXT.

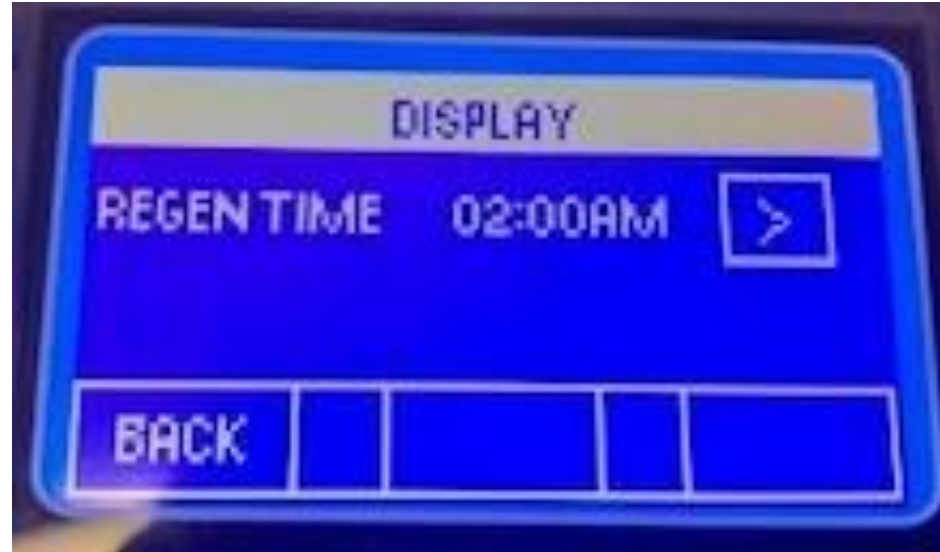

Here you can set the regeneration time if desired.
This is used if put into the “Delay” mode.
Press “>” to set the REGEN time.



Use the + or – button to change time and press SAVE. Then press BACK three times to get back to MAIN MENU.



Now press NEXT and you will be at the
REGENERATION selection.



Press “>” to enter the Regeneration TYPE and MODE selection.



Press ">" next to TYPE and/or MODE to enter the selection menu.



“MODE” toggles between DEMAND (factory setting) and DELAY. Delay lets the unit follow the time of day and then regenerates at the time selected.



“TYPE” selection offers 3 choices.

1. High Efficiency (factory setting) and uses 3 lbs. of salt per regeneration.
2. High Capacity uses 7 lbs. of salt per regeneration.
3. Automatic allows the unit to select on its own, which regeneration to use and how often.



Once TYPE and MODE are selected, press BACK twice and you're back to the MAIN MENU.



This is the screen that comes up when you touch the screen later on. (The screen goes off automatically and comes to life when touched.) It shows gallons remaining until regeneration.

1. MENU – takes you through as discussed earlier.
2. HELP – gives you the 800 Tech number.
3. REGEN – You can select to regenerate immediately.



That covers the electronic display. Simple, clear, concise design! Enjoy!