DIXIE CHOPPER®
The World's Fastest Lawn Mower®

MAGNUM HP

The demand for affordable commercial machines with heavy-duty features is at an all time high, and Dixie Chopper delivers the best solution with the Magnum HP series. These machines are equipped with canister engine air filtration, Hydro-Gear® ZT-3400 transaxles, an OCDC (Operator Controlled Discharge Chute) to instantly mulch or control the direction of clippings, and a deluxe seat for enhanced operator comfort. The new Magnum HP is the perfect addition to any commercial fleet or demanding homeowner with models capable of mowing over 4 acres per hour. Test drive the new Magnum HP to experience the difference!

MODELS

2250HP 2350 EFI
2460HP

4 YEAR BUMPER TO BUMPER WARRANTY*

*up to 500 hours for residential use
2 year unlimited hour commercial use

Magnum 2250HP shown
Actual production model and specifications may vary

FEATURES

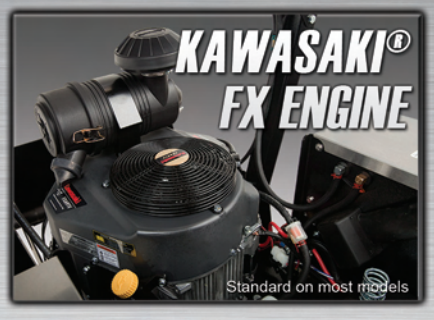

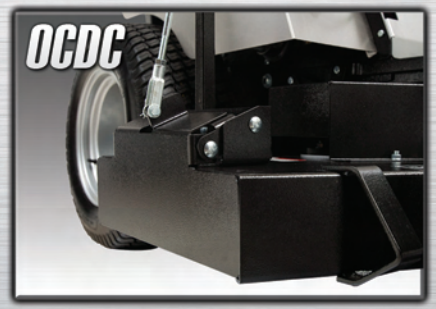

DIXIE CHOPPER®
The World's Fastest Lawn Mower

MAGNUM HP

Engine	2250HP	2350 EFI	2460HP
Manufacturer	Kawasaki ® FX	Kohler® EFI	Kawasaki ® FX
Horsepower	22HP at 3600RPM	23HP at 3600RPM	23.5HP at 3600RPM
Displacement	726cc	694cc	726cc
Crankshaft	Vertical Shaft	Vertical Shaft	Vertical Shaft
Oil System	Gear-Driven	Gear-Driven	Gear-Driven
Air-Cleaner	Standard	Standard	Standard
Cooling	Air Cooled	Air Cooled	Air Cooled
Electrical			
Battery	12 Volt, 300cca	12 Volt, 300cca	12 Volt, 300cca
Charging System	15 Amp Alternator	15 Amp Alternator	15 Amp Alternator
Presence Control	Seat Switch Safety Shut-off	Seat Switch Safety Shut-off	Seat Switch Safety Shut-off
Hour Meter	Digital, Tachometer, Voltmeter, Service Alerts	Digital, Tachometer, Voltmeter, Service Alerts	Digital, Tachometer, Voltmeter, Service Alerts
Fuel System			
Fuel Type	Gasoline	Gasoline	Gasoline
Fuel Capacity	8 Gallon	8 Gallon	8 Gallon
Fuel Valve	3 Position/Shut-off	3 Position/Shut-off	3 Position/Shut-off
Drive System			
Transaxle	Hydro-Gear® ZT3400	Hydro-Gear® ZT3400	Hydro-Gear® ZT3400
Controls			
Directional Control	Independent Steering Levers	Independent Steering Levers	Independent Steering Levers
Blade Engagement	PTO Switch	PTO Switch	PTO Switch
Deck Height Adjustments	Manual Lift, 1/4" Increments	Manual Lift, 1/4" Increments	Manual Lift, 1/4" Increments
Ignition	Key Switch	Key Switch	Key Switch
Throttle/Choke	Standard	Standard/ Choke N/A	Standard
Deck Deflector	OCDC - Operator Controlled Discharge Chute	OCDC - Operator Controlled Discharge Chute	OCDC - Operator Controlled Discharge Chute
Parking Brake	Standard - Intergrated in Transaxle	Standard - Intergrated in Transaxle	Standard - Intergrated in Transaxle
Body			
Frame	Welded 2X2 Tube, 7ga Formed	Welded 2X2 Tube, 7ga Formed	Welded 2X2 Tube, 7ga Formed
Fenders	Stainless Steel	Stainless Steel	Stainless Steel
Floor-pan	Flip-up, Steel	Flip-up, Steel	Flip-up, Steel
Seat	Standard Seat with Armrest	Standard Seat with Armrest	Standard Seat with Armrest
Engine Guard	Standard	Standard	Standard
Towing Capacity	200 lbs	200 lbs	200 lbs
Springer Forks	Optional	Optional	Optional
Mower Deck			
Deck Size	50 Inches	50 Inches	60 Inches
Construction	10 ga Formed & Welded	10 ga Formed & Welded	10 ga Formed & Welded
Top Plate	7 ga Bolted (Not Welded)	7 ga Bolted (Not Welded)	7 ga Bolted (Not Welded)
Blades	3 - 17.875" Blades	3 - 17.875" Blades	3 - 21.375" Blades
Tip Speed (Approximate)	17,000 fpm	17,000 fpm	16,500 fpm
Spindle Housings	1pc Keyless Sealed Cast Iron	1pc Keyless Sealed Cast Iron	1pc Keyless Sealed Cast Iron
Spindles	1.25" Effective Diameter Machined Shaft	1.25" Effective Diameter Machined Shaft	1.25" Effective Diameter Machined Shaft
Anti-Scalp Rollers	Standard	Standard	Standard
Pulleys	Vented Split 3/16" Steel Deep Groove	Vented Split 3/16" Steel Deep Groove	Vented Split 3/16" Steel Deep Groove
Electric Deck Lift	Optional	Optional	Optional
Deck Quick Lift	Integrated	Integrated	Integrated
Tires			
Rear Tires	23X10.5X12 Grass Master Tubeless 4ply	23X10.5X12 Grass Master Tubeless 4ply	23X10.5X12 Grass Master Tubeless 4ply
Front Tires	13X5X6 Tubeless 4ply	13X5X6 Tubeless 4ply	13X5X6 Tubeless 4ply
Dimensions & Performance (Approximate)			
Acres/Hour	3.3 Acres Per Hour	3.3 Acres Per Hour	4.1 Acres Per Hour
Cutting Height	1.5 Inches to 5 Inches	1.5 Inches to 5 Inches	1.5 Inches to 5 Inches
Overall Height (rollbar up)	73 Inches	73 Inches	73 Inches
Overall Height (rollbar down)	49 Inches	49 Inches	49 Inches
Overall Width	55 Inches	55 Inches	65 Inches
Overall Length (rollbar up)	80 Inches	80 Inches	80 Inches
Overall Length (rollbar down)	85 Inches	85 Inches	85 Inches
Overall Weight	865 Pounds	885 Pounds	924 Pounds

Specifications may change as we continually improve our products. For the latest information and mower specifications, please visit dixiechopper.com or visit your local Dixie Chopper dealer. Engine Horsepower information is provided by the engine manufacturer to be used for comparison only.

Revision 10/03/2013
Part Number 700369