DIXIE CHOPPER®
The World's Fastest Lawn Mower®

SILVER EAGLE

Looking for the most tried and true zero-turn mower in the industry? The Silver Eagle has seen minimal changes since its debut over 10 years ago. These models deliver value, performance, and diversity year after year. Engine options include Generac®, Kawasaki®, and a fuel efficient Kohler® EFI option. The Silver Eagle utilizes a conventional pump and wheel motor combination and is backed by the industry leading 5 year/3000 hour drivetrain warranty. All models feature the Elite X deck with X-Blade Technology which allows the operator to add a Twist blade to the exisiting X-Blade to increase the mulching effect. Many Commercial Cutters have found the perfect balance of compact size and great productivity in the Silver Eagle series from Dixie Chopper. Test drive a Silver Eagle today to experience the Dixie Chopper difference!

MODELS

2744 2750 2760
2760KW 2660 EFI

5 YEAR
BUMPER TO BUMPER
WARRANTY*
*up to 600 hours

Silver Eagle 2760KW shown
Actual production model and specifications may vary

FEATURES

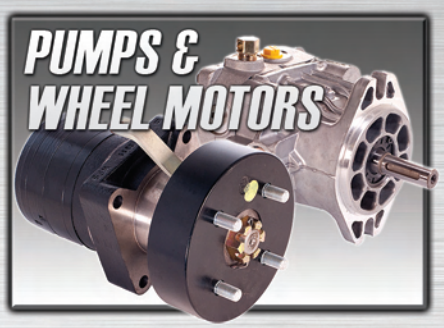

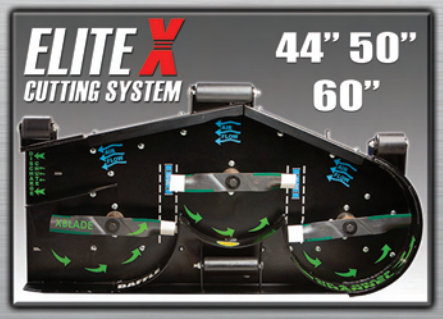

DIXIE CHOPPER®
The World's Fastest Lawn Mower

SILVER EAGLE

Engine	2744	2750	2760	2760KW	2660 EFI
Manufacturer	Generac®	Generac®	Generac®	Kawasaki® FX	Kohler® EFI
Horsepower*	27HP @ 3750RPM	27HP @ 3750RPM	27HP @ 3750RPM	27HP @ 3600RPM	26HP @ 3600RPM
Displacement	763cc	763cc	763cc	852cc	747cc
Crankshaft	Vertical Shaft	Vertical Shaft	Vertical Shaft	Vertical Shaft	Vertical Shaft
Oil System	Gear-Driven	Gear-Driven	Gear-Driven	Gear-Driven	Gear-Driven
Oil Safety Features	Low oil warning horn (98db)	Low Oil Warning Horn (98db)	Low Oil Warning Horn (98db)	Low Oil Warning Horn (98db)	Low Oil Warning Horn (98db)
Air-Cleaner	Dual Stage Donaldson	Dual Stage Donaldson	Dual Stage Donaldson	Dual Stage Donaldson	Dual Stage Donaldson
Cooling	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled
Electrical					
Battery	12 Volt, 300cca	12 Volt, 300cca	12 Volt, 300cca	12 Volt, 300cca	12 Volt, 300cca
Charging System	17 Amp Alternator	17 Amp Alternator	17 Amp Alternator	15 Amp Alternator	20 Amp Alternator
Presence Control	Seat Switch Safety Shut-off	Seat Switch Safety Shut-off	Seat Switch Safety Shut-off	Seat Switch Safety Shut-off	Seat Switch Safety Shut-off
Hour Meter	Digital, Tachometer, Voltmeter, Service Alerts	Digital, Tachometer, Voltmeter, Service Alerts	Digital, Tachometer, Voltmeter, Service Alerts	Digital, Tachometer, Voltmeter, Service Alerts	Digital, Tachometer, Voltmeter, Service Alerts
Fuel System					
Fuel Type	Gasoline	Gasoline	Gasoline	Gasoline	Gasoline
Fuel Capacity	8 Gallon	8 Gallon	8 Gallon	8 Gallon	8 Gallon
Fuel Valve	3 Position/Shut-off	3 Position/Shut-off	3 Position/Shut-off	3 Position/Shut-off	3 Position/Shut-off
Drive System					
Pump	Hydro-Gear® 10 Series	Hydro-Gear® 10 Series	Hydro-Gear® 12 Series	Hydro-Gear® 12 Series	Hydro-Gear® 12 Series
Wheelmotors	Parker® 240 Series	Parker® 240 Series	Parker® 240 Series	Parker® 240 Series	Parker® 240 Series
Controls					
Directional Control	Independent Steering Levers	Independent Steering Levers	Independent Steering Levers	Independent Steering Levers	Independent Steering Levers
Blade Engagement	PTO Switch	PTO Switch	PTO Switch	PTO Switch	PTO Switch
Deck Height Adjustments	Manual Lift, 1/4" increments	Manual Lift, 1/4" increments	Manual Lift, 1/4" increments	Manual, 1/4" increments	Manual, 1/4" increments
Ignition	Key Switch	Key Switch	Key Switch	Key Switch	Key Switch
Throttle/Choke	Standard	Standard	Standard	Standard	Standard/ Choke N/A
Deck Deflector	OCDC - Operator Controlled Discharge Chute	OCDC - Operator Controlled Discharge Chute	OCDC - Operator Controlled Discharge Chute	OCDC - Operator Controlled Discharge Chute	OCDC - Operator Controlled Discharge Chute
Parking Brake	Automotive Style	Automotive Style	Automotive Style	Automotive Style	Automotive Style
Body					
Frame	Welded 2X2 Tube, 7ga Formed	Welded 2X2 Tube, 7ga Formed	Welded 2X2 Tube, 7ga Formed	Welded 2X2 Tube, 7ga Formed	Welded 2X2 Tube, 7ga Formed
Fenders	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Floor-pan	Flip-up, Steel with Rubber Mat	Flip-up, Steel with Rubber Mat	Flip-up, Steel with Rubber Mat	Flip-up, Steel with Rubber Mat	Flip-up, Steel with Rubber Mat
Seat	Standard Seat with Armrest	Standard Seat with Armrest	Standard Seat with Armrest	Deluxe Suspension Seat with Armrest	Deluxe Suspension Seat with Armrest
Engine Guard	Standard	Standard	Standard	Standard	Standard
Spriner Forks	Optional	Optional	Optional	Standard	Standard
Towing Capacity	500 lbs	500 lbs	500 lbs	500 lbs	500 lbs
Mower Deck					
Deck Size	44 Inches	50 Inches	60 Inches	60 Inches	60 Inches
Construction	7 ga Formed & Welded	10 ga Formed & Welded	10 ga Formed & Welded	10 ga Formed & Welded	10 ga Formed & Welded
Top Plate	N/A	7 ga bolted not welded	7 ga bolted not welded	7 ga bolted not welded	7 ga bolted not welded
Blades	3-17 Inch Blades	3-17 Inch Blades	3-20.5 Inch Blades	3-20.5 Inch Blades	3-20.5 Inch Blades
Tip Speed (Approximate)	18,000 fpm	18,000 fpm	17,200 fpm	17,200 fpm	17,200 fpm
Spindle Housings	1pc Keyless Sealed Cast Iron	1pc Keyless Sealed Cast Iron	1pc Keyless Sealed Cast Iron	1pc Keyless Sealed Cast Iron	1pc Keyless Sealed Cast Iron
Spindles	1.25" Effective diameter machined shaft	1.25" Effective diameter machined shaft	1.25" Effective diameter machined shaft	1.25" Effective diameter machined shaft	1.25" Effective diameter machined shaft
Anti-Scalp Rollers	Standard	Standard	Standard	Standard	Standard
Pulleys	Vented Split 3/16" Steel Deep Groove	Vented Split 3/16" Steel Deep Groove	Vented Split 3/16" Steel Deep Groove	Vented Split 3/16" Steel Deep Groove	Vented Split 3/16" Steel Deep Groove
Electric Deck Lift	Optional	Optional	Optional	Optional	Optional
Deck Quick Lift	Standard	Standard	Standard	Standard	Standard
Tires					
Rear Tires	24X12X12 Turf Master Tubeless 4ply	24X12X12 Turf Master Tubeless 4ply	24X12X2 Turf Master Tubeless 4ply	24X12X12 Turf Master Tubeless 4ply	24X12X12 Turf Master Tubeless 4ply
Front Tires	13X6.5X6 Tubeless 4ply	13X6.5X6 Tubeless 4ply	13X6.5X6 Tubeless 4ply	13X6.5X6 Tubeless 4ply	13X6.5X6 Tubeless 4ply
Dimensions & Performance (Approximate)					
Acres/Hour	3.5 Acres Per Hour	4.0 Acres Per Hour	5.3 Acres Per Hour	5.3 Acres Per Hour	5.3 Acres Per Hour
Cutting Height	1.5 Inches to 5 Inches	1.5 Inches to 5 Inches	1.5 Inches to 5 Inches	1.5 Inches to 5 Inches	1.5 Inches to 5 Inches
Overall Height (rollbar up)	73 Inches	73 Inches	73 Inches	73 Inches	73 Inches
Overall Height (rollbar down)	49 Inches	48 Inches	48 Inches	48 Inches	48 Inches
Overall Width	49 Inches	54 Inches	65 Inches	65 Inches	65 Inches
Overall Length (rollbar up)	76 Inches	74 Inches	74 Inches	74 Inches	74 Inches
Overall Length (rollbar down)	96 Inches	94 Inches	94 Inches	94 Inches	94 Inches
Overall Weight	1042 Pounds	1104 Pounds	1215 Pounds	1215 Pounds	1215 Pounds

Specifications may change as we continually improve our products. For the latest information and mower specifications, please visit dixiechopper.com or visit your local Dixie Chopper dealer. Engine Horsepower information is provided by the engine manufacturer to be used for comparison only.

Revision 10/03/2013
Part Number 700370