

LITTLE WONDER®



CLEAN IT UP



Landscaping & Debris Management Equipment Catalog

WE'RE LITTLE WONDER,

and we've commanded attention in the green industry since 1922. We design and develop trusted landscaping and debris management equipment for customers with high expectations for performance and durability. Our debris management products span seven categories and include our famous line of Optimax walk-behind blowers and industry-leading TruckLoaders. We know how to use air power to move and collect debris better than anyone else. But enough about us. Let's talk about you.

As a professional landscaper, paving contractor or a dedicated DIY homeowner, you demand quality, convenience and durability. You put in long hours and expect your equipment to do the same. We understand your requirements completely and engineer our powerful equipment to stand up to your needs, season after season.

So please, browse our equipment catalog, create your wish list, and visit littlewonder.com to locate a dealer or rental shop near you.


PUT US TO WORK FOR YOU.

Optimax™ Blowers.....	3	Brush Cutter	12
Truckloaders	6	Bedshaper	14
AgVac.....	11	Pro Edger.....	15

MORE AIR POWER. LESS MAN POWER.

OPTIMAX™ BLOWERS

Little Wonder Optimax™ maximum output blowers are perfect for moving leaves, debris and standing water—or for any job that requires gale-force air. All models feature a split-stream air deflector, which minimizes “blow-back”, and adjustable, ergonomic handles with anti-vibration grip for operator comfort.

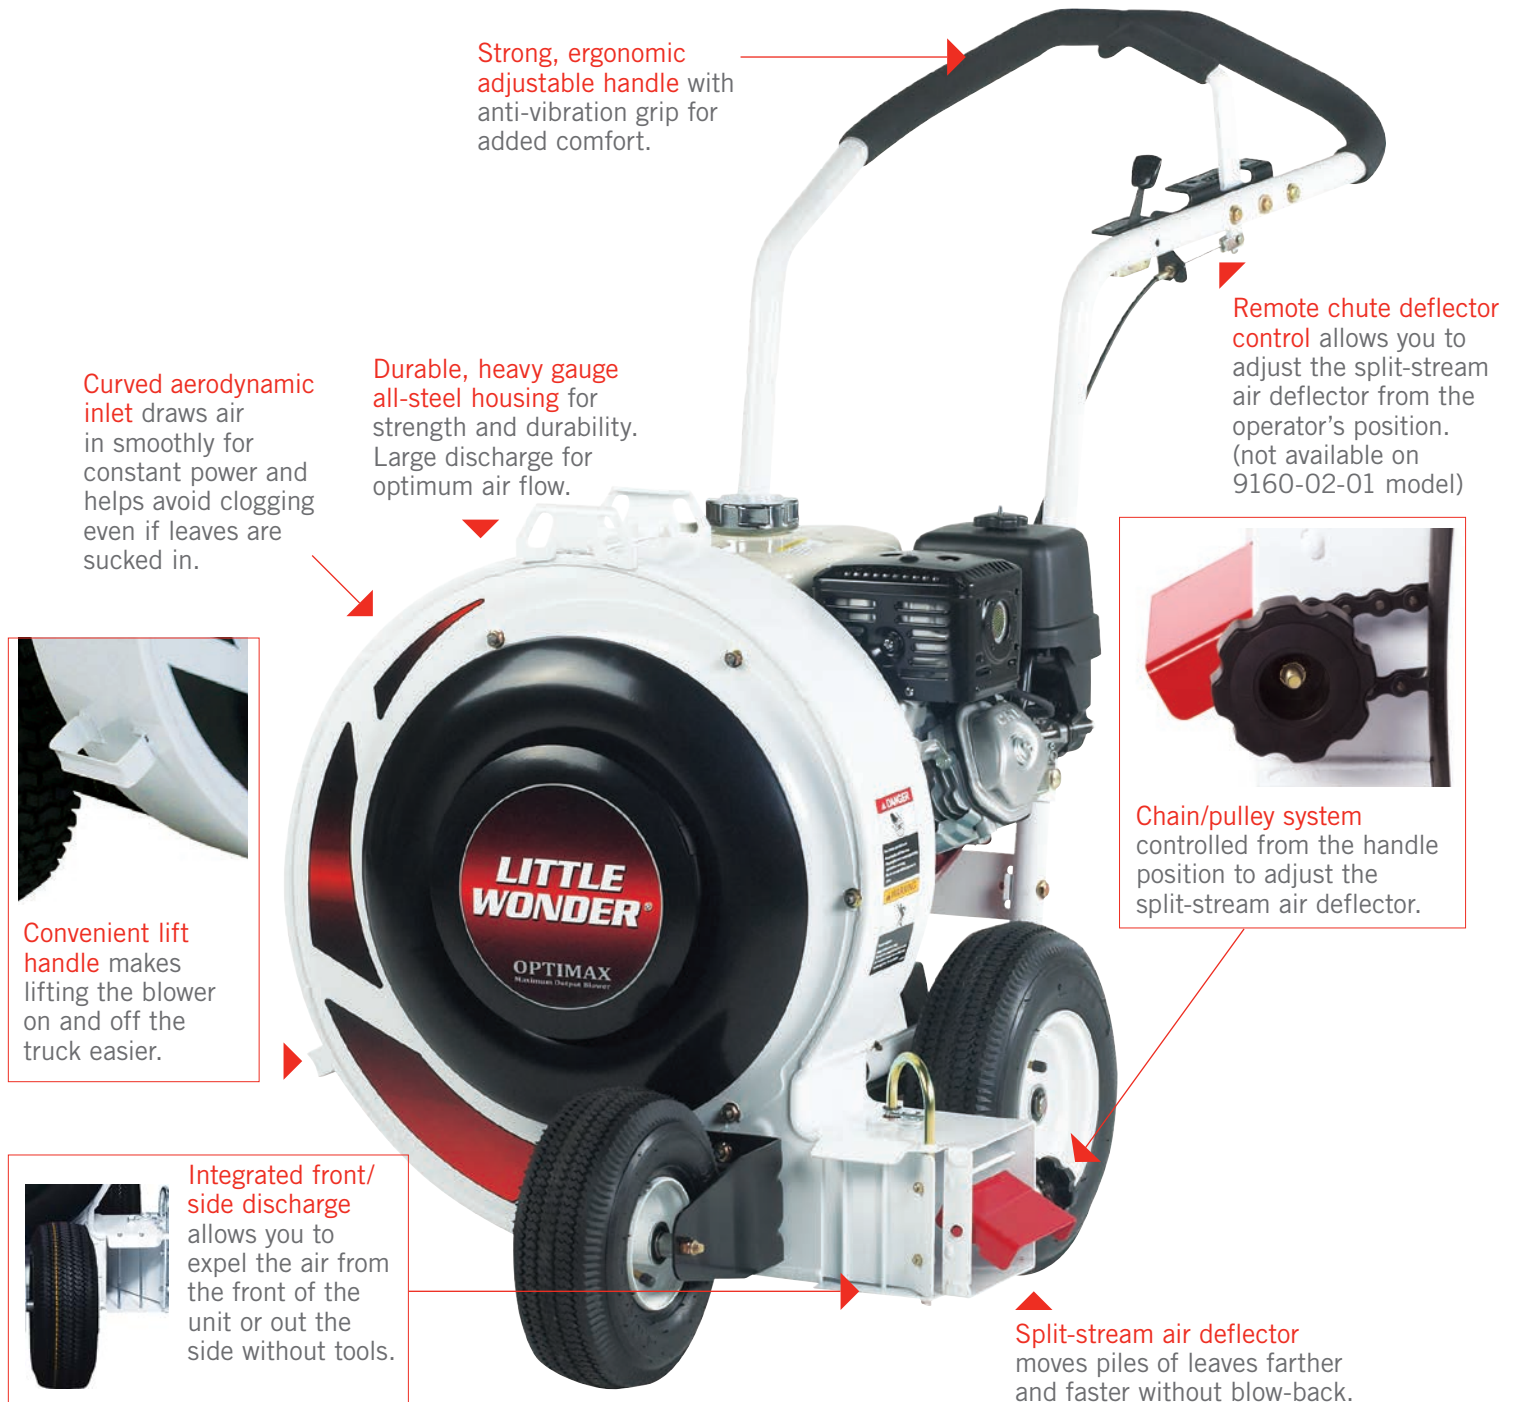

Push Optimax™ Blowers

Product No.	9270-02-01	9390-02-01
CE Product No.	9270-02-59	9390-02-59
Engine	Honda® GX270	Honda® GX390
Displacement (cc)	270	389
Fuel Capacity, gal (l)	1.4 (5.3)	1.6 (6.1)
Impeller Diameter, in (cm) / # Blades	17 (43.1) / 7	17 (43.1) / 7
Air Flow (CFM)	2,260	2,530
Air Speed, mph (km/h)	143 (230.1)	160 (257.5)
Air Flow Control	Remote	Remote
Front Tires, in (cm)	10 (25.4) Pneumatic	10 (25.4) Pneumatic
Rear Tires, in (cm)	12 (30.4) Pneumatic	12 (30.4) Pneumatic
Dimensions L x W x H, in (cm)	58 x 28 x 43 (147 x 71 x 109)	58 x 28 x 43 (147 x 71 x 109)
Weight, lbs (kg)	142 (65)	168 (77)

STANDARD FEATURES: OPTIMAX™ BLOWERS

- 2-position adjustable handle
- Durable, solid, front wheel is an available option for all Optimax blowers
- Continuously-welded steel housing
- One-piece engine deck
- Integrated front / side discharge
- Steel impeller with reverse angle
- 5-year warranty*

*Engines are warranted separately by manufacturer.



Powerful 7 blade steel impeller produces high airflow while the scrolled housing allows uninterrupted air intake. Even if a portion of the housing is covered with leaves and debris, airflow can still enter the impeller area and be forced out the discharge chute.



OPTIMAX ACCESSORIES

**PARKING BRAKE**

Secure transport and reduce roll offs with the Little Wonder parking brake. The optional parking brake attaches to the main deck of the blower and secures BOTH wheels - enhancing stability on hills and in the back of a truck. It is easily engaged and disengaged by foot.

Item Number	4174094
Kit Weight, lbs (kg)	6 (2.72)
Material	Steel
Finish Color / Style	Black / Powder Coat
Length, in (cm)	10.5 (26.67)
Adjustment	Dual action spring, positioning done by foot
Compatibility	Optimax Push models only except 9160-02-01

**SOLID FRONT WHEEL**

The solid wheel adds durability, which is of particular importance when the blower is used over tough and abrasive terrain. The optional solid wheel attaches quickly using the hardware already available on the Optimax blowers.

Item Number	4173815
Kit Weight, lbs (kg)	10 (4.53)
Material	Rubber
Diameter, in (cm)	10.5 (26.67)
Wheel Bearing	Pressed-fit ball bearing
Compatibility	All Optimax blowers

**SWIVEL WHEEL KIT**

Optional, easy to install, Swivel Wheel Kit for 360° turning and control. Wheel can also lock into a straight position. Minimizes wear and tear on tires.

Item Number	9050
Kit Weight, lbs (kg)	15 (6.8)
Material	Steel
Finish Color / Style	Black / Powder Coat
Compatibility	All Optimax™ blowers except for 9570-04-01 and 9570-14-01

**TOOL HOLDER**

The optional tool holder attaches to either side of a blower. Add two for maximum productivity.

Item Number	4174355
Kit Weight, lbs (kg)	2 (0.9)
Material	12 Gauge Steel
Finish Color / Style	Red / Powder Coat
Compatibility	All Optimax blowers



Optimax™ Blower
(Shown with optional accessories)



BIG BITE. EVEN BIGGER PROFITS.

SKID & TOW-BEHIND TRUCKLOADERS

Little Wonder Monster TruckLoaders are all bite, attacking debris with ease. These monstrous machines allow you to fit more in the truck and clear more properties between offloads for higher productivity and more profit.



18HP



29HP



35HP

STANDARD FEATURES

- Replaceable steel housing liner
- Stack gaskets seal in airflow and lock in debris moisture
- Flexible intake hose
- Flexible discharge hose
- 12V Battery
- 2-year warranty*

*Engines are warranted separately by manufacturer.

Mounting Options: Skid, Swing-Away Hitch (18HP)
or Tow-Behind (excludes 18HP)




49HP



INDUSTRY LEADING 15 TO 1
REDUCTION RATIO



What makes a Little Wonder Monster TruckLoader a real beast? A four blade steel impeller with shredding teeth on all three debris touch points provides the best shredding ratio in the industry—**UP TO A MONSTROUS 15 to 1.**

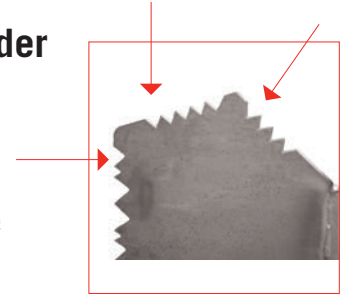

Skid & Tow-Behind TruckLoaders

Skid Mount Swing or Tow Behind	8183-04-01 8184-04-01	8293-04-01 8295-04-01	8353-04-01 8355-04-01	8493-06-01 8495-06-01
CE Product No.	8183-04-59 8184-04-59	N/A	N/A	N/A
Engine	B&S Vanguard™	B&S Vanguard™	B&S Vanguard™	Kohler® Diesel KDI
Engine Power (HP)	18	29	35	49
Fuel Capacity, gal (l) / Fuel Type	1.5 (5.6) / Gasoline	6 (22.7) / Gasoline	7 (26.4) / Gasoline	22 (83.2) / Diesel (FT4)
Emissions Compliance	EVAP / 49-state	EVAP / 49-state	EVAP / 49-state	Final Tier 4 (FT4)
Mount	Skid Mount Swing-Away	Skid Mount Tow Behind	Skid Mount Tow Behind	Skid Mount Tow Behind
Hitch Class Requirements (min)	Class III	Class III	Class III	Class III
Hitch Type	N/A Square Receiver	N/A Ball Coupler	N/A Ball Coupler	N/A Ball Coupler
Starter	Electric / Pull	Electric	Electric	Electric
Impeller Mount / Drive	Taper Lock Hub / Direct	Taper Lock Hub / Direct	Taper Lock Hub / Belt	Taper Lock Hub / PTO clutch
Impeller Diameter, in (cm) / Type	20 (50.8) / Serrated	19.75 (50.2) / Serrated	25 (63.5) / Serrated	25 (63.5) / Serrated
Impeller Blades / # Cutting Points	4 / 48	4 / 48	4 / 48	4 / 48
Impeller Material / Thickness, in (mm)	Steel / 3/8 (9.5)	Steel / 3/8 (9.5)	Steel / 1/2 (12.7)	Steel / 1/2 (12.7)
Air Flow (CFM)	3,510	4,710	6,950	7,600
Housing Liners, in (mm)	3/16 (4.7) Steel	1/4 (6.3) Steel	1/4 (6.3) Steel	1/4 (6.3) Steel
Flexible Intake Hose (D x L)	10" (25.4cm) x 10' (3m)	12" (30.4cm) x 10' (3m)	16" (40.6cm) x 10' (3m)	16" (40.6cm) x 10' (3m)
Flexible Discharge Hose (D x L)	7" (17.7cm) x 3' (0.9m)	8" (20.3cm) x 5' (1.5m)	12" (30.4cm) x 6' (1.8m)	12" (30.4cm) x 6' (1.8m)
Axle Rating, lbs (kg)	N/A	2,000 (907)	3,500 (1,587)	3,500 (1,587)
Suspension	N/A	N/A	Torflex®	Torflex®
Tire-Wheel	N/A	N/A ST205 / 75 D15	N/A ST205 / 75 D15	N/A ST205 / 75 D15
Assembled Dimensions L x W x H, in (cm)	25 x 29 x 84 (62 x 72 x 213)	40 x 37 x 98 (102 x 94 x 249) 87 x 54 x 109 (221 x 138 x 277)	46 x 51 x 94 (117 x 130 x 239) 99 x 65 x 114 (252 x 165 x 290)	
Dry Weight, lbs (kg)	460 (209) 580 (263)	727 (330) 1,090 (494)	1,155 (524) 1,555 (705)	1872 (849)* 2272 (1031)

*pre-production estimate



BIG BITE. BIG BELLIES.

SELF-CONTAINED TRUCKLOADERS

Little Wonder Monster Self-Contained TruckLoaders are an all-in-one leaf and pine needle collection system that includes a truckloader, large-capacity dump container, and trailer. A turnkey system you tow with your work truck.

5-Yard Gravity Dump

FEATURES


- 65° Fixed dump bed angle allows gravity to help offload materials
- Double barn doors (rear) w/sidewall door latches secure doors when open for offloading
- Removable roof screens
- 29HP B&S Vanguard™ engine



Removeable
roof screens

IMPELLER SHREDDING POWER

15:1 DEBRIS REDUCTION

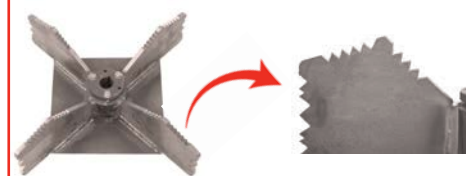



10-Yard Hydraulic Lift

FEATURES

- Hydraulic lift, 50° dump angle
- Removable upper walls is like having two dump trailers in one!
 - Full dump box (5'H) hauls 10 yards of lightweight bulky debris
 - Half dump box (2'H) allows you to tote and dump heavier materials like salt, topsoil or gravel.
- Easy hitch-and-go system, 2-5/16" ball coupler road ready trailer (Pintle eye optional)
- Engine choice: 35HP Briggs & Stratton® Vanguard™ gas or 49HP Kohler® diesel



Hydraulic lift, 50° dump angle



Removable top walls convert the container for hauling







Self-Contained TruckLoaders


Product No.	82965-04-01	83560-04-01	84960-06-01
Engine	B&S Vanguard™	B&S Vanguard™	Kohler® Diesel KDI
Engine Power	29HP	35HP	49HP
Fuel Capacity, gal (l) / Fuel Type	6 (22.7) / Gasoline	7 (26.4) / Gasoline	22 (83.2) / Diesel
Emissions Compliance	EVAP/49-state	EVAP/49-state	Final Tier 4 (FT4)
Hitch Class Requirements (min)	Class III	Class III	Class III
Hitch Type	Ball Coupler	Ball Coupler	Ball Coupler
Starter	Electric	Electric	Electric
Impeller Mount / Drive	Taper Lock Hub / Direct	Taper Lock Hub / Belt	Taper Lock Hub / PTO clutch
Impeller Diameter, in (cm) / Type	19.75 (50.2) / Serrated	25 (63.5) / Serrated	25 (63.5) / Serrated
Impeller Blades / # Cutting Points	4 / 48	4 / 48	4 / 48
Impeller Material / Thickness, in (mm)	Steel / 3/8 (9.5)	Steel / 1/2 (12.7)	Steel / 1/2 (12.7)
Air Flow (CFM)	4,712	6,951	7,600
Housing Liners, in (mm)	1/4 (6.3) Steel	1/4 (6.3) Steel	1/4 (6.3) Steel
Flexible Intake Hose (D x L)	12" (30.4cm) x 10' (3m)	16" (40.6cm) x 10' (3m)	16" (40.6cm) x 10' (3m)
Flexible Discharge Hose (D x L)	8" (20.3cm) x 5' (1.5)	12" (30.4cm) x 6' (1.8)	12" (30.4cm) x 6' (1.8)
Axle Rating, lbs (kg)	3,500 (1,588)	Dual 6,000 (2,728)	Dual 6,000 (2,728)
Suspension	Torflex®	Leaf springs	Leaf springs
Tire/Wheel	700-15LT	700-15LT	700-15LT
Container Type	5-Yard Gravity Dump Trailer	10-Yard Hydraulic Dump Trailer	10-Yard Hydraulic Dump Trailer
Container Dimensions L x W x H, ft (m)	8 x 5 x 6 (2.4 x 1.5 x 1.6)	Full dump box 9 x 6 x 5.5 (2.7 x 1.6 x 1.6) Half dump box 9 x 6 x 2 (2.7 x 1.6 x 0.6)	
Container Dump Angle / Type	65° / Fixed	50° / Hydraulic lift	50° / Hydraulic lift
Container Doors	Double barn doors (rear) w/sidewall door latches		Two-way lower tailgate. Top hinged upper tailgate
Container Hydraulics	N / A	12-volt two-way hydraulic pump w/push button controls	
Assembled Dimensions L x W x H, in (cm)	172 x 72 x 88 (436.8 x 182.8 x 223.5)		233 x 90 x 87 (591.8 x 228 x 220.9)
Dry Weight, lbs (kg)	2,210 (1,002)	5,400 (2,449)	6,115 (2,774)*
Gross Vehicle Weight Rating, lbs (kg)	3,500 (1,588)	12,000 (5,443)	12,000 (5,443)
Commercial Warranty**	2 Years	2 Years	2 Years

*pre-production estimate **Engines are warranted separately by manufacturer.

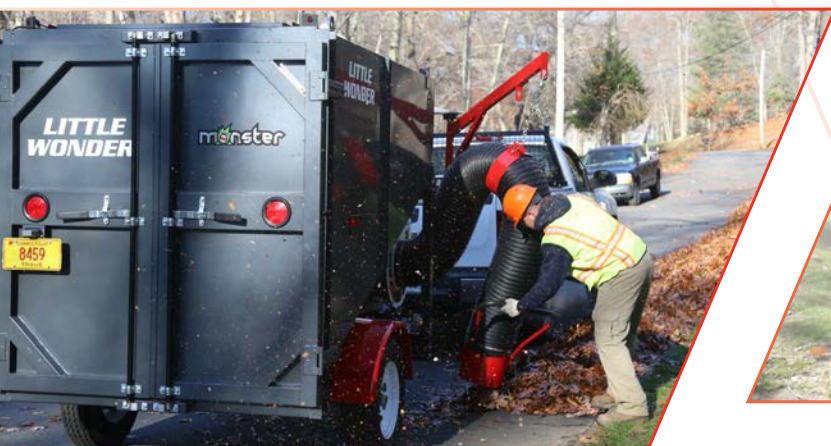


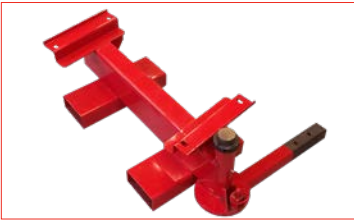

Rotary Arm Mount

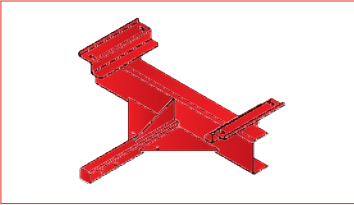

Hitch Mount

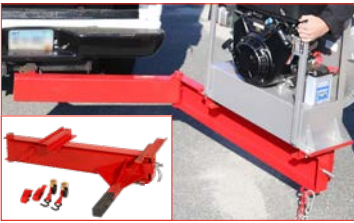

Hitch Mount Swing Arm

MOUNT ACCESSORIES

Item No.	Compatible With:	Description
MP020001.17	8183-04-01	Rotary Arm Mount for 18HP Skid Mount
MP020002.17	8183-04-01	Hitch Mount for 18HP Skid Mount
MP020060.17	8183-04-01	Hitch Mount Swing Arm (included standard on 8184-04-01)

KITS

Product No.	Tow-Behind Models	Description
MP010012	All Models	Safety Kit (2 Orange Cones w/bracket and Wheel Chocks w/ Storage Box)
MP010032		LED Light Kit (2 LED Lights w/bracket and Wiring Harness)



Safety Kit available for all trailer units.



LED Light Kit available for all models.

AGVAC

A faster way to muck out stalls and livestock pens! The Little Wonder AgVac vacuums waste into a self-contained debris loader. The dual-hose manifold lets two stable hands work simultaneously. The fixed dump angle lets gravity help offload waste and bedding into the manure pile or dumpsite. Monstrous power makes cleaning livestock barns and stalls easier. Ask about the 5-Yard on-road and 10-Yard models.



AgVac 5-Yard (82965-04-AV) and AgVac 10-Yard (83560-04-AV) are available as road-ready products

Product No.	82965-04AVS
Engine	Briggs & Stratton® Vanguard™
Engine Power	29HP
Fuel Capacity, gal (l) / Fuel Type	6 (22.7) / Gasoline
Emissions Compliance	EVAP/49-state
Hitch Class Requirements (min)	Class III
Hitch Type, in (cm)	Ball Coupler
Starter	Electric
Impeller Mount / Drive	Taper Lock Hub / Direct
Impeller Diameter, in (cm) / Type	19.75 (50.2) / Straight
Impeller Blades	6 (15.2)
Housing Liners, in (mm)	1/4 (6.3) Steel
Housing Manifold, in (cm)	14 (35.5)
Dual Intake Hose - Flexible D x L	8" (20.3cm) x 15' (4.5m)
Tire/Wheel	ST225/75
Filter Bags	2
Container Type	5-Yard Gravity Dump Trailer
Container Dimensions L x W x H, ft (m)	8 x 5 x 6 (2.4 x 1.5 x 1.8)
Container Dump Angle / Type	65° / Fixed
Container Doors	Double barn doors (rear) w/side-wall door latches
Assembled Dimensions L x W x H, in (cm)	173 x 67 x 88 (440 x 171 x 229)
Dry Weight, lbs (kg)	2,210 (1,003)

CUT BRUSH NOT CORNERS.

HYDRO BRUSH CUTTER

The Little Wonder Hydro Brush Cutter navigates through weeds, heavy brush and overgrown vegetation with ease. Our tempered spring steel 26" blade cuts tall weeds, brush and saplings up to 2" thick. Our welded steel frame design and engine positioning provide excellent balance regardless of the terrain. The hydrostatic transmission offers variable speed selection—up to 4.2 mph forward and 1.7 mph reverse. The open differential allows each wheel to operate at different speeds and prevents scuffing when turning a corner.

- Clear small areas, vacant lots, around barns or buildings
- Clear hilly terrain
- Establish small trails or paths
- Open riding trails
- Clear around ponds
- Perform highway guard rail maintenance
- Clear tinder brush and cut firebreaks in forest area

Product No.	5127-22-01
CE Product No.	5126-22-59
Engine	Honda® GXV390
Displacement (cc)	389
Fuel Capacity, qt (l)	2.2 (2.1)
Starter	Recoil
Max Speed Fwd / Rev, mph (km/h)	4.2 (6.7) / 1.7 (2.7)
Transmission	Hydro-Gear® T2® Transaxle
Transmission Type	Integrated Hydrostatic Pump / Motor
Deck Material	Steel
Cutting Blades / Material Thickness, in (mm)	1 / 0.25 (6.3) Steel
Cutting Width, in (cm)	26 (66)
Cutting Height Min / Max, in (cm)	3 (7.6) / 5 (12.7)
Max Cutting Capacity Diameter, in (cm)	2 (5)
Max Slope Angle	20°
Tires, in (cm)	16 (40.6) Puncture-proof, Bar Tread, Foam-filled
Assembled Dimensions L x W x H, in (cm)	78 x 32 x 41 (198.1 x 81.2 x 104.1)
Dry Weight, lbs (kg)	405 (183.7)

BRUSH CUTTER



Ergonomic control system with forward / reverse and blade engagement levers positioned at handle grips.

Solid rods connect the operator to the transmission and cutter blade clutch—no cables to break or adjust.



Single belt pulley system.



7-, 10- and 12-gauge welded steel engine base, cutting deck, rear frame and control handle construction holds up to the toughest conditions.

16" foam-filled no-flat, puncture-proof bar tread tires for excellent traction and ground clearance on rough terrain. Clean-cornering due to the open differential.

1" diameter mower blade spindle is supported by top and bottom sealed ball bearings inside a machined steel hub.



Tempered spring steel 26" blade cuts tall weeds, brush and saplings up to 2" thick.

Adjustable 1.5" wide, 0.25" plate steel skid shoes provide excellent flotation over rough terrain.

CLEAN, SHARP EDGES. NO SHOVEL NEEDED.

BEDSHAPER®

Ready for edging made easy? Put down the shovel, and start up the Little Wonder BedShaper®. This popular unit features a powerful “concave shape” notched blade to slice through soil, producing clean, sharp edges—even “S” curves—at up to 100’ per minute. Blades are highly resistant to chipping, breaking, bending, and delaminating.

Product No.	904-00-01
Engine	Honda® GXV390
Displacement (cc)	390
Fuel Capacity, qt (l)	2.2 (2.1)
Transmission	Hydrostatic, Variable Speed Control (forward and reverse)
Blade Diameter, in (cm) / Material	16.25 (41.2) / Heat Treated Spring Steel
Bearings	Roller (greaseable)
Frame Material	Steel
Max Cutting Depth, in (cm)	4.5 (11.4)
Depth Adjustment Style	7-Position Gauge Wheel
Tire Size	145 / 70 - 6
Dimensions L x W x H, in (cm)	51 x 43 x 43 (129.5 x 109.2 x 109.2)
Weight, lbs (kg)	365 (166)
Replacement Blade	Item 19233
Optional Shredder Kit	Item 80001SH



To pulverize heavy clumps, include the optional bolt-on Shredder Blades Kit (Item 80001)

Hydro engage/
dump handle
for free wheel
movement.



Self-propelled hydrostatic transmission with powered forward and reverse gets the job done quickly and easily.

Shape-Trak™ design mounts the blade in-line with the drive wheels allowing the blade to follow the precise path.

Zero-turning radius easily cuts even small diameter tree rings.



Cutting depths from 0.5" to 4.5" controlled by a 7-position gauge wheel.

When the notched blade contacts a rock or tree root, the BladeFloat™ allows the arm to “float” over the obstruction while the blade continues to cut.

Spring-loaded belt idler provides maintenance-free operation and is fully enclosed in the frame.

EDGING OUT THE COMPETITION.

PRO EDGER

Designed to produce clean, crisp edges quickly and efficiently—up to 90' per minute—the Little Wonder Pro Edger outperforms all others in the category. This user-friendly unit features fingertip controls for fatigue-free operation and control, making it the edger of choice among landscapers and DIYers.

Product No.	6232-00-01
CE Product No.	6232-00-59
Engine	Honda® GX120
Displacement (cc)	118
Fuel Capacity, qt (l)	3 (2.8)
Drive System	Dual Belt
Steel Blade Diameter, in (cm)	10 (25.4)
Fixed Cutter Head Material	Cast Iron
Max Edging Depth, in (cm)	4 (10.1)
Solid Wheel Diameter, in (cm)	8 (20.3)
Weight, lbs (kg)	69 (32)
Replacement Cutting Blade	Item 129
Wire Wheel Conversion Kit	Item 6020-00-01

Anti-Vibration Grips



Largest available cast iron cutter head on the market.

PRO EDGER FEATURES:

- **Convenient controls** that allow adjustment of cutting depth (up to 4"), belt tension and blade engagement from the operator's position.
- **Dual belt drive** for extra power to the blade and reduced slippage during application.
- **Four wheel design** for extra stability. All wheels have steel hubs with ball bearings and full axles for smoother and easier maneuverability.



10" steel blade is sharpened on all four sides for longer blade life.




Since 1922, professionals have relied upon the performance and long lasting durability of Little Wonder landscaping and debris management equipment. From the production of the world's first hedge trimmer to the aerodynamic redesign of the wheeled blower, we've been changing the product landscape of power equipment. Our complete line of landscaping and debris management equipment—including bedshapers, blowers, edgers, hedge trimmers, lawn and debris vacuums and truckloaders—is available through more than 3,500 power equipment dealerships nationwide. **Clean it up with Little Wonder!**


To learn more about Little Wonder products and locate a dealer or rental shop in your area, visit littlewonder.com


**LITTLE
WONDER®**

1028 Street Road
Southampton, PA 18966
Phone: 215-357-5110
Fax: 215-357-8045
Toll Free: 1-877-596-6337

littlewonder.com

 /LittleWonderEquipment

 /LittleWonderPower

 @LittleWonderEquipment