

**5HP-10HP
Premium
Two Stage**




**5HP-10HP
TWO-STAGE PREMIUM
VERTICAL COMPRESSORS**

Since 1977

**Dual Control: Automatic
and Continuous Run**

Energy efficiency & MAXimum performance

PISTON SERIES

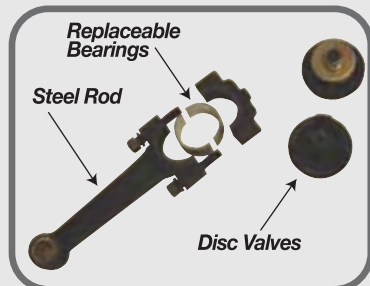

- All Steel Rebuildable Connecting Rods with Disc Valves for easy maintenance & long durability



- Flow-Tek™ Concentric Disc Valves for Maximum Performance & Longevity



- Large Industrial Lincoln Motors, 1750 RPM with High Starting and Running Torque

Contact:



www.EmaxCompressor.com
1000 Cass Drive
Clayton, Ohio 45315
Toll Free: 866-294-4153
Fax: 937-540-1157
sales@emaxcompressor.com



Gate Valve Oil Drain:
Provides quick, clean,
oil changes



**Magnetic
Starter**



**HYUNDAI
POWER PRODUCTS**



Made In The USA

Features & Benefits

- Cool-Tek: The coolest running compressors in the industry - 35% lower operating temperature reduces moisture build up & extends pump life
- Belt Tension Adjuster: Fast, easy "one turn" way to tighten belts which reduces vibration and extends belt life

Model Number

EP05V081H

EP07V080V1

EP10V080V1

EP07V080V3

EP10V080V3

Running HP	5	7.5	10	7.5	10
SCFM @ 175 PSI	17	26	35	26	35
Pump RPM	800	600	800	600	600
Power (Voltage)	208 / 203	208 / 203	208 / 203	208/230/460 380 /575	208/230/460 380 /575
Noise DB (A)	73	73	76	73	76
Tank Size (Gallons)	80	80	80	80	80
Maximum PSI	175	175	175	175	175
Pump Type	Two-Stage	Two-Stage	Two-Stage	Two-Stage	Two-Stage
Outlet	NPT 3/4"	NPT 3/4"	NPT 3/4"	NPT 3/4"	NPT 3/4"
Weight (lbs)	658	908	933	908	933
Dimensions: LxWxH	34" x 24" x 73"	34" x 24" x 73"	34" x 24" x 73"	34" x 24" x 73"	34" x 24" x 73"
Oil Capacity (quarts)	2	2	2	2	2



5YR - Limited Warranty on oil-lubricated air compressor pumps and tanks
2YR - Limited Warranty on all air compressor components



TSVIC09 04/2014