NEW! Wi-Fi Interface Module

(Model UTY-TFNXZ2)

Control your home's climate anytime, anywhere!

















Through the free FGLair app Fujitsu's heating and cooling systems can be controlled using a smartphone or tablet.

USER FRIENDLY INTERFACE

User friendly screen display facilitates easy operation



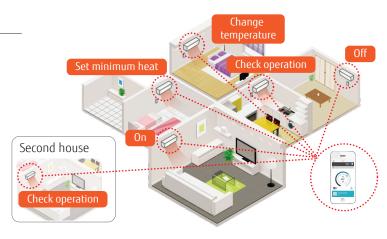


Control up to 24 systems using a single account.

MAIN FUNCTIONS

- ON / OFF
- Operation mode
- Fan speed
- Louver position
- Set temperature control
- Room temperature display Child lock
- Weekly timer
- Minimum heat
- Energy Saving Program
- Error display
- Email notification

SYSTEM DIAGRAM

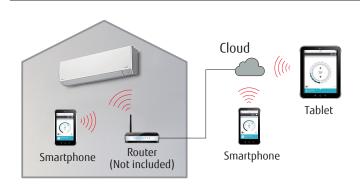


Wireless router

- IEEE802.11b/g/n wireless LAN standard Internet access required, both in your home and on your mobile device(s).

Required Operating System version

- Android OS 4.1 or later
- iOS 8.0 or later

ERROR DISPLAY & E-MAIL NOTIFICATION

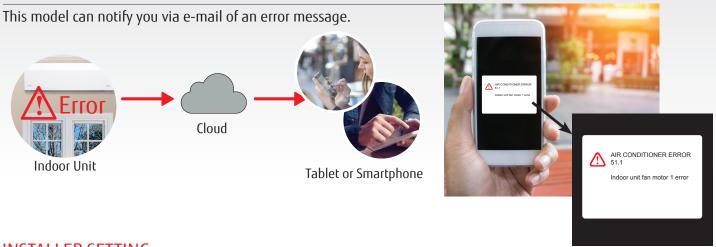

INSTALLER SETTING

This feature offers an easy way for contractors to perform the following settings without leaving the application:

- Initiate Test Run
- Service Contact allows the customer to notify their contractor whenever there is an issue with the system.
- **Function Setting** through an easy-to-use interface, contractors can enter function settings into the system by selecting the desired function and setting value.









iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.

COMPATIBILITY CHART

| Wall Mounted | | Cassette | | Duct | | Floor | |
|--------------------|-----|-----------------------|---|-----------------------|---|-------------------|---|
| ASU30 / 36CLX1 | • | AUU7 / 9 / 12 / 18RLF | • | ARU7 / 9 / 12 / 18RLF | • | AGU9 / 12 / 15RLF | • |
| ASU18 / 24RLB | • | | | | | | |
| ASU30 / 36RLXB | • | | | | | | |
| ASU9 / 12 / 15RLF1 | ●*1 | | | | | | |
| ASU18 / 24RLF | • | | | | | | |
| ASU30RLX | • | | | | | | |
| ASU30RLE | • | | | | | | |
| ASU9 / 12 / 15RLS2 | ●*2 | | | | | | |
| ASU9 / 12 / 15RLS3 | ●*3 | | | | | | |
| ASU7 / 9 / 12RLF | ●*4 | | | | | | |

^{*1} Communication Kit: UTY-XCBXZ2 is required

VRF indoor units are not compatible.

Wired remote control and Wi-Fi INterface Module cannot be used at the same time

Please refer to the installation manual for available function settings.



^{*2} Communication Kit: UTY-TWBXF is required

^{*3} Communication Kit: UTY-TWBXF1 is required

^{*4} Communication Kit: UTY-XCBXZ1 is required