

ELECTRICAL INLETS, OUTLETS

- 120 V, 15 A Inlet (Nema 5-15R)
- 120 V, 20 A Inlet (Nema 5-20P)
- 120 V, 15 A, GFCI, duplex outlet (Nema 5-20R)

ELECTRICAL CONTROLS

- 15/20 A power distribution switch
- 15/20 A main breaker
- 5 A individual floodlight ON-OFF switches

FLOODLIGHTS

- Four 240 W LED fixtures
 - Lm/fixture: 34,800
 - Total lm: 139,200
 - Efficiency: 130 lpw
- Coverage at 0.5 ft-c: 27,600 ft² (2,564 m²)
- IP65 LED modules with 50,000 hour life expectancy
- Individually adjustable light fixtures
- Aluminum and polymer housing
- Enclosure mounted LED drivers
- 30 VDC mast cord and fixture
- Friction disc mounting for tool-free positioning

MAST


- Vertical operation and storage
- Five galvanized steel sections
- Winch: single handle, manual crank
- 340° rotation – adjustable from ground
- Self-retracting, coiled power cord
- Equipped with single lifting eye

CHASSIS


- 49.5 mph (80 km/h) wind rating
- Steel frame with galvanized fork pockets
- Four side forkable
- Four 1,200 lb (544 kg) leveling jacks
- Galvanized, extendable side outriggers – lockable in position for storage
- Steel painted lockable doors
- Individual luminaire ON-OFF switches



Picture shown may not reflect actual configuration.

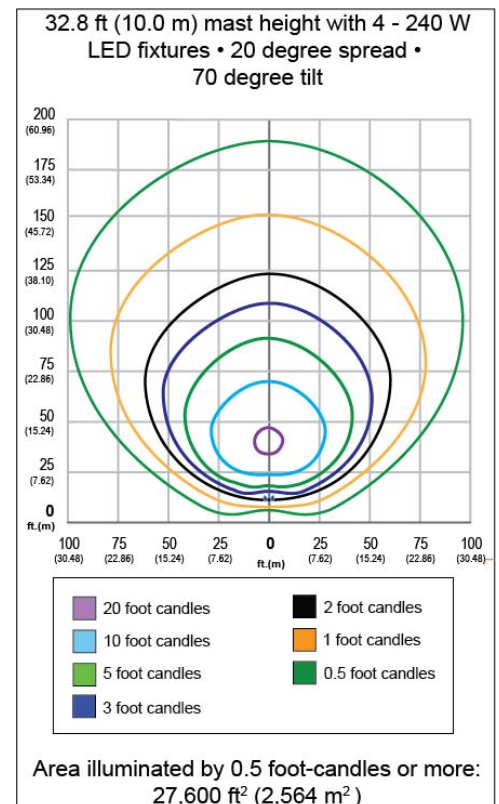

DIMENSIONS

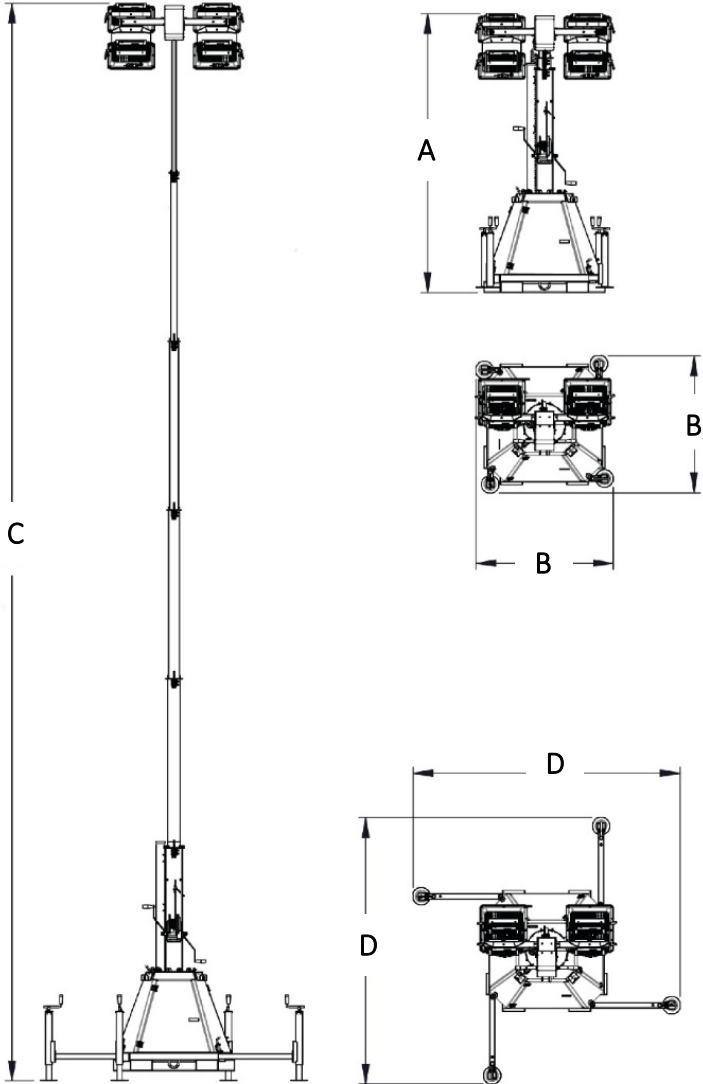

| A | B | C | D |
|------------------|------------------|----------------|------------------|
| 8.3 ft (2.551 m) | 3.6 ft (1.109 m) | 32.8 ft (10 m) | 7.7 ft (2.335 m) |

WEIGHT

- Operating weight: 881.8 lb (400 kg)

WARRANTY

- 2 Years, 2,000 hours

FOR MORE INFORMATION

- Owner’s manual is available at www.generacmobileproducts.com/resources-tools/manuals.