


Boiler Fill Valves

FM Boiler Fill Valves

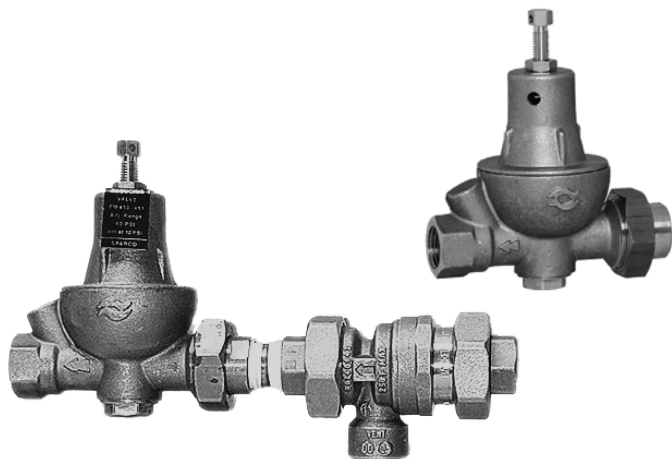

Pressure regulating valve for automatic control of boiler feed water and other pressure reducing applications. Especially constructed for expansion tank mounting.

- Fast fill feature.
- Built in check valve.

Application: Fast fill pressure regulating boiler feed valve with check valve.
Connection Type: NPT
Inlet Connection Size: 1/2 in.
Inlet Connection Type: Sweat or Threaded
Pipe Size: 1/2 in.
Materials (Body): Brass
Maximum Ambient Temperature: 212 F (100 C)

Product Number	Maximum Operating Pressure		Regulating Pressure Range	Dimensions, Approximate	Weight	Description
	(kPa)	(psi)	(psi)	(inch)	(lb)	
FM450	1034 kPa	150 psi	4 psi to 60 psi	4 1/8 in. high x 5 5/16 in. long	1.8 lb	1/2 in. sweat union pressure reducing valve, includes union nut and both sweat and NPT tailpiece
FM911	1034 kPa	150 psi	4 psi to 60 psi	—	4 lb	1/2 in. NPT Backflow preventer and boiler fill valve assembly, includes union nut and both sweat and NPT tailpiece