


patio heater

4000 SERIES

infrasave
radiant heaters

DURABLE LONG-LIFE CONSTRUCTION

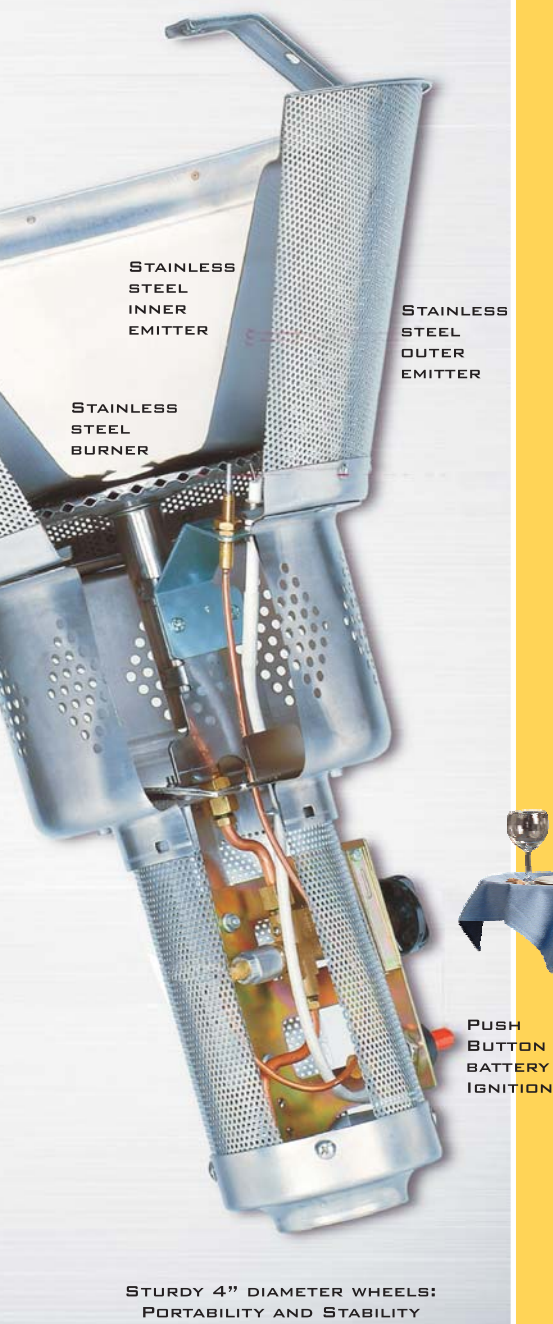

the hot spot.



Cool summer nights.
Chilly fall evenings.
Keep your customers
warm and comfortable
with a patio heater from
InfraSave, the industry
leader.

The portable and post mount parasol style 4000 series provides the ultimate in flexibility on your patio.

Double mantle conical burner:

- Fuel savings of 16%*
- Fewer tank changes save labor
- Better direction of radiant comfort to your patrons.

With four patio heater models in 14 styles and sizes, InfraSave offers a solution to suit every budget and application.

- Fixed mount or portable
- Natural gas or propane
- Industry leading commercial use warranties.

Nothing to hide

* Compared to conventional 46,000 Btuh heaters

4000 Series Specifications



Don't settle for an underperforming infrared heater.

InfraSave's commercial use warranty covers the burner and mantel for a full 3 years.



Overhead, perimeter mount luminous heaters.
23,000, 35,000, 50,000 Btuh



Tube heater Series for patios under roof or canopy.
45,00 to,155,000 Btuh
10 to 40 ft lengths

Portable Model

When portability is mandatory: no mounting surface for fixed mount heaters; city boulevard patio; fuel piping not practical.

Stainless steel or durable powder coat finish.

Large 4 inch wheels for easy portability and extra stability.

Push button battery spark igniter for quick and sure ignition.

Adjustable gas input to suit temperature conditions.



Model No.	Finish	Dimension H x Dia.	BTU/Hr	Gas	Gas Pressure		Gas Inlet	Cylinder	Weight (Lbs.)
					Manifold	Max. Inlet			
4005-CB	Stainless Steel	89 3/4" x 32 1/4"	38,000	LP	11" w.c.	11" w.c.	1/2"	20 or 30 lb.	50
4002-CB	Hammered Black	89 3/4" x 32 1/4"	38,000	LP	11" w.c.	11" w.c.	1/2"	20 or 30 lb.	50

Post Mount Model

Stainless steel or durable powder coat finish.

Deck mount with cover in matching finish.

Piped from central fuels supply..


Push button battery spark igniter for quick and sure ignition.

Adjustable gas input to suit temperature conditions.



Model No.	Finish	Dimension H x Dia.	BTU/Hr	Gas	Gas Pressure		Gas Inlet	Fuel Supply	Weight (Lbs.)
					Manifold	Max. Inlet			
4SN/L5-CB	Stainless Steel	89 3/4" x 32 1/4"	38,000	N = NG	5" w.c.	7" w.c.	1/2"	Hard piped.	50
4BN/L6-CB	Hammered Black	89 3/4" x 32 1/4"	38,000	L = LP	11" w.c.	11" w.c.	1/2"		50

4000 Series patio heaters are designed and certified by CSA International for use outdoors in accordance with current ANSI Standards. *InfraSave warrants that the heater will operate as designed for wind conditions up to 10 MPH.* Please note that adverse wind and weather conditions will reduce the effectiveness of any heating system.



Waynesboro, GA - Mississauga, ON
Phone: 1-877-446-3727
Fax: 1-866-361-0523
www.infrasave.com csr@infrasave.com