


Job Name:

Schedule Reference:

Date:

ENERGY RECOVERY VENTILATOR

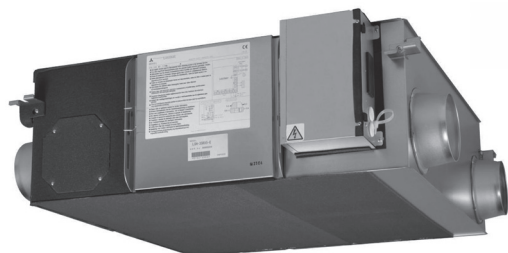

GENERAL FEATURES

- Lossnay® cross-flow energy recovery core
- Minimal cross contamination (<1% overall) between entering and leaving air streams
- Stand-alone control
- M-NET
- External input bypass damper control
- Stand alone or interlocks with all Mitsubishi product

SPECIFICATIONS

Capacity470 CFM / 17 m³/min

Power

Power Source.208 - 230V, 1-Phase, 60 Hz
 Power Consumption 0.120 - 0.538 kW
 Current0.60 - 2.50 A
 Starting Current4.5 A
 Minimum Circuit Ampacity (MCA)..... 3.1 A
 Maximum Overcurrent Protection (MOCP)..... 15 A

Controllers

PZ-60DR Lossnay® Controller: Controls 1-15 Lossnay® units, ON/OFF, Fan Speed, and Vent Mode

Operation Mode

- Heat Recovery
- Bypass
- Auto

Air Volume

(fan speed: extra low - low - high - extra high)
 @ 208V 147 - 330 - 420 - 470 CFM
 @ 230V 177 - 365 - 470 - 470 CFM

Temperature recovery efficiency

(fan speed: extra low - low - high - extra high)
 @ 208V 82 - 74 - 70.5 - 69%
 @ 230V 80 - 72 - 69 - 69%

Enthalpy recovery efficiency

(fan speed: extra low - low - high - extra high)
 Heating
 @ 208V 80 - 70 - 66 - 64 %
 @ 230V 78 - 68 - 64 - 64 %
 Cooling
 @ 208V 69 - 58 - 53 - 51%
 @ 230V 67 - 55 - 51 - 51%

External static pressure (In. W.G.)

(fan speed: extra low - low - high - extra high)
 @ 208V 0.07 - 0.33 - 0.54 - 0.80
 @ 230V 0.09 - 0.40 - 0.66 - 0.96

External FinishGalvanized steel sheet

Dimensions

inches15-3/4 H x 39-1/2 W x 45-1/16 D
 mm 399 H x 1004 W x 1144 D

Net Weight 119 lb / 54 kg

Energy Transfer Lossnay® core

Heat Exchange System Air-to-air
 total heat (sensible heat + latent heat) exchange, no moving parts

Heat Exchange Material Partition, spacing
 plate-cellulose fiber membrane

Blower 9.625 in. dia. centrifugal fan

Motor .. Totally enclosed capacitor permanent split-phase 0.52 HP
 induction motor, 4 poles, 2 units

Filter Washable fiber (2)

Entering Air Temperature Operation Range


14° F to 104° F (-10° C to 40° C), RH 80% or less

Sound Pressure Level

(fan speed: extra low - low - high - extra high)
 @ 208V 18 - 28.5 - 33 - 36 dB (A)
 @ 230V 8.5 - 31 - 35.5 - 38 dB (A)

Notes:

Model: LGH-F470RX5-E1 – DIMENSIONS

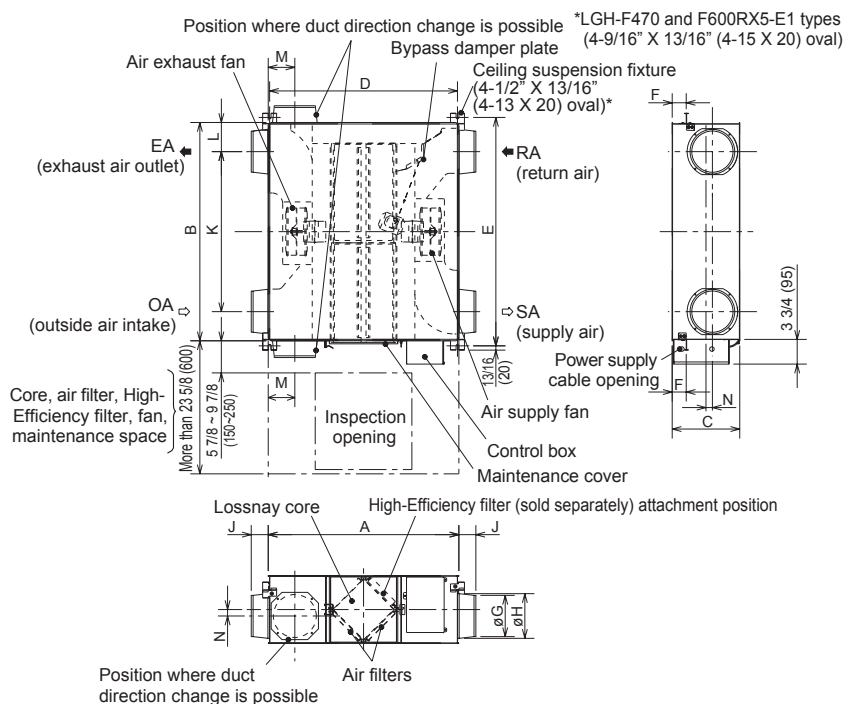

Accessory parts

- Mounting screws x16
- Duct connecting flanges x4 (double flanges at SA and EA sides)
- P-Series - Lossnay connection cable (gray: two wires) x1

Unit: Inch (mm)

Model	Dimensions			Ceiling suspension fixture pitch			Nominal diameter	Duct connecting flange			Duct pitch				Weight
	A	B	C	D	E	F		G	H	J	K	L	M	N	
LGH-F300RX5-E1	34 15/16 (888)	40 (1016)	12 3/8 (315)	34 1/2 (875)	41 7/8 (1063)	2 9/16 (65)	7 7/8 (200)	7 9/16 (192)	8 3/16 (208)	3 1/8 (79)	29 3/8 (745)	5 5/16 (135.5)	4 7/8 (124)	1 3/16 (30)	73 lbs (33 kg)
LGH-F470RX5-E1	45 1/16 (1144)	39 1/2 (1004)	15 3/4 (399)	39 3/4 (1010)	40 13/16 (1036)	15 5/16 (389)	9 7/8 (250)	9 1/2 (242)	10 3/16 (258)	3 1/8 (79)	27 3/16 (690)	6 3/16 (157)	6 1/2 (165)	—	119 lbs (54 kg)
LGH-F600RX5-E1	45 1/16 (1144)	48 1/2 (1231)	15 3/4 (399)	39 3/4 (1010)	49 3/4 (1263)	15 5/16 (389)	9 7/8 (250)	9 1/2 (242)	10 3/16 (258)	3 1/8 (79)	36 1/8 (917)	6 3/16 (157)	6 1/2 (165)	—	132 lbs (60 kg)



Intertek



COOLING & HEATING
Live Better

1340 Satellite Boulevard
Suwanee, GA 30024
Tele: 678-376-2900 • Fax: 800-889-9904
Toll Free: 800-433-4822
www.mehvac.com