


NON-DUCTED:

# of indoor unit	Total Nominal Capacity (x1000)	TTL Indoor unit Capacity	Operational Performance for Indoor Unit Combination (x1000)	IDU1 capacity	IDU2 capacity	Total Input	Operating current (208V)	Operating current (230V)
1	6	6,000	6	6,000	0	540	2.6	2.3
		7,400	6	7,400	0	670	3.3	3.3
1	9	9,000	9	9,000	0	670	3.3	3.0
		11,000	9	11,000	0	905	4.7	4.3
1	12	12,000	12	12,000	0	800	4.5	4.1
		13,600	12	13,600	0	1,240	6.2	5.6
1	15	15,000	15	15,000	0	1,060	6.4	5.8
		18,000	15	18,000	0	1,715	8.9	8.1
2	12	12,000	6 + 6	6,000	6,000	790	3.8	3.4
		14,800	6 + 6	7,400	7,400	1,040	5.1	4.6
2	15	15,000	6 + 9	6,000	9,000	1,035	5.0	4.5
		18,400	6 + 9	7,400	11,000	1,370	6.7	6.1
2	18	18,000	6 + 12	6,000	12,000	1,420	6.8	6.2
		21,000	6 + 12	7,400	13,600	1,640	8.0	7.3
2	18	18,000	9 + 9	9,000	9,000	1,420	6.8	6.2
		21,000	9 + 9	10,500	10,500	1,640	8.0	7.3
2	21	20,000	6 + 15	5,700	14,300	1,635	7.9	7.1
		22,000	6 + 15	6,400	15,600	1,780	8.7	7.9
2	21	20,000	9 + 12	8,600	11,400	1,635	7.9	7.1
		22,000	9 + 12	9,800	12,200	1,780	8.7	7.9
2	24	20,000	9 + 15	7,500	12,500	1,605	7.9	7.0
		22,000	9 + 15	8,300	13,700	1,780	8.7	7.9
2	24	20,000	12 + 12	10,000	10,000	1,605	7.9	7.0
		22,000	12 + 12	11,000	11,000	1,780	8.7	7.9

MXZ-2C20NA2 OPERATIONAL PERFORMANCE

DUCTED:

# of indoor unit	Total Nominal Capacity (x1000)	TTL Indoor unit Capacity	Operational Performance for Indoor Unit Combination (x1000)	IDU1 capacity	IDU2 capacity	Total Input	Operating current (208V)	Operating current (230V)
1	9	9,000	9	9,000	0	750	3.4	3.0
		10,900	9	10,900	0	1,000	4.6	4.2
1	12	12,000	12	12,000	0	1,010	4.5	4.1
		13,600	12	13,600	0	1,260	5.8	5.2

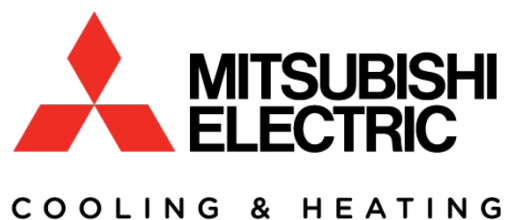

1340 Satellite Boulevard, Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

FORM# MXZ-2C20NA2 OPERATIONAL PERFORMANCE - 201706



Specifications are subject to change without notice.

Copyright © 2017 Mitsubishi Electric US, Inc.