

**PAC-USWHS003-TH-1**  
WIRELESS TEMPERATURE AND HUMIDITY SENSOR FOR KUMO CLOUD™



Job Name:

System Reference:

Date:



**SPECIFICATIONS**

- Dimensions H x W x D:
  - 1-9/16" x 1-9/16" x 21/32"
  - (40 x 40 x 16.5 mm)
- Operational Voltage: 2-3.6 VDC
- Operation Frequency: 2,400-2,483.5 MHz
- Temperature Operating Range: 32-104°F (0-40°C)
- Range: 33 ft (10 m) (unobstructed)
- Weight 1.41 oz (40 g)
- FCC ID: 2AB4P-IB004N PLUS-SHT

**REQUIREMENTS**


- Wireless Interface (PAC-USWHS002-WF-1) connected to kumo station™
- Indoor Unit with CN105 connection
- kumo cloud™ app version 2.6 or later

**ACCESSORIES**

- ☐ kumo station™ (PAC-WHS01HC-E)<sup>1</sup>
- ☐ IT Extender (PAC-WHS01IE-E)<sup>1</sup>

**COMPATIBILITY**

- Compatible only with PAC-USWH002-WF-1

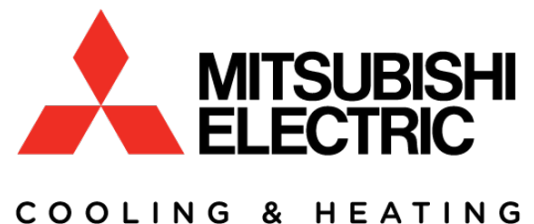

FORM# PAC-USWHS003-TH-1 Wireless Temperature and Humidity  
Sensor for kumo cloud™ - 201709

<sup>1</sup>See Submittal for information on each option.

1340 Satellite Boulevard, Suwanee, GA 30024  
Toll Free: 800-433-4822 [www.mehvac.com](http://www.mehvac.com)

Specifications are subject to change without notice.

Copyright © 2017 Mitsubishi Electric US, Inc.