

Job Name:

System Reference:

Date:



Indoor Unit: PLA-A18BA6

ACCESSORIES:**Indoor Unit**

- ☐ Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- ☐ Condensate Pump (Sauermann SI30-115/230; 115/230V)
- ☐ iSee Corner Panel (PAC-SA1ME-E)
- ☐ Multifunction Casement / MERV 10 Filter (PAC-SH53TM-E / PAC-SH59KF)
- ☐ Air Outlet Plates (PAC-SH51SP-E)

Controls

- ☐ Wireless Controller (MHK1)
- ☐ Advanced Wired Controller (PAR-31MAA)
- ☐ Simple Wired Controller (PAC-YT53CRAU)
- ☐ M-NET Adapter (PAC-SF83MA-E)
- ☐ Temperature Sensor (PAC-SE41TS)

SPECIFICATIONS:**Rated Capacity***

Cooling	Btu/h	18,000
Heating at 47° F	Btu/h	19,000

*Rating Conditions per AHRI Standard:

Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB

Cooling | Outdoor: 95° F (35° C) DB / 75° F (24° C) WB

Heating at 47°F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB

Heating at 47°F | Outdoor: 47° F (8° C) DB / 43° F (6° C) WB

For data on specific indoor units (all ducted, all non-ducted, and both ducted and non-ducted) combinations, see the MXZ Technical and Service Manual.

Electrical Power Requirements

208 / 230V, 1-Phase, 60 Hz

Minimum Circuit Ampacity (MCA)

A

1

Fan Motor (ECM)

F.L.A.

0.51

Fan Motor Output

W

50

Airflow Rate (Low-M1-M2-Hi)

DRY

CFM

420-490-570-640

WET

390-460-530-600

Sound Pressure Level (Low-M1-M2-Hi)

dB(A)

28-29-31-32

External Dimensions (H x W x D)

In.(mm)

10-3/16 x 33-1/16 x 33-1/16
(258 x 840 x 840)**Net Weight (Unit / Grille)**

Lbs.(kg)

49 / 13 (22 / 6)

External Finish

Munsel No. 6.4Y 8.9/0.4

Refrigerant

R410A

Refrigerant Piping (Flared)**Liquid (High Pressure)**

In.(mm)



1/4 (6.35)

Gas (Low Pressure)

1/2 (12.7)

DIMENSION: PLA-A18BA6

Unit : inch(mm)

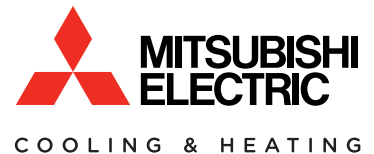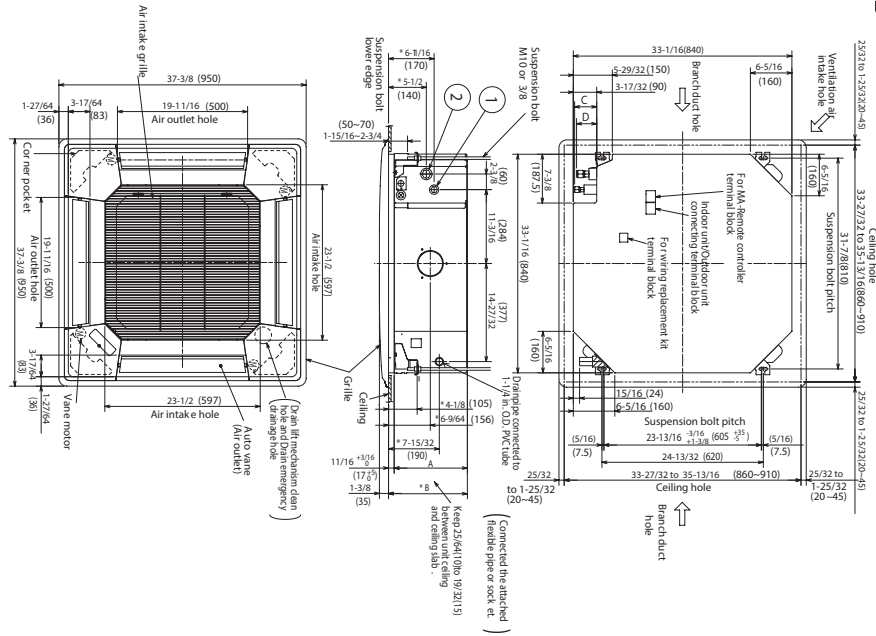

1340 Satellite Boulevard, Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

