

SUBMITTAL DATA: MSZ-GE15NA-8 & MUZ-GE15NA2

15,000 BTU/H WALL-MOUNTED HEAT-PUMP SYSTEMS

Job Name:

System Reference:

Date:



Indoor Unit: MSZ-GE15NA-8



Outdoor Unit: MUZ-GE15NA2

Wireless Remote
Controller


GENERAL FEATURES

- Wall-mounted indoor unit
- Standard Hybrid Catechin Prefilter is included with indoor unit
- Quiet operation
- Auto fan speed control: Quiet, Low, Medium, High, and Super High
- Hand-held Wireless Remote Controller
- Indoor unit powered from outdoor unit using A-Control
- Auto restart following a power outage
- Anti-allergy Enzyme Filter
- Limited warranty: five years parts and seven years compressor

ACCESSORIES

Outdoor Unit

- ☐ Outdoor Mounting Pad (ULTRILITE1)
- ☐ Drain Pan Heater (MAC-640BH-U)
- ☐ 3-1/4" Mounting Base [Pair] (DSD-400P)
- ☐ Drain Pan Socket (MAC-860DS)
- ☐ Air Outlet Guide (MAC-889SG)
- ☐ Wall Mounting Bracket (CWMB1)

Indoor Unit

- ☐ BlueDiamond MaxiBlue Condensate Pump (X87-721, 230V)
- ☐ Sauermann Condensate Pump (SI30-230, 230V)
- ☐ Anti-Allergy Enzyme Filter (MAC-408FT-E)
- ☐ Platinum Catalyst Deodorizing Filter (MAC-308FT-E)
- ☐ Drain Pan Level Sensor (DPLS1)

Controller Options

- ☐ Wireless Wall-mounted Remote Controller Kit (MHK1)*
- ☐ Portable Central Controller (MCCH1)*
- ☐ Outdoor Air Sensor (MOS1)*
- ☐ Wired Wall-mounted Controller (PAR-31MAA requires MAC-333IF)*
- ☐ Simple MA Remote Controller (PAC-YT53CRAU requires MAC-333IF)*
- *See Submittal for information on each option.
- ☐ System Control Interface (MAC-333IF)



SPECIFICATIONS: MSZ-GE15NA-8 & MUZ-GE15NA2

Cooling *1

Rated Capacity.....	14,000 Btu/h
Capacity Range.....	3,100 - 18,200 Btu/h
Rated Total Input	1,080 W
Maximum Total Input	2,000 W
SEER	21.6 Btu/h/W

Heating at 47° F *2

Rated Capacity.....	18,000 Btu/h
Capacity Range.....	4,800 - 20,900 Btu/h
Rated Total Input	1,600 W
Maximum Total Input	2,010 W
HSPF.....	11.2 Btu/h/W

Heating at 17° F *3

Rated Capacity.....	11,300 Btu/h
Max. Capacity	15,900 Btu/h
Rated Total Input	1,150 W
Maximum Total Input	1,950 W

Heating at 5° F

Maximum Capacity.....	13,022 Btu/h
-----------------------	--------------

Rating Conditions:

- *1 Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB
- *1 Cooling | Outdoor: 95° F (35° C) DB / 75° F (24° C) WB
- *2 Heating at 47°F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB
- *2 Heating at 47°F | Outdoor: 47° F (8° C) DB / 43° F (6° C) WB
- *3 Heating at 17° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB
- *3 Heating at 17° F | Outdoor: 17° F (-8° C) DB / 15° F (-9° C) WB
- *4 Heating at 5° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB
- *4 Heating at 5° F | Outdoor: 5° F (-15° C) DB / 5° F (-15° C) WB

Electrical Requirements

Power Supply	208 / 230V, 1-Phase, 60 Hz
Breaker Size	15 A

Voltage

Indoor - Outdoor S1-S2	AC 208 / 230V
Indoor - Outdoor S2-S3	DC +/- 24V
Indoor - Remote Controller	MKH1 DC 3V
	PAR-31MAA DC 12V
	PAC-YT53CRAU DC 12V

Operating Conditions

Cooling

Indoor Intake Air Temp. . . (Max.)	90° F (32° C) DB / 73° F (23° C) WB
	(Min.) 67° F (19° C) DB / 57° F (14° C) WB

Outdoor Intake Air Temp. (Max.)	115° F (46° C) DB
	(Min.) 14° F (-10° C) DB

Heating

Indoor Intake Air Temp. . . (Max.)	80° F (27° C) DB / 67° F (19° C) WB
	(Min.) 70° F (21° C) DB / 60° F (16° C) WB

Outdoor Intake Air Temp. (Max.)	75° F (24° C) DB / 65° F (18° C) WB
	(Min.) -4° F (-20° C) DB / -5° F (-21° C) WB

Indoor Unit

MCA.....	1.0 A
Blower Motor (ECM).....	0.76 F.L.A.
Blower Motor Output.....	30 W

Airflow (Quiet - Lo - Med - Hi - Super Hi)

Cooling	205-272-335-420-533 Dry CFM
	170-237-300-385-498 Wet CFM
Heating	205-247-304-367-463 Dry CFM

Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)

Cooling	26-32-38-44-49 dB(A)
Heating	26-30-35-40-46 dB(A)

External Finish Color	Munsell 1.0Y 9.2/0.2
-----------------------------	----------------------

Dimension Unit

Inches:.....	11-5/8 H x 31-7/16 W x 9-1/8 D
mm:	295 H x 798 W x 232 D

Weight Unit.....	22 lbs. / 10kg
------------------	----------------

Field Drainpipe Size O.D.	19/32" x 15 mm
--------------------------------	----------------

Outdoor Unit

MCA.....	12 A
Fan Motor (ECM).....	0.50 F.L.A.

Sound Pressure Level

Cooling *1.....	49 dB(A)
Heating *2	51 dB(A)

External Finish Color	Munsell 3Y 7.8/1.1
-----------------------------	--------------------

External Dimensions

Inches:.....	21-5/8 H x 31-1/2 W x 11-1/4 D
mm:	550 H x 800 W x 285 D

Weight	80 lbs. / 36kg
--------------	----------------

Refrigerant Type	R410A
------------------------	-------

Refrigerant Pipe

Gas Side O.D.	1/2" x / 12.7mm
Liquid Side O.D.	1/4" / 6.35 mm

Refrigerant Pipe Length

Height Difference (Max.)	40' / 12 m
Length (Max.).....	65' / 20 m

Connection Method


Indoor/Outdoor.....	Flared
---------------------	--------

Notes:

DIMENSIONS: MSZ-GE15NA-8 & MUZ-GE15NA-2


MSZ-GE15NA-8

Unit: inch

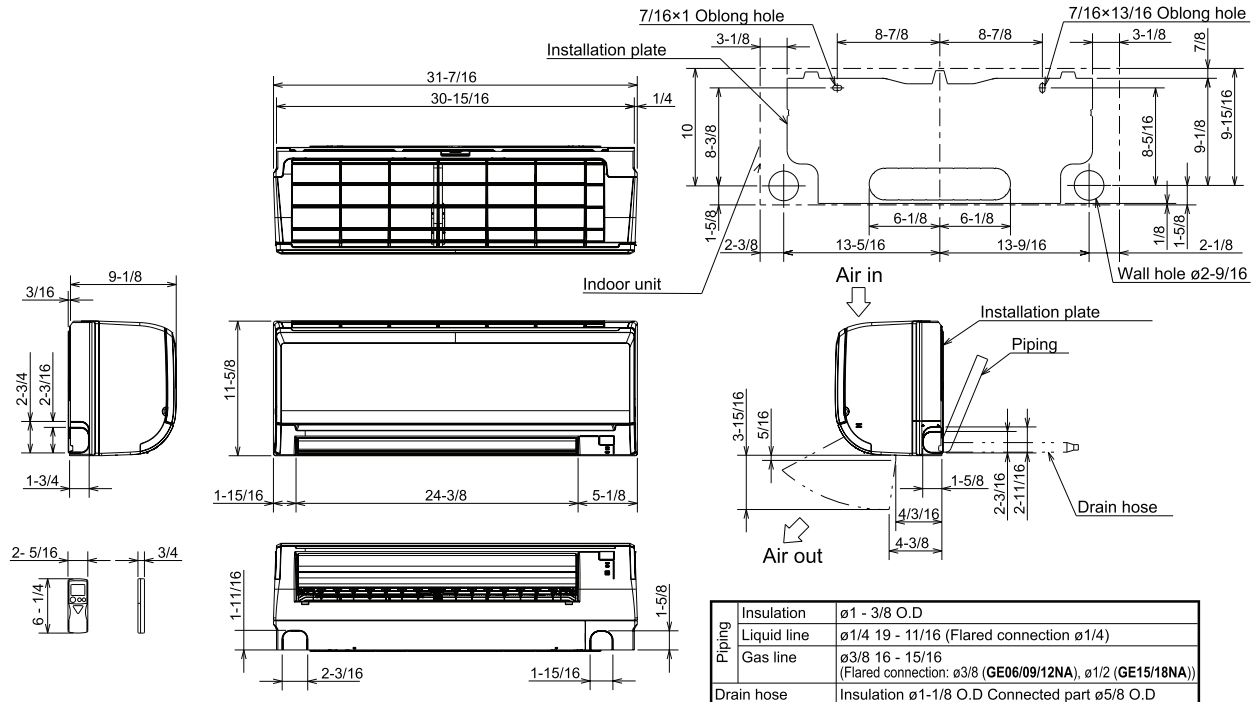


MUZ-GE15NA2

Unit: inch

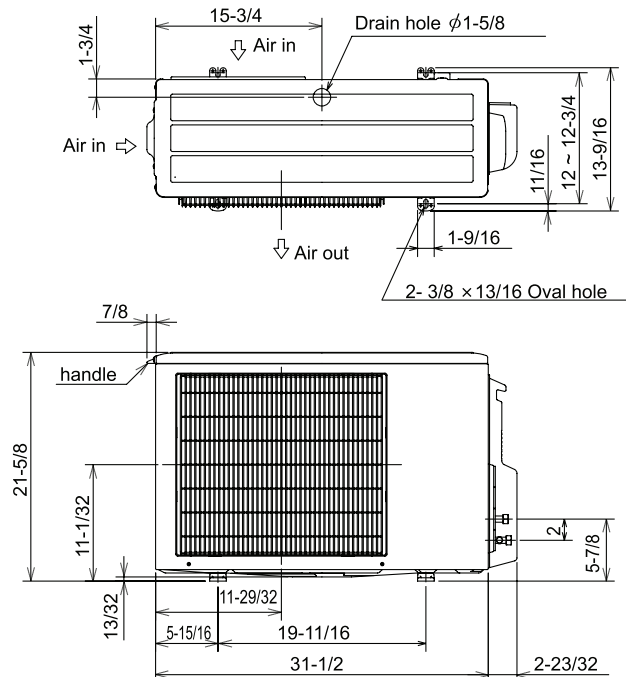


REQUIRED SPACE

*1 4 in. or more when front and sides of the unit are clear

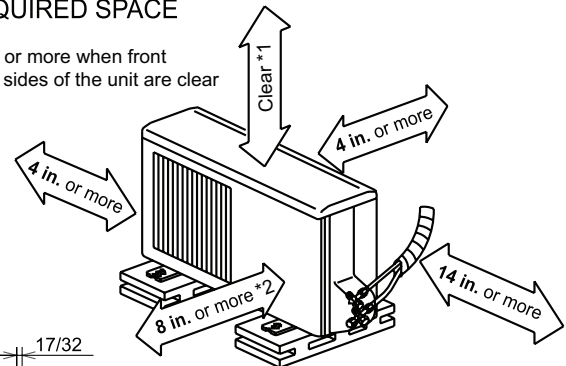

*2 When any 2 sides of left, right and rear of the unit are clear

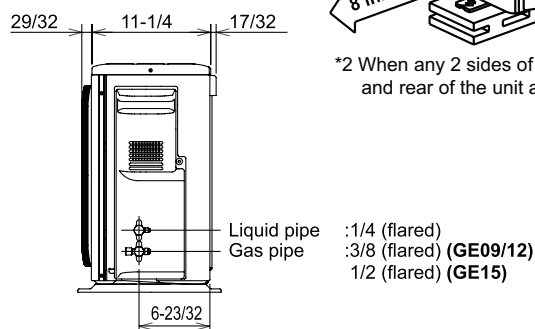

COOLING & HEATING

1340 Satellite Boulevard
Suwanee, GA 30024
Toll Free: 800-433-4822
www.mehvac.com