



# Primary Sump / Effluent Pump - S2050

**S2050 1/2 HP 3600 GPH @ 10'**




Model shown:  
S2050-DFC2

- Cast Iron Construction
- Energy efficient PSC motors
- Cast Iron vortex impeller

\* 4 year warranty is available when purchased and installed by a contractor, otherwise the original 3 year warranty is applicable

## Switch Options Available:

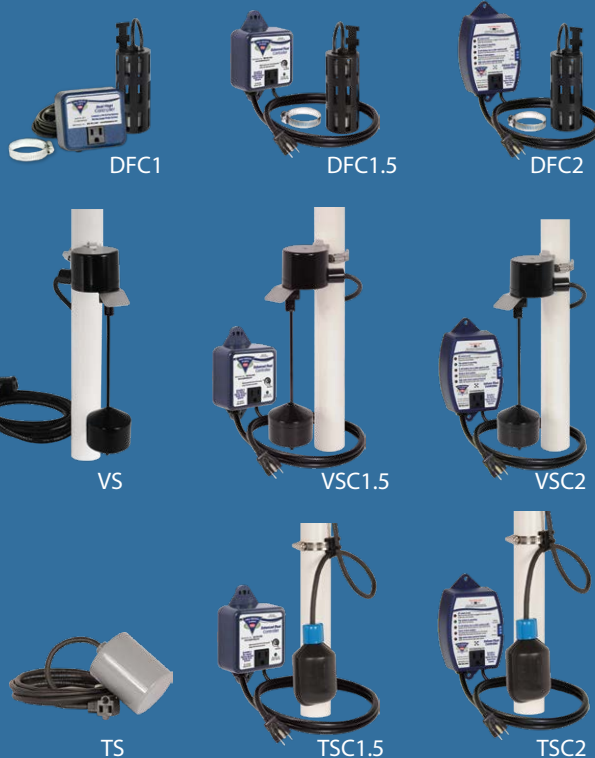

## Models available:

- **S2050-NS** (No Switch - pump only)
- **S2050-DFC1** (Includes Standard Controller with Dual Float Switch)
- **S2050-DFC1.5** (Includes Enhanced Controller with Dual Float Switch)
- **S2050-DFC2** (Includes Deluxe Controller with Dual Float Switch)
- **S2050-VS** (No Controller - pump and Vertical Switch only)
- **S2050-VSC1.5** (Includes Enhanced Controller with Vertical Float Switch)
- **S2050-VSC2** (Includes Deluxe Controller with Vertical Float Switch)
- **S2050-TS** (No Controller - pump and Tether Switch only)
- **S2050-TSC1.5** (Includes Enhanced Controller with Tether Switch)
- **S2050-TSC2** (Includes Deluxe Controller with Tether Switch)

**Industrial Grade for the Residential Market**




**www.StopFlooding.com**

**800-991-0466**

# Primary Sump Pump - S2050

## Pump Features and Construction

- Cast iron construction
- Energy efficient permanent split capacitor (PSC) motor
- Cast iron vortex impeller
- Thermally protected
- Stainless steel fasteners
- Pumps up to 1/2" solids
- Removable strainer
- Upper and lower sealed ball bearings
- Carbon ceramic seal plus (1) Buna-N-Seal
- Cast iron vortex impeller
- 10' Pump cord

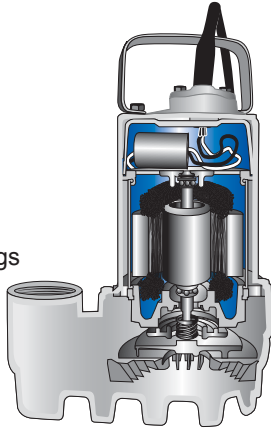

## Specifications and Dimensions

|                         |                         |
|-------------------------|-------------------------|
| Flow @ 0 ft. Head       | 4300 GPH/ 71.6 GPM      |
| Flow @ 10 ft. Head      | 3600 GPH/ 60 GPM        |
| Max Head                | 32 ft. (9.8 m)          |
| Strainer                | Removable Polycarbonate |
| Discharge               | 1.5" (3.8 cm.)          |
| Motor HP/Type           | 1/2 HP - PSC Motor      |
| Voltage                 | 115 VAC, 60 Hz          |
| Amp. Draw @ 10 ft. Head | 6.0 Amps                |
| Width                   | 8.5" (21.6 cm)          |
| Depth                   | 6.5" (16.5 cm)          |
| Height                  | 12" (30.4 cm)           |
| Weight                  | 22 lbs. (9.9 kg)        |

## Mix and Match Ordering

You have flexibility to order any pump with any switch


- **Option 1** - Order a pump and a switch as separate items
- **Option 2** - Order as a pre-packaged system with any switch in a single carton, ready for delivery

## Switches and Controllers Comparison

|   | Standard<br>DFC1 | Enhanced<br>DFC1.5<br>VSC1.5<br>TSC1.5 | Deluxe<br>DFC2<br>VSC2<br>TSC2 |
|---|------------------|--|--------------------------------|
| Available with Dual Float Switch  | •                | •                                      | •                              |
| Available with low voltage Vertical Switch  |                  | •                                      | •                              |
| Available with Tether Switch  |                  | •                                      | •                              |
| Sounds an alarm and alerts when:  |                  |  |                                |
| AC power has failed   |                  |  | •                              |
| Pump or float problem is detected   |                  |  | •                              |
| 9V battery is low or slide switch is off  |                  |  | •                              |
| Remote Notification Connections:<br>(Allows for connection to external devices)                                     |                  |  |                                |
| USB Data Port (Can send specific email, text, or In-App notifications to your phone, tablet or computer)            |                  |  | •                              |
| Remote Terminal (Allows for basic alerts via text, email, In-App, home security, or other dry-contact based device) |                  |  | •                              |
| Float switch can be unplugged from controller for easy installation   |                  | •                                      | •                              |
| System operating light (flashes)  |                  | •                                      | •                              |
| Adjustable run time from 5-45 seconds after the float drops   |                  | •                                      | •                              |
| Activates pump weekly to exercise and extend pump life  |                  | •                                      | •                              |
| Universal controller mounting tabs  |                  | •                                      | •                              |
| 2' power cord   |                  | •                                      |                                |
| 4' power cord   |                  |  | •                              |
| 10' float switch cord   | •                | •                                      | •                              |
| Piggy-back plug   | •                | •                                      | •                              |
| High Water Accessory Available  |                  |  | •                              |

**Includes:** Switch, manual and stainless steel hose clamp

## Flow Chart

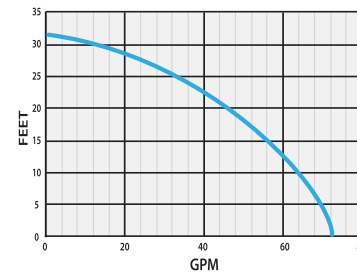

## Why Pro Series Pumps?

### Premium Components

- Designed for higher pumping capacities, increased energy efficiencies, resulting in proven reliability
- Industrial grade, built for the residential market
- PSC motors
- Upper and lower ball bearings

### Energy Savings

- The S2 Series saves an average of \$45 per year (Based on an average sump pump run time of five minutes per hour for one year. The estimated average of a 1/3 HP shaded pole motor is 9.5 Amps. Average electric cost per-kilowatt-hour is \$0.12)

### Exceeding Expectations

- Patented switches and controllers with state-of-the-art monitoring systems
- "Good, Better, Best" offering allows for a wide range of products to best fit your needs

### On the Forefront of Technology

- Many of the models within the PHCC Pro Series line have a USB Data Port and Remote Terminal which allows for connection to an external device that can notify a home owner of a problem or needed maintenance while away from home
- Receive text, email, or in-app notifications while away from home

**Available from:**