


PONDMASTER WATERFALL/SKIMMER PUMPS

PONDMASTER MAGNETIC DRIVE WATERFALL/SKIMMER PUMPS are high capacity pumps designed specifically for use in Skimmers, Waterfalls and Large Pond Installations. These highly efficient units, featuring reliable ceramic bearings deliver up to 3000 GPH; Enough to create a dynamic, attractive waterfall or drive a medium to large size skimmer.

FEATURES

- Designed for Use in Skimmers, Waterfalls and Large Pond Installations
- Powerful, Efficient Magnetic Drive Motor
- Oil-Free / Fish Safe
- Continuous Duty Operation
- Completely Submersible
- Extra-Large, Clog-Resistant Filter Screen
- Back-Flow Check Valve and 1½" Fittings Supplied
- 20' Power Cord with Grounded Plug
- Replacement Impeller Available
- Packed 2 per Master Carton
- 1 Year Limited Warranty

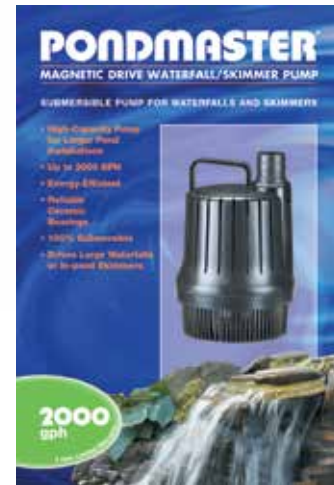


2000 GPH - ITEM# 02650 SUBMERSIBLE WATERFALL PUMP

Max. Flow Rate	2000 GPH
Max. Pumping Height	13'
Max. Watts/Amps	145/2.1
Weight	9 lbs.
Dimensions (L x W x H)	7.5" x 7.5" x 11.25"



3000 GPH - ITEM# 02660 SUBMERSIBLE WATERFALL PUMP

Max. Flow Rate	3000 GPH
Max. Pumping Height	15'
Max. Watts/Amps	250/2.3
Weight	11 lbs.
Dimensions (L x W x H)	7.5" x 7.5" x 11.25"

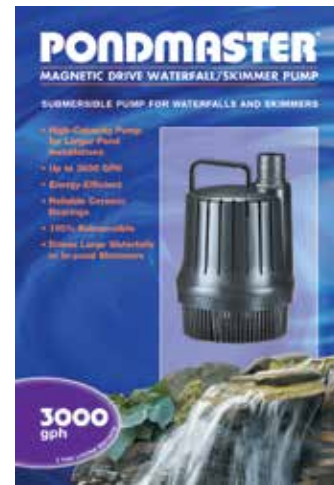

Model	Item #	Watts	Flow at 1'	Flow at 2'	Flow at 3'	Flow at 4'	Flow at 5'	Flow at 6'	Flow at 7'	Flow at 8'	Flow at 9'	Flow at 10'	Shut-Off (Feet)
SWFP 2000	02650	145	1836	1416	1374	1230	1086	1026	942	828	744	654	13'2"
SWFP 3000	02660	250	2022	1938	1866	1782	1644	1560	1470	1356	1242	1110	14'6"

PONDMASTER FOUNTAIN-MAG™ MAGNETIC DRIVE WATER PUMPS

PONDMASTER

THE PONDMASTER FOUNTAIN-MAG™ PUMPS Designed for Fountains, Statuary and Small Ponds with energy-efficient Magnetic Drive Technology. Models 35 and 65 GPH are perfect for table top fountains; Models 65 and 80 GPH are great for small garden fountains, piped statuary and shallow water conditions; Model 190 GPH is suitable for small to medium size fountains, piped statuary and small ponds. Pondmaster Fountain-Mag pumps are a must for any retailer's lineup.

FEATURES

- Built-In Adjustable Flow Control
- Foam Pre-Filter (Not Included in 35 GPH and 65 GPH Models)
- Grounded Power Cords
- Packed 4 Per Master Carton
- 1 Year Limited Warranty on Models 35 GPH Thru 140 GPH
- 5 Year Limited Warranty on Model 190 GPH



MINI 35 GPH ITEM# 02501

Max. Watts/Amps	5.0/0.04
Inlet	NO THREAD
Outlet	½"
Cord Length	6'
Dimensions (L x W x H)	1.9" x 1.4" x 1.69"



For Submersed Use Only

65 GPH FOUNTAIN-MAG ITEM# 02510

Max. Watts/Amps	5.75/0.06
Inlet	NO THREAD
Outlet	5/16" or ½"
Cord Length	6'
Dimensions (L x W x H)	2.5" x 1.8" x 2.8"



For Submersed Use Only

80 GPH FOUNTAIN-MAG ITEM# 02520

Max. Watts/Amps	8.5/0.1
Inlet	NO THREAD
Outlet	3/8" or ½"
Cord Length	6'
Dimensions (L x W x H)	2.9" x 2.2" x 2.7"



For Submersed Use Only

140 GPH FOUNTAIN-MAG ITEM# 02521


Max. Watts/Amps	12.0/0.1
Inlet	NO THREAD
Outlet	3/8" or ½"
Cord Length	6'
Dimensions (L x W x H)	2.9" x 2.2" x 2.7"



For Submersed Use Only

190 GPH FOUNTAIN-MAG ITEM# 02519

Max. Watts/Amps	19.0/0.3
Inlet	3/8" MPT
Outlet	¼"
Cord Length	10'
Dimensions (L x W x H)	2.5" x 1.8" x 2.8"



02519 In-line (without cover)



02519 Submerged (with cover)



PUMPING SPECIFICATIONS									
Model	Item #	Watts	Flow at 1'	Flow at 2'	Flow at 3'	Flow at 4'	Flow at 5'	Flow at 6'	Shut-off (Feet)
35 GPH	02501	5.0	22	-	-	-	-	-	2'
65 GPH	02510	5.75	40	-	-	-	-	-	2'
80 GPH	02520	8.5	45	17	-	-	-	-	2' 6"
140 GPH	02521	12.0	120	80	60	40	30	-	6'
190 GPH	02519	19.0	167	140	125	93	68	34	7'