

Model 0014-IFC® Cartridge Circulator

The 0014-IFC includes an Integral Flow Check, saving installation costs while improving system performance. The removable, spring loaded IFC® replaces a separate in-line flow check and prevents gravity flow when the circulator is not operating. Available in Cast Iron or Stainless Steel construction.



**Low-Lead
Compliant**



Submittal Data # 101-087
Supersedes: 02/06/13

Effective: 05/30/13

Features

- Integral Flow Check (IFC™)
 - Prevents gravity flow
 - Eliminates separate in-line flow check
 - Reduces installed cost, easy to service
 - Improved performance vs. In-line flow checks
- Unique replaceable cartridge-Field serviceable
- Unmatched reliability-Maintenance free
- Quiet, efficient operation
- Direct drive-Low power consumption
- Self lubricating, No mechanical seal
- Standard high capacity output-Compact design
- Wide range of applications
- Cast Iron or Stainless Steel construction, Flanged connections

Materials of Construction

Casing (Volute): Cast Iron or Stainless Steel

Integral Flow Check:

- Body, Plunger..... Acetal
- O-ring Seals..... EPDM
- Spring..... Stainless Steel

Stator Housing: Aluminum

Cartridge: Stainless Steel

Impeller: Non-Metallic

Shaft: Ceramic

Bearings: Carbon

O-Ring & Gaskets: EPDM

Model Nomenclature

F – Cast Iron, Flanged

SF – Stainless Steel, Flanged

IFC – Integral Flow Check

Performance Data

Maximum Flow: 29 GPM

Maximum Head: 23 Feet

Minimum Fluid Temperature: 40°F (4°C)

Maximum Fluid Temperature: 230°F (110°C)

Maximum Working Pressure: 125 psi

Connection Sizes: 3/4", 1", 1-1/4", 1-1/2" Flanged

Certifications & Listings

FOR INDOOR
USE ONLY


Low-Lead Compliant

Application

The 0014-IFC with an Integral Flow Check is designed to reduce installation costs when zoning with 00" circulators on medium head / medium flow hydronic or radiant heating, hydro-air fan coils or closed loop solar heating systems. By locating the removable, spring-loaded IFC inside the pump casing, a separate in-line flow check is eliminated, reducing installation costs. The reduced pressure drop of the IFC, increases the flow performance over in-line check valves. Both the IFC and cartridge are easily accessed for service instead of replacing the entire unit.

Pump Dimensions & Weights


Model	Casing	A		B		C		D		F		G		Ship Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
0014-F1-1 IFC	Cast Iron	7-1/4	184	5-3/4	146	3-1/4	83	3-5/16	84	5-1/2	140	6-1/2	165	13.0	5.9
0014-SF1-IFC	St.Steel	7-1/4	184	5-3/4	146	3-1/4	83	3-5/16	84	5-1/2	140	6-1/2	165	12.0	5.4

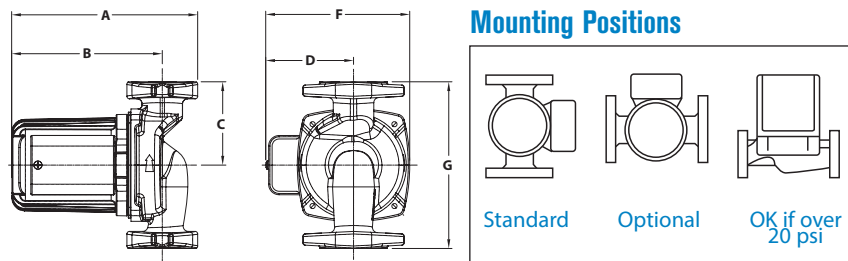

Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
All Models	115	60	1	1.55	3250	1/8
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

Flange Orientation



Performance Field - 60Hz

