

ULTRA DRYING SYSTEMS

Simply plug your air connection into the ball valve inlet located on the Tsunami pre-filters and you're ready to go! The Rove provides your shop with ultimate versatility by having the cleanest, driest compressed air available whenever and wherever needed.


The Rove system incorporates industry leading Tsunami drying technology packaged as a complete system. The systems includes a water separator, oil coalescing filter and automatic float drains to assure proper draining of water, oil and other contaminants. The system is mounted on a 30 gallon receiver tank to provide mobility and storage of clean, dry air.

FEATURES & BENEFITS

- Waterborne Ready!
- Wide track tires provide easy mobility
- Compact design with "lift off" dryer allows for system to be transported and stored anywhere
- Low Relative Humidity - Down to .01% RH
- Easy to read regulator gauges
- Low Dew Points - Down to -80°F
- Easy, Low Cost Maintenance - Under \$100/yr average

Part Number	Port Size	Max Ratings		
		Flow	Pressure	Temperature
21999-0810	1"	40 scfm	175 psi	150°F
21999-0815	1"	60 scfm	175 psi	150°F
21999-0820	1"	80 scfm	175 psi	150°F
21999-0830	1"	120 scfm	175 psi	150°F

- 1 Regenerative Air Dryer
- 2 Pre-Filtration
 - 1st Stage Water Separator
 - 2nd Stage Oil Coalescing Filter
- 3 Automatic Piston Drains
- 4 PLC Control
- 5 80 Gal Receiver Tank
- 6 High Flow Piston Outlet Regulator

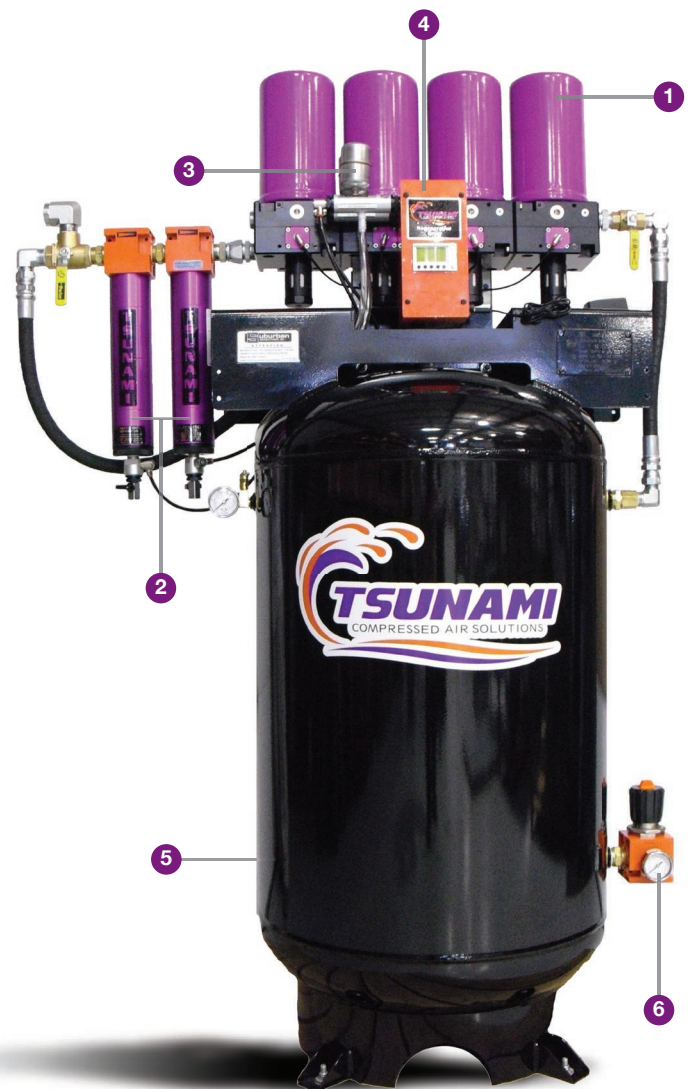

a world-class solutions provider