

### HIGH-FLOW ELECTRIC SUBMERSIBLE TRASH PUMP **HS3.75SL**

*Tsurumi offers a new high-flow version of the best-selling HS3.75S pump!*

**New**




MANUAL  
HS3.75SL



AUTOMATIC  
HSZ3.75SL

Maximum flow rate of **140 GPM** and maximum total dynamic head of **40 feet**.

- ★ Extension of Tsurumi's best-selling HS series submersible trash pumps
- ★ Designed by modifying the impeller and pump casing of HS3.75S for low head and high flow (suffix "L")
- ★ For applications under 10 feet of static head, this can provide double the flow rate of the HS3.75S
- ★ Still features the same wear resistant materials that offer long-term durability
- ★ Still compact and portable with excellent maintainability
- ★ Available as a MANUAL (HS3.75SL) or AUTOMATIC pump (HSZ3.75SL)

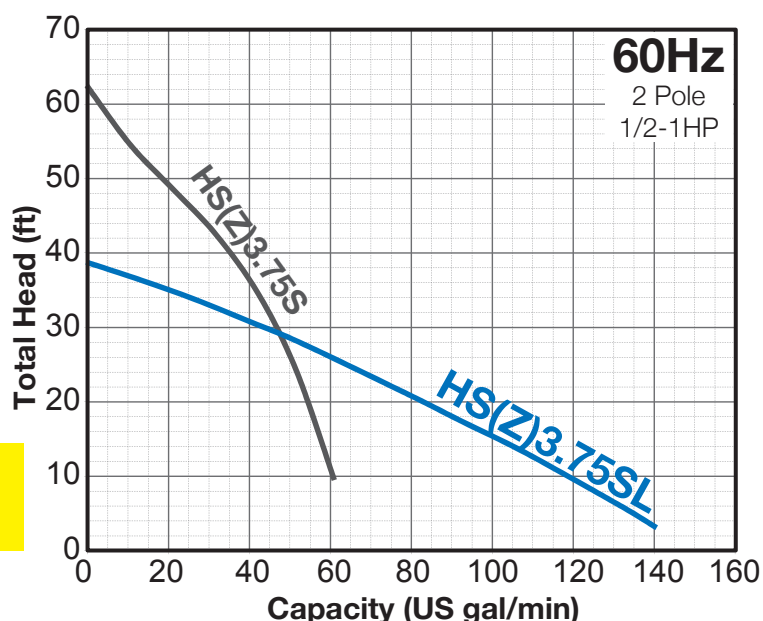

Model	Motor Output (HP)	Phase	Discharge Size (inch)	Cable Length (ft)	Dimension (inch)		Pump Starting Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Height		
HS3.75SL Manual	1	Single	3	32	12 7/16	16 3/4	3 1/2	50
HSZ3.75SL Automatic	1	Single	3	32	12 7/16	18 11/16*	18 11/16**	50

\*Minimum Required Space

\*\*Pump Starting Water Level