

WINCO®

W6010DE

Features

Kohler KD440 Engine

This diesel engine has the reliability and longevity you've come to expect from Kohler.

Low Oil Protection

In the event there is low oil pressure, the engine will shut down, which will protect the engine from damage.

Powder Coat Paint

For an incredibly durable finish.

Sturdy Wrap-Around Welded Tubular Cradle

Redesigned 16 gauge tubular cradle.

LED Indicator Lights

LED lights provide warning indicators for Electric System OK, Low Oil Pressure, and Battery Charging Circuitry.

Premium Square D Circuit Breakers


Providing clear and instant identification of a tripped circuit with a Visi-Trip indicator.

100% Load Tested

You won't find statistical sampling here. We load test every generator before it leaves our facility.

INDUSTRIAL DIESEL

6,010 Surge Watts
5,400 Continuous Watts

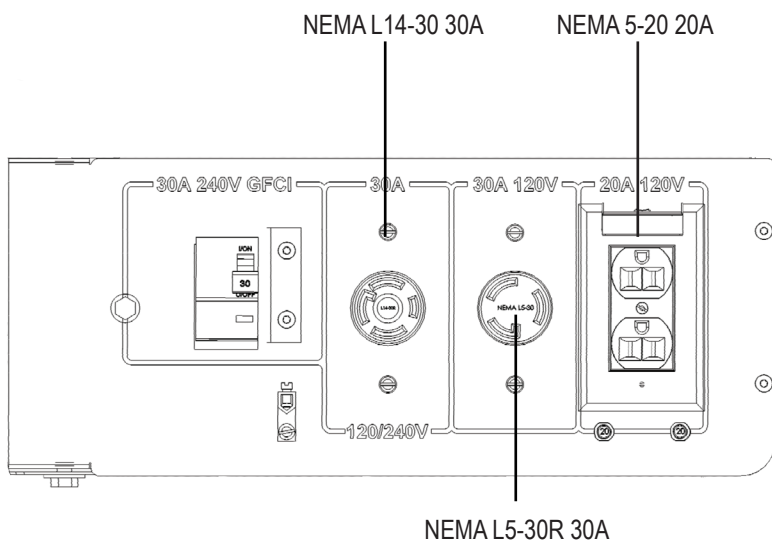

Optional Accessories

Two Wheel, Flat-Free Dolly Kit

Portability is important to get your generator where it needs to be.

Generator Cover

When your generator is not in use, you will want to keep it dust and debris free.

Plug-In Line Voltage Monitor

For when you want to verify the voltage output.

30 Amp (NEMA L14-30P) Plug

You supply the cord you need. We provide the plug.

Maintenance Kit

Keep the engine at its peak performance to ensure the generator will be ready when needed most.

Battery

Interstate Group U1 300 CCA.

GENERATOR

| | |
|-----------------------------------|--|
| ORIGIN | USA |
| SURGE WATTS | 6,010 |
| CONTINUOUS WATTS | 5,400 |
| CONTINUOUS AMPS | 45/22.5 |
| OUTPUT | 120/240 V |
| VOLTAGE REGULATION | CAPACITOR +/-5% |
| FREQUENCY REGULATION | +/-3% |
| MAIN CIRCUIT BREAKER | 30 AMP, 240V (GFCI) |
| BONDED NEUTRAL | YES |
| 120 VOLT RECEPTACLES | (2) NEMA 5-20 20A (GFCI) (1) NEMA L5-30R 30A (GFCI) |
| 120/240 VOLT RECEPTACLES | (1) NEMA L14-30 30A (GFCI) |
| LIFTING EYE | YES |
| 2-WHEEL DOLLY KIT | OPTIONAL |
| PROTECTIVE CRADLE | 1.25" DIA. 16 GAUGE STEEL |
| GENERATOR WARRANTY ⁽¹⁾ | 3 YR COMMERCIAL |

NOTES: (1) For generator warranty information contact your local WINCO service center.


SHIPPING

| | |
|-------------------------|-----------------------------|
| DIMENSIONS (LxWxH) | 34.5" x 24.63" x 23.4" |
| DIMENSIONS W/ WHEEL KIT | 53" x 24.63" x 30.6" |
| NET WEIGHT | 252 LBS |
| SHIPPING DIMENSIONS | 36.375" x 28.375" x 32.375" |
| SHIP WEIGHT | 268 LBS |
| FREIGHT CLASS | 70 |

ENGINE

| | |
|--|---------------------|
| ENGINE BRAND | KOHLER |
| ENGINE MODEL | KD440 |
| ENGINE STARTER | ELECTRIC |
| ENGINE SPEED | 3600 RPM |
| ENGINE CYLINDERS | SINGLE |
| DISPLACEMENT/TYPE | 440 CC / OHV |
| LOW OIL PROTECTION | STANDARD |
| RECOMMENDED OIL ⁽¹⁾ | 10W-30 |
| OIL CAPACITY | 1.6 QT |
| dBA AT 7 METERS | 87.6 |
| FUEL TANK | 7 GAL |
| FUEL GAUGE | YES |
| FULL LOAD RUN TIME ⁽²⁾ | 11.7 HOURS |
| HOUR METER | YES |
| MOTOR STARTING (CODE G) ⁽³⁾ | 2 HP |
| EPA APPROVED | YES |
| CARB APPROVED | YES |
| CSA APPROVED | NO |
| UL LISTED | NO |
| BATTERY SIZE ⁽⁴⁾ | BCI GROUP U1 300CCA |
| ENGINE WARRANTY ⁽⁵⁾ | 3 YR COMMERCIAL |

NOTES: (1) The recommended oil is for normal applications. See operator's manual for the recommended oil for your needs. (2) Run time is estimated. (3) Code G capacitor start motor. (4) Battery not included (5) Contact your local Kohler service center for engine warranty assistance.

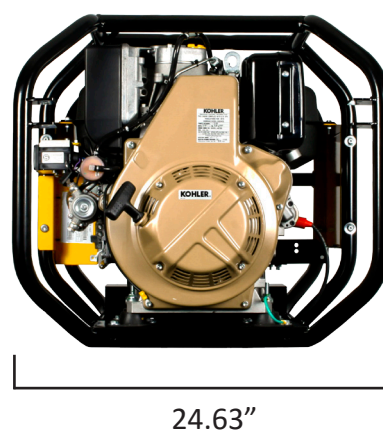

Specifications are subject to change without notice.
225 S. Cordova Ave Le Center MN • 1-800-733-2112 • www.wincogen.com