POWERPROTECTStandby Generators



RESIDENTIAL

Standby Generators



SPECIFICATIONS

OVERVIEW	
Brand	Briggs & Stratton®
Series Name	Power Protect™
Model Name	PP26
Model Number	040806
Rated AC Voltage (Volts)	120 / 240
Frequency (Hz)	60
Generator Breaker (Amps)	125
Operating Ambient Temperature (°C / °F)	-28 - 40 / -20 - 104
Running Amperage, Standby (LP / NG) (Amps)	108.3 / 100
Running Power, Standby (LP / NG) (kW)	26¹ / 24
Power Factor	1.0
Programmable Exercise Cycle	16 sec (default) - 20 mins
Engine	
Engine Brand/Manufacturer	Vanguard®
Model Type	M61
Aspiration	Naturally Aspirated
Speed (RPM)	3600
Displacement (ci/cc)	61 / 993
Compression Ratio	9.7:1
Governor Type	Electronic







Bore & Stroke (mm / in)	Engine	
Valve Arrangement Engine Cylinder Configuration Number of Cylinders 2 Start Type Automatic Frequency Regulation Steady State, No Load to Full Load (%) At Filter Type Dry Low Oil Pressure Switch Engine Oil Heater Rated Temperature (*C /*F) Sound Rating* Low Idlo Mode Sound dB(A) Normal Operating Sound* dB(A) Normal Operating Sound* dB(A) Gi Capacity (ez / L) Gil Epiter (Quantity / Type) Oil Capacity (ez / L) Oil Filter (Quantity / Type) Oil Brand Recommended Oil Electrical System Ignition System Variable Timing Battery Quantity 1 Battery CA (Ampa) Battery Grouping Size Starter Motor Voltage (VDC) 12 Full System	Bore & Stroke (mm / in)	85.5 x 86.5 / 3.37 x 3.41
Engine Cylinder Configuration Number of Cylinders 2 Start Type Automatic Frequency Regulation Steady State, No Load to Full Load (%) Ar Filter Type Dry Low Oil Pressure Switch Engine Oil Heater Rated Temperature (*C /*F) Sound Rating* Low Idle Mode Sound dB(A) Rormal Operating Sound* dB(A) Rormal Operating Sound* dB(A) Gi Capacity (ez / L) Oil Capacity (ez / L) Oil Filter (Quantity / Type) Oil Brand Schaeffer Recommended Oil Electrical System Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) Battery CA (Ampa) Battery Grouping Size Starter Motor Voltage (VDC) 12 Fuel System	Cylinder Block	Aluminum with Cast Iron Sleeve
Start Type Automatic Frequency Regulation Steady State, No Load to Full Load (%) Air Filter Type Dry Low Oil Pressure Switch Pegine Oil Heater Rated Temperature (*C / *F) Sound Rating Low Idle Mode Sound dB(A) Rormal Operating Sound* dB(A) Lubrication System Type Full Pressure Oil Capacity (oz / L) Oil Filter (Quantity / Type) Oil Brand Recommended Oil Electrical System Variable Timing Battery Quantity In Battery Quantity In Battery CCA (Amps) Battery Grouping Size Starter Motor Voltage (VDC) It2 Fuel System	Valve Arrangement	OHV
Start Type Prequency Regulation Steady State, No Load to Full Load (%) Air Filter Type Dry Low Oil Pressure Switch Engine Oil Heater Rated Temperature (*C / *F) Sound Rating* Low Idle Mode Sound dB(A) Normal Operating Sound* dB(A) 45 Lubrication System Type Full Pressure Oil Capacity (oz / L) Oil Filter (Quantity / Type) Oil Brand Schaeffer Recommended Oil Electrical System Variable Timing Battery Quantity 1 Battery Voltage (VDC) Battery CCA (Amps) Battery Grouping Size Starter Motor Voltage (VDC) 12 Fuel System	Engine Cylinder Configuration	V
Frequency Regulation Steady State, No Load to Full Load (%) Air Filter Type Low Oil Pressure Switch Engine Oil Heater Rated Temperature (*C / *F) Sound Reting* Low Idle Mode Sound dB(A) Normal Operating Sound* dB(A) 63 Normal Operating Sound* dB(A) 65 Lubrication System Type Full Pressure Oil Capacity (oz / L) 78 / 2.31 Oil Filter (Quantity / Type) 1 / Cartridge Oil Brand Schaeffer Recommended Oil Electrical System Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) Battery Grouping Size 26 or 51 Starter Motor Voltage (VDC) 12 Fuel System	Number of Cylinders	2
No Load to Full Load (%) Air Filter Type Dry Low oil Pressure Switch Engine Oil Heater Rated Temperature (*C /*F) Sound Rating* Low Idle Mode Sound dB(A) Normal Operating Sound* dB(A) 155 Lubrication System Type Full Pressure Oil Capacity (oz / L) Oil Filter (Quantity / Type) Oil Brand Recommended Oil Electrical System Ignition System Variable Timing Battery Voltage (VDC) Battery CCA (Amps) Battery Grouping Size Starter Motor Voltage (VDC) 12 Fuel System	Start Type	Automatic
Low Oil Pressure Switch Engine Oil Heater Rated Temperature ("C / "F) Sound Rating! Low Idle Mode Sound dB(A) Normal Operating Sound² dB(A) Engine Oil Heater Type Full Pressure Oil Capacity (oz / L) Oil Filter (Quantity / Type) Oil Brand Schaeffer Recommended Oil Electrical System Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) Battery Grouping Size Starter Motor Voltage (VDC) Full System Varial System 12 Full Pressure Optional 63 Normal Operating Sound² dB(A) 65 Lubrication System Full Pressure Oil Capacity (oz / L) 78 / 2.31 Oil Filter (Quantity / Type) 1 / Cartridge Oil Brand Schaeffer Full Pressure Oil Capacity (oz / L) 1 / Cartridge Oil Brand Schaeffer Full Pressure Oil Capacity (oz / L) 1 / Cartridge Oil Brand Schaeffer Full Pressure Oil Capacity (oz / L) 1 / Cartridge Oil Brand Schaeffer Full Pressure Oil Capacity (oz / L) 1 / Cartridge Oil Brand Schaeffer Full Pressure Oil Capacity (oz / L) 1 / Cartridge Oil Brand Schaeffer Full Pressure Oil Capacity (oz / L) 1 / Cartridge Oil Brand Schaeffer Full Pressure Oil Capacity (oz / L) 1 / Cartridge Oil Brand Schaeffer Full Pressure Oil Capacity (oz / L) 1 / Cartridge Oil Capacity (oz / L) Oil Filter (oz / L) 1 / Cartridge Oil Capacity (oz / L) Oil Filter (oz / L) 1 / Cartridge Oil Capacity (oz / L) Oil Filter (oz / L) Oi		+/- 1.0
Engine Oil Heater Rated Temperature (°C / °F) 25 / 77 Sound Rating² Low Idle Mode Sound dB(A) 63 Normal Operating Sound² dB(A) 65 Lubrication System Type Full Pressure Oil Capacity (oz / L) 78 / 2.31 Oil Filter (Quantity / Type) 1 / Cartridge Oil Brand Schaeffer Recommended Oil Electrical System Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) Battery Grouping Size Starter Motor Voltage (VDC) 12 Fuel System	Air Filter Type	Dry
Rated Temperature ("C / "F) Sound Rating" Low Idle Mode Sound dB(A) Normal Operating Sound* dB(A) 65 Lubrication System Type Full Pressure Oil Capacity (oz / L) Oil Filter (Quantity / Type) 1 / Cartridge Oil Brand Schaeffer Recommended Oil Electrical System Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) Battery Grouping Size Starter Motor Voltage (VDC) Full System	Low Oil Pressure Switch	Yes
Sound Rating* Low Idle Mode Sound dB(A) Normal Operating Sound* dB(A) Lubrication System Type Full Pressure Oil Capacity (oz / L) 78 / 2.31 Oil Filter (Quantity / Type) 1 / Cartridge Oil Brand Schaeffer Recommended Oil Electrical System Ignition System Ignition System Sattery Quantity 1 Battery Quantity 1 Battery CCA (Amps) Starter Motor Voltage (VDC) Fuel System Full Pressure Full Pressure 17 / Cartridge 5 / 2.31 1 / Cartridge 5 / Wariable Timing 1 / Cartridge 1 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 5 / Cartridge 1 / Cartridge 5 / Cartridge 6 / Cartridge 5 / Cartridge 5 / Cartridge 5 / Cartridge 5 / Cartridge 6 / Cartridge 5 / Cartridge 6 / Cartridge 5 / Cartridge 6 / Cartridge 7 / Cartridge 8 / Cartridge 7 / Cartridge 8 / Cartridge 7 / Cartridge 8 / Cartridge 9 / Cartridge 1 / C	Engine Oil Heater	Optional
Low Idle Mode Sound dB(A) Normal Operating Sound² dB(A) Lubrication System Type Full Pressure Oil Capacity (oz / L) Oil Filter (Quantity / Type) 1 / Cartridge Oil Brand Schaeffer Recommended Oil Electrical System Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) Battery Grouping Size Starter Motor Voltage (VDC) Fuel System	Rated Temperature (°C / °F)	25 / 77
Normal Operating Sound² dB(A) Lubrication System Type Full Pressure Oil Capacity (oz / L) 78 / 2.31 Oil Filter (Quantity / Type) 1 / Cartridge Oil Brand Schaeffer Recommended Oil 5W30 Full Synthetic Electrical System Ignition System Variable Timing Battery Quantity 1 Battery CCA (Amps) 540 Battery Grouping Size 26 or 51 Starter Motor Voltage (VDC) 12 Fuel System	Sound Rating ²	
Type Full Pressure Oil Capacity (oz / L) 78 / 2.31 Oil Filter (Quantity / Type) 1 / Cartridge Oil Brand Schaeffer Recommended Oil 5W30 Full Synthetic Electrical System Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) 12 Battery CCA (Amps) 540 Battery Grouping Size 26 or 51 Starter Motor Voltage (VDC) 12 Fuel System	Low Idle Mode Sound dB(A)	63
Type Full Pressure Oil Capacity (oz / L) 78 / 2.31 Oil Filter (Quantity / Type) 1 / Cartridge Oil Brand Schaeffer Recommended Oil 5W30 Full Synthetic Electrical System Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) 12 Battery CCA (Amps) 540 Battery Grouping Size 26 or 51 Starter Motor Voltage (VDC) 12 Fuel System	Normal Operating Sound ² dB(A)	65
Oil Capacity (oz / L) Oil Filter (Quantity / Type) 1 / Cartridge Oil Brand Schaeffer Recommended Oil 5W30 Full Synthetic Electrical System Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) 12 Battery CCA (Amps) Battery Grouping Size Starter Motor Voltage (VDC) 12 Fuel System	Lubrication System	
Oil Filter (Quantity / Type) Oil Brand Schaeffer Recommended Oil Electrical System Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) Battery CCA (Amps) Battery Grouping Size Starter Motor Voltage (VDC) 12 Fuel System	Туре	Full Pressure
Oil Brand Schaeffer Recommended Oil 5W30 Full Synthetic Electrical System Variable Timing Battery Quantity 1 Battery Voltage (VDC) 12 Battery CCA (Amps) 540 Battery Grouping Size 26 or 51 Starter Motor Voltage (VDC) 12 Fuel System	Oil Capacity (oz / L)	78 / 2.31
Recommended Oil 5W30 Full Synthetic Electrical System Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) 12 Battery CCA (Amps) 540 Battery Grouping Size 26 or 51 Starter Motor Voltage (VDC) 12 Fuel System	Oil Filter (Quantity / Type)	1 / Cartridge
Electrical System Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) 12 Battery CCA (Amps) 540 Battery Grouping Size 26 or 51 Starter Motor Voltage (VDC) 12 Fuel System	Oil Brand	Schaeffer
Ignition System Variable Timing Battery Quantity 1 Battery Voltage (VDC) 12 Battery CCA (Amps) 540 Battery Grouping Size 26 or 51 Starter Motor Voltage (VDC) 12 Fuel System	Recommended Oil	5W30 Full Synthetic
Battery Quantity 1 Battery Voltage (VDC) 12 Battery CCA (Amps) 540 Battery Grouping Size 26 or 51 Starter Motor Voltage (VDC) 12 Fuel System	Electrical System	
Battery Voltage (VDC) Battery CCA (Amps) 540 Battery Grouping Size 26 or 51 Starter Motor Voltage (VDC) 12 Fuel System	Ignition System	Variable Timing
Battery CCA (Amps) 540 Battery Grouping Size 26 or 51 Starter Motor Voltage (VDC) 12 Fuel System	Battery Quantity	1
Battery Grouping Size 26 or 51 Starter Motor Voltage (VDC) 12 Fuel System	Battery Voltage (VDC)	12
Starter Motor Voltage (VDC) Fuel System	Battery CCA (Amps)	540
Fuel System	Battery Grouping Size	26 or 51
	Starter Motor Voltage (VDC)	12
Fuel Type NG / LPV	Fuel System	
	Fuel Type	NG / LPV
Fuel Supply Line Inlet 3/4" NPT		3/4" NPT
Recommended Fuel, Lower Heating Value Minimum (MJ/m³ / BTU/ft³) NG: 34.3 / 904 LPV: 87.1 / 2338		
Fuel Supply Pressure (mbar / in H2O) NG: 9-17 / 3.5-7 LPV: 28-34 / 11-14	Fuel Supply Pressure (mbar / in H2O)	





Fuel Consumption ³	
No Load, NG (BTU/hr)	122,000
No Load, NG (ft³/hr)	122
Half Load, NG (BTU/hr)	206,000
Half Load, NG (ft³/hr)	206
Full Load, NG (BTU/hr)	323,000
Full Load, NG (ft³/hr)	323
No Load, LP (BTU/hr)	123,000
No Load, LP (ft³/hr)	49
No Load, LP (gal/hr)	1.40
Half Load, LP (BTU/hr)	235,000
Half Load, LP (ft³/hr)	94
Half Load, LP (gal/hr)	2.60
Full Load, LP (BTU/hr)	427,000
Full Load, LP (ft³/hr)	171
Full Load, LP (gal/hr)	4.70
Alternator Specifications	
Alternator Type	Self-Excited, Rotating Field
Alternator Manufacturer	Briggs & Stratton
Frequency (Hz)	60
Phase	1
Insulation Rating (Class)	н
Designed Temperature Rise (°C)	125
Bearing (Quantity / Type)	1 / Sealed
Number of Poles	2
Voltage Regulator	Brushed / Electronic
Motor Starting Capability (kVA)	65.5 (35% Voltage Dip)
Total Harmonic Distortion (THD), NL to FL (%)	< 5
Controls/Instrumentation	
Controller	GC-1032
Charger	Stand Alone
Starting	AMF or 2-wire
LED Digital Display	Yes
Alternator Frequency	Yes
Real Time Clock	Yes
Engine Hour Counter	Yes
Engine Runtime Scheduler	Yes









Controls/Instrumentation	
Low Oil Pressure Shutdown	Yes
High Temperature Shutdown	Yes
Fault Code Display	Yes
Other Features	
Battery Rack and Cables	Yes
Fuel Solenoid Valve	Yes
Integral Vibration Isolation	Yes
Oil Drain Extension	Yes
Operation and Installation Manual(s)	Yes
Enclosure	Aluminum
Enclosure Wind Speed Rating (mph)	186
Accessories	
Maintenance Kit	6872
Oil Warmer	6840
Fuel Regulator Warmer	6845
Surge Protector	6631
UPS	6581
InfoHub™ Universal - Cellular	6574
Limited Warranty⁴	
Warranty: Generator, Domestic & Canada (Parts / Labor / Travel) — Years	7
Warranty: Enclosure, Surface Rust and Corrosion (Parts / Labor / Travel) — Years	1
Warranty: Enclosure, Rust Through (Parts / Labor / Travel) — Years	3
Certifications	
UL	Yes
cUL	Yes
CE	No
Massachusetts Plumbers and Gasfitters Listing	Yes





Weights & Dimensions	
Assembled Dimensions (Length x Width x Height) (in / mm)	46.5 x 26.8 x 28.4 / 1181 x 681 x 721
Assembled Weight (lbs / kg)	540 / 245
Packaged Dimensions (Length x Width x Height) (in / mm)	48.8 x 30.5 x 50.5 / 1240 x 775 x 1283
Packaged Weight (lbs / kg)	625 / 285
Outline and Pad Layout Drawing	80104089

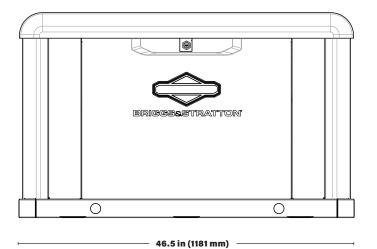

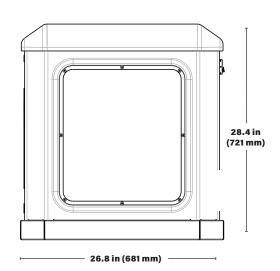





- ¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motor and generators).
- ² Per ISO 3744. Sound level measurement at other locations around generator may differ depending on installation, based on lowest microphone at 7m. Normal operation based on average household usage.
- ³ Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances fuel flow rates may vary depending on these factors.
- ⁴ See operator's manual or energy.briggsandstratton.com for complete warranty details.

BRIGGS & STRATTON POST OFFICE BOX 702 MILWAUKEE, WI 53201 USA