

Job Name/Location:

Tag #:

Date:

For:	File	Resubmit
	Approval	Other

PO No.:

Architect: _____ GC: _____

Engr: _____ Mech: _____

Rep: _____
(Company) (Project Manager)



LS180HFV3

Single Zone Standard Efficiency Wall Mount

Outdoor Unit (ODU) - LSU180HFV3, Indoor Unit (IDU) - LSN180HFV3

Performance:

Cooling:

Cooling Capacity (Min~Rated~Max) (Btu/h)	3,685 ~ 18,000 ~ 18,493
SEER	17.00
EER	10.91

SEER - Seasonal Energy Efficiency Ratio EER - Energy Efficiency Ratio

Heating:

Heating Capacity (Min~Rated~Max) (Btu/h)	3,685 ~ 19,000 ~ 22,997
Max. Heating @ Indoor 70°F DB Outdoor 19°F DB / 17°F WB	15,270
HSPF	9.0

HSPF - Heating Seasonal Performance Factor

Cooling Nominal Test Conditions:

Indoor: 80°F DB / 67°F WB
Outdoor: 95°F DB / 75°F WB

Heating Nominal Test Conditions:

Indoor: 70°F DB / 60°F WB
Outdoor: 47°F DB / 43°F WB

Electrical:

Power Supply (V~/Hz/Ø)	208-230 / 60 / 1
------------------------	------------------

Outdoor Unit:

MOP (A)	20
MCA (A)	15
Cooling Rated Amps (A)	10.4
Heating Rated Amps (A)	10.4
Compressor (A)	10.0
Fan Motor (A)	0.4

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity

Total Power Input:

Cooling Power Input (kW)	1.65
Heating Power Input (kW)	1.74

Piping:

Liquid Line (in., O.D.)	1/4
Vapor Line (in., O.D.)	1/2
Additional Refrigerant (oz./ft.)	0.26
Min. / Max. Pipe Length (ft.) ²	9.8 / 65.6
Piping Length (no add'l refrig., ft.)	24.6
Max. Elevation (ft.)	32.8

Features:

- 24-Hour on/off timer
- 2-Way (up / down) auto swing
- Auto changeover
- Auto restart
- Jet cool/let heat
- Condensate sensor connection
- Energy saving
- Inverter (variable speed compressor)
- Self-cleaning indoor coil
- Sleep mode
- Ultra quiet operation

Included Accessories:

- Wireless Remote Controller — AKB74955602

Optional Accessories:

- MultiSITE™ CRC1 — PREMTBVC0
- MultiSITE CRC1+ — PREMTBVC1
- Simple Remote Controller — PREMTCC00U
- Premium Remote Controller — PREMTA000
- Dry Contact - PDRYCB100/320/400

For a complete list of available accessories, contact your LG representative.

For continual product development, LG reserves the right to change specifications without notice.

© LG Electronics U.S.A., Inc., Englewood Cliffs, NJ. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. /www.lghvac.com

Operating Range:

Outdoor Unit:

Cooling (°F DB)	14 to 118
Heating (°F WB)	14 to 65

Indoor Unit:

Cooling (°F WB)	53 to 75
Heating (°F DB)	60 to 86

System Data:

Refrigerant Type	R410A
Refrigerant Control	EEV
Refrigerant Charge (lbs.)	2.975
ODU Sound Pressure (Cooling / Heating) (±1 dB[A]) ³	55 / 55
IDU Sound Pressure Cooling (H/M/L/Sleep) (±1 dB[A]) ³	48 / 43 / 38 / 32
Heating (H/M/L) (±1 dB[A]) ³	48 / 43 / 38 / 32
ODU Net / Shipping Weight (lbs.)	98.1 / 108
IDU Net / Shipping Weight (lbs.)	26 / 30
Heat Exchanger Coating	GoldFin™

Fan:

ODU Type	Propeller
IDU Type	Cross Flow
Fan Speeds (Fan/Cool/Heat)	6 / 6 / 6
Quantity (ODU + IDU)	1 + 1
Motor/Drive	Brushless Digitally Controlled/Direct
ODU Max. Air Flow Rate (CFM)	1,730
IDU Air Flow Cooling, Max/H/M/L (CFM)	689 / 512 / 459 / 371
Heating, Max/H/M/L (CFM)	653 / 565 / 477 / 388
Dehumidification (pts./hr.)	3.38

Notes:

1. Acceptable operating voltage: 187V-253V.
2. Piping lengths are equivalent.
3. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745.
4. All communication / connection (power) cable from the outdoor unit to the indoor unit is field supplied and must be a minimum of four-conductor, 14 AWG, stranded, shielded or unshielded (if shielded, it must be grounded to the chassis of the outdoor unit only), and must comply with applicable local and national codes.
5. See Engineering Manual for sensible and latent capacities.
6. Power wiring cable size must comply with the applicable local and national code.
7. The indoor unit comes with a dry helium charge.
8. This data is rated 0 ft. above sea level, with 24.6 ft. of refrigerant line and a 0 ft. level difference between outdoor and indoor units.
9. Must follow installation instructions in the applicable LG installation manual.



LS180HFV3

Single Zone Standard Efficiency Wall Mount


Outdoor Unit (ODU) - LSU180HFV3, Indoor Unit (IDU) - LSN180HFV3



Tag No.: _____

Date: _____

PO No.: _____

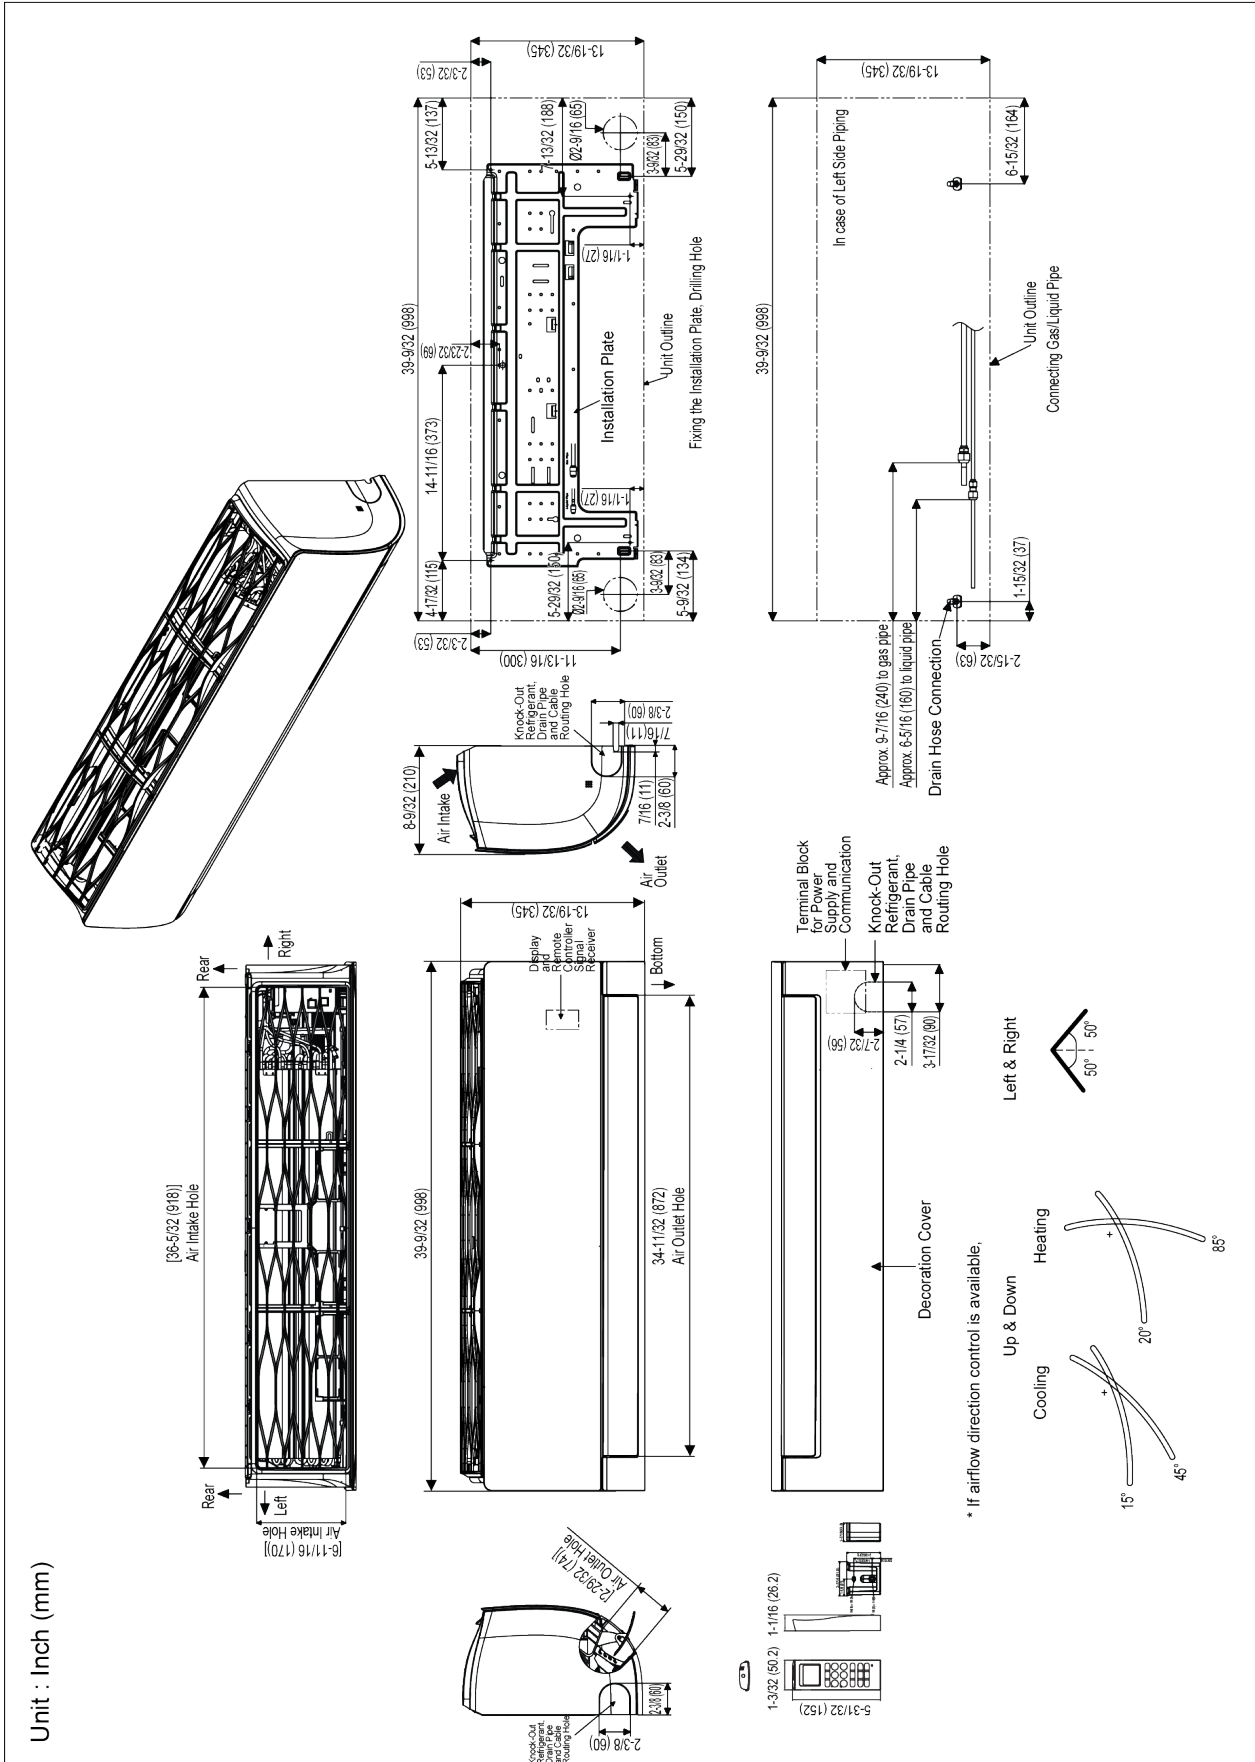

LS180HFV3

Single Zone Standard Efficiency Wall Mount

Outdoor Unit (ODU) - LSU180HFV3, Indoor Unit (IDU) - LSN180HFV3



Tag No.: _____

Date: _____

PO No.: _____

