

# PFP-9HPHND-M-TWIN

## HONDA POWERED PUMP

*The Goliath model is a compact pump that delivers amazing pressure performance so as to meet the needs of several applications.*

*Also available in skid version*



## ENGINE SPECIFICATIONS

- GX270 Honda air cooled engine
- Single cylinder, 4-stroke gasoline engine
- Manual recoil start
- 1.4 gallon (5.3 l) integrated fuel tank

## PUMP UNIT SPECIFICATIONS

- C.E.T. dual stage centrifugal pump
- Pump body made from aluminum
- Aluminum impeller
- Mechanical shaft seal
- Self priming system
- Two 1" (25 mm) delivery outlets and one 1 1/2" (38 mm) NPSH delivery outlet
- One 1 1/2" (38 mm) NPSH suction inlet
- Dimensions (approx.): Length: 20" (508 mm) Width: 17" (432 mm); Height: 17" (432 mm)
- Wet weight : 105 lbs (48 kg)


## INCLUDED ACCESSORIES

- Low oil alert

## PERFORMANCE

**70 GPM @ 10 PSI**  
**60 GPM @ 50 PSI**

**55 GPM @ 100 PSI**  
**40 GPM @ 125 PSI**

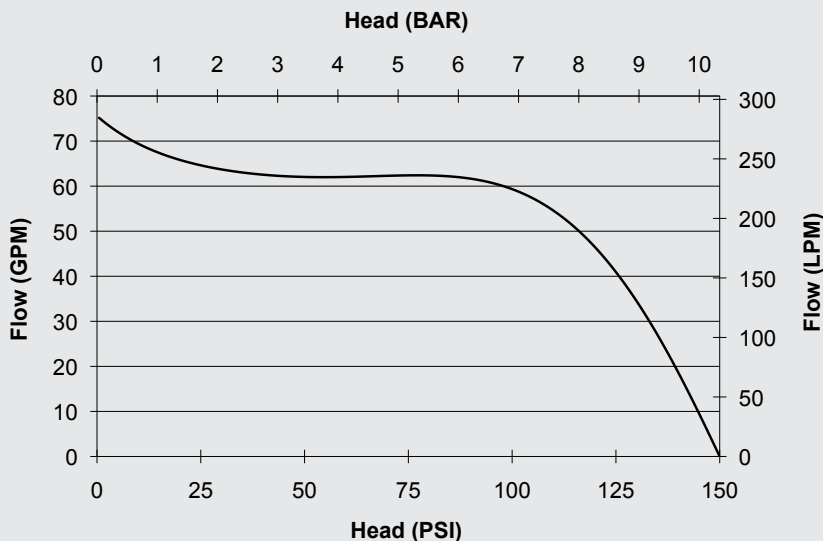

## LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,  
Pierreville (Québec)  
Canada J0G 1J0  
Phone : 1-800-567-2719  
Fax : 1-800-434-2613  
[www.fire-pumps.com](http://www.fire-pumps.com)