

Shallow Well Jet Pumps

- **Shallow well jet pump**
Ideal for use in pumping at depths of 25'
- **Heavy-duty cast iron construction**
For years of service and reliability
- **Includes factory pre-set 30/50 pressure switch**
Produces up to 50 PSI with automatic shut-off
- **115 volt heavy-duty motor**
TEFC design with simple connection to existing power source

JP5EC

Item No. 14942111



| Model | HP | Intake | Discharge | Volts | Depth To Water | Discharge Pressure (PSI)Max | | | | | Max Pressure | Head |
|-------|-----|---------|-----------|-------|-------------------|-----------------------------|-----|-----|-----|----|-----------------|------|
| | | | | | | 20 | 30 | 40 | 50 | 60 | | |
| | | | | | | Gallons Per Minute | | | | | | |
| JP5EC | 1/2 | 1" FNPT | 1" FNPT | 115 | 5' | 8.4 | 6.5 | 3.7 | 1.3 | - | 58.9 | 136' |
| | | | | | 15' | 7.1 | 5.2 | 3.0 | 1.0 | - | 55.0 | 127' |
| | | | | | 25' | 3.5 | 3.4 | 2.0 | - | - | 50.2 | 116' |

- **Shallow well jet pump**
Ideal for use in pumping at depths of 25' or less for 3/4 HP and 20' or less for 1/2 HP
- **Reinforced engineered thermoplastic construction**
Corrosion and rust resistant
- **Includes factory pre-set 30/50 pressure switch**
Produces up to 50 PSI with automatic shut-off
- **115/230 volt heavy-duty motor**
Voltage selector for simple connection to existing power source


JP7P

Item No. 14942105



JP5P

Item No. 14942100

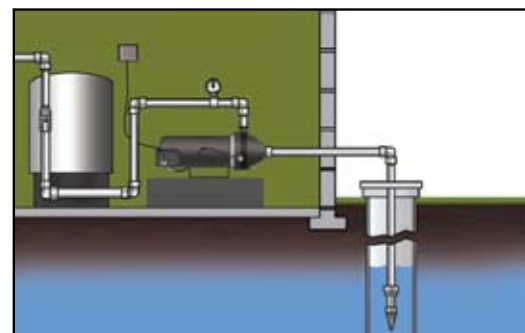

| Model | HP | Intake | Discharge | Volts | Depth To Water | Discharge Pressure (PSI) | | | | | | | Max Pressure | Head |
|-------|-----|-------------|-----------|---------|-------------------|--------------------------|------|------|------|------|-----|-----|-----------------|------|
| | | | | | | 30 | 35 | 40 | 45 | 50 | 55 | 60 | | |
| | | | | | | Gallons Per Minute | | | | | | | | |
| JP7P | 3/4 | 1-1/4" FNPT | 1" FNPT | 115/230 | 5' | - | 16 | 14.4 | 12.6 | 10.6 | 8.3 | 5.0 | 68 | 157 |
| | | | | | 10' | - | - | 13.5 | 11.8 | 9.7 | 6.9 | 3.6 | 65 | 150 |
| | | | | | 15' | - | - | - | 11.0 | 8.8 | 5.4 | 2.2 | 63 | 145 |
| | | | | | 20' | - | - | - | 9.0 | 7.2 | 3.9 | 0.8 | 60 | 138 |
| | | | | | 25' | - | - | - | - | 5.6 | 2.3 | - | 58 | 134 |
| JP5P | 1/2 | 1-1/4" FNPT | 1" FNPT | 115/230 | 5' | 12 | 10.7 | 9.1 | 7.2 | 4.9 | 2.8 | 0.9 | 62 | 143 |
| | | | | | 10' | - | 10 | 8.4 | 6.3 | 3.9 | 1.9 | - | 60 | 138 |
| | | | | | 15' | - | - | 7.7 | 5.3 | 3.0 | 0.9 | - | 57 | 131 |
| | | | | | 20' | - | - | 6.4 | 4.3 | 2.2 | 0.2 | - | 55 | 127 |