

Specifications

Engine	Please refer to the Engine Owner's Manual for Engine-specifications.
Tire Size	12.5" Pneumatic
Handle Bars	Height adjustable to 32.2", 36.1" and 39.1" (w/tools)
Brake	Disc w/ locking feature
Diameter	4" Disc
Clutch	Centrifugal
Engagement speed	1900 RPMs
Frame	Welded 12 ga steel construction
Cutter Head Belt	V-Belt: BP48 49.3" OD, 47.3" ID
Traction Drive Belt	V-Belt: 3L X 39
Construction	Wrapped for abrasion resistance
Cutting Head	Rotary 8 Tooth
Cutting Head Size	1.75" Wide (kerf) X 10.5" Diameter
Cutting Teeth	Replaceable Carbide Tipped (three position)
Machine Dimensions	28" W x 55" L x 39" H* - *center Handlebar position
Weight	207 lbs

Compare the contents with the "Parts Supplied" list below. If you have any questions please contact us at www.DRpower.com or call 1-800-DR-OWNER (376-9637) for assistance.

Parts Supplied in Parts Box (Figure 3):

Item#	Part #	Description	Qty
1	39226	Cable, Brake	1
2	11214	Cable Tie, 7-1/2"	8
3	11075	Nut, Nylon Lock, 3/8-16	2
4	11241	Washers, Flat, 5/16", USS	6
5	15043	Bolt, HHCS, 3/8-16 x 1-1/4", GR5	4

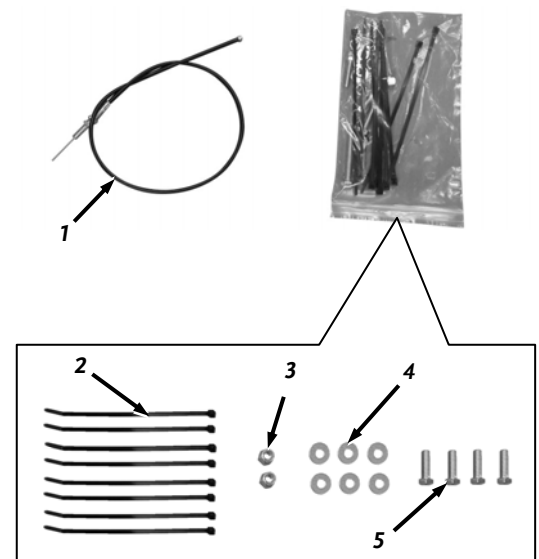


Figure 3