

Specifications

Engine	DR Power Equipment R225
Ft-lbs Torque	9.59
Starting	Manual
RPM	3800
Impeller	Steel, 5 Blades w/Serrated Teeth
Weight	13.2 Lbs
Mount	Direct Mount on Tapered Engine Shaft
Vacuum	2038 CFM
Suction	66 MPH
Hose	8" ID x .035" Wall PVC, 72" L
Collector	Over-center Tilt Design w/ Flatbed Base
Volume	27 Cuft, 200 Gallons
Capacity	400 Lbs
Fabric Enclosure	1800 Denier Polyester, Solution Dyed, Bonded PVC Backing
Dump Tilt	55°
Base	Flatbed, Steel
Frame	Welded Steel, 2 Piece Modular Design
Impeller Housing	Steel Scroll (.12" Thick), Sideplate (.12" Thick)
Wheels	Pneumatic 5.30/4.50-8 4 Ply w/ Tube
Quantity	2 (1 Per Side)
Tire Size	14" Diameter x 4.5" Wide
Jack	Optional Accessory
Lawn Mower	12 HP Min Flat Terrain otherwise 14 HP
Lawn Mower Hitch	Pin Hitch 8" to 15" from the Ground
Dimensions	87.8" L x 40.1" W x 52.6" H
Weight	230 Lbs

Assembly Parts Identification

Compare the contents of the Shipping Box with the Parts Supplied lists and Figures 2 thru 7 below. If there are any questions contact us at www.DRpower.com or call 1-800-DR-OWNER (376-9637).

Parts supplied in Shipping Box (Figure 2):

Item #	Part #	Description	Qty
1	388581	Chute, Impeller Outlet	1
2	351981	Coupling	1
3	342481	Cuff, Hose, 8"	1
4	337971	Clamp, Hose, 8", Thumbscrew	1
5	337961	Clamp, Hose, 8", LH Bridge	4
6	337951	Hose, 8"ID x 72" Long, PVC	1
7	388541	Enclosure, Fabric	1
7	388441	Tube, Collector	2
9	342441	Rod, Support Hose	1
10	388661	Batten, FRP, .58" X .12" X 29.4"	4
11	338011	Axle	1
12	388521	Tube Frame, Top Rear	1
13	388511	Tube Frame, Top Front	1
14	337941	Wheel & Tire, 14X 5.3/4.50-8, 4 Ply	2

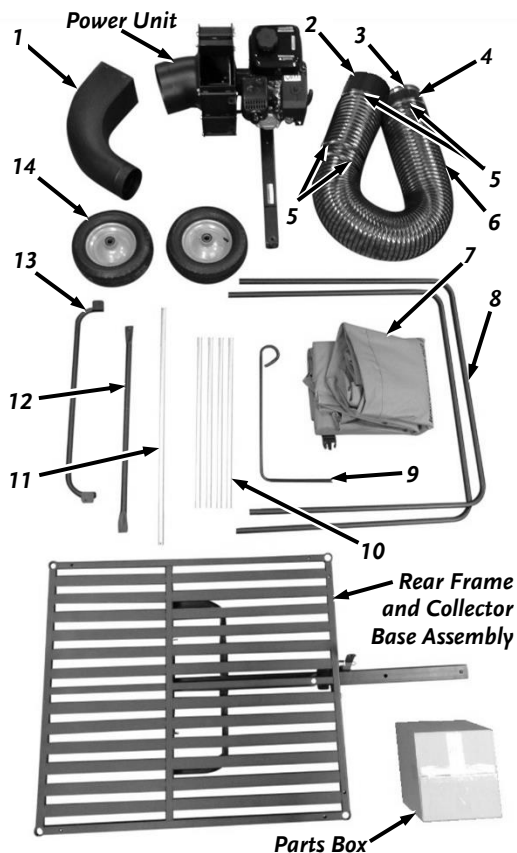


Figure 2