



TWO STAGE HORIZONTAL
5HP-10HP Industrial Compressors

All options below are included.

PISTON SERIES

- Quiet, low RPM Solid Cast Iron construction for extended life - up to 50,000 hours*



Ram-Tek: Solid Steel, heavy gauge rods for maximum performance & durability



Belt Tension Adjuster: Fast, easy "one turn" design reduces vibration and extends belt life



Auto Tank Drain eliminates daily maintenance

Contact:



www.EmaxCompressor.com
1000 Cass Drive
Clayton, Ohio 45315
Toll Free: 866-294-4153
Fax: 937-540-1150
sales@emaxcompressor.com




Energy efficiency & MAXimum performance

Since 1977



Dual Control: Automatic and Continuous Run

Gate Valve Oil Drain: Provides quick, clean, oil changes

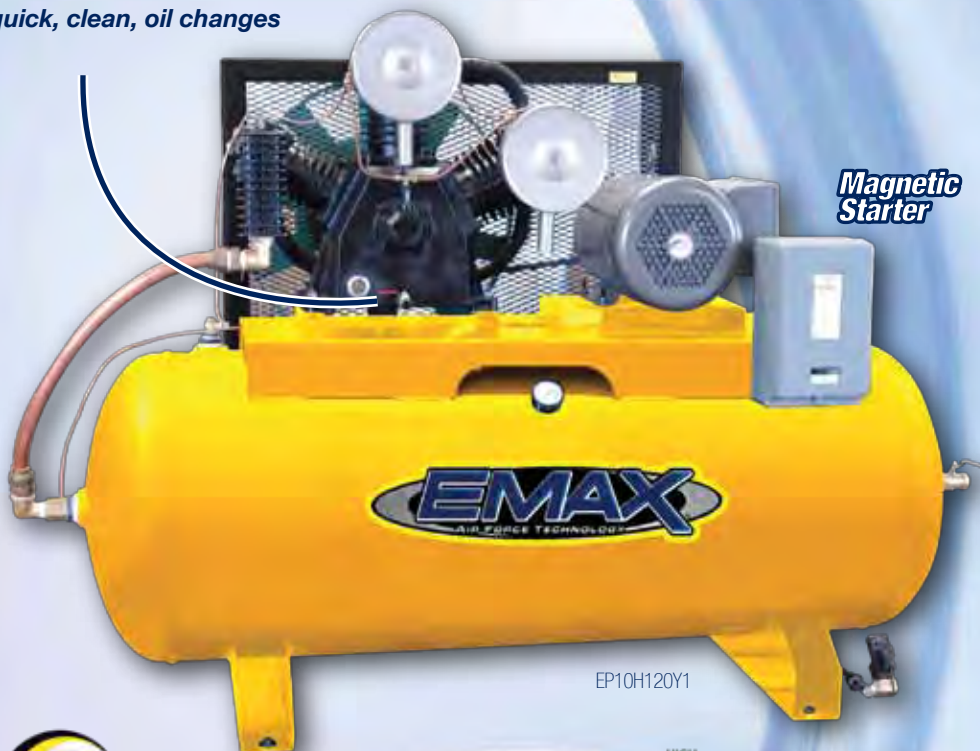

Magnetic Starter

EP10H120Y1



** Made In The USA

Features & Benefits

- **Cool-Tek:** The coolest running compressors in the industry - 35% lower operating temperature reduces moisture build up & extends pump life
- **Flow-Tek:** Concentric Disc Valves deliver maximum air flow and reliability with low replacement costs

Model	EP05H0801	EP07H080V1	EP10H120Y1	EP07H080V3	EP10H120Y3
Running HP	5	7.5	10	7.5	10
SCFM	17	26	35	26	35
Pump RPM	650	640	600	640	600
Power (Voltage)	208/230	208/230	208/230	208/230/460/575	208/230/460/575
Noise DB(A)	73	73	76	73	76
Tank size (Gallons)	80	80	120	80	120
Maximum PSI	175	175	175	175	175
Pump Model	APP2I0524T	APP4V1043T	APP3Y1544T	APP4V1043T	APP3Y1544T
Outlet	NPT 3/4"	NPT 3/4"	NPT 1"	NPT 3/4"	NPT 1"
Weight (lbs.)	715	958	1095	958	1095
Dimensions: LxWxH	76"x30"x50"	76"x30"x50"	78"x32"x56"	76"x30"x50"	78"x32"x56"

* Based on B-10 Bearing Rating

5YR - Limited warranty on oil-lubricated air compressor pumps and tanks.

2YR - Limited warranty on all air compressor components.

**Does not apply to models featuring the WEG motor



ASME International

PIXPT0510H 8-09