# FRONT WIND BAFFLE WB-PA3 / WB-PA4 / WB-PA5

**DESIGNED FOR P-SERIES AND PUMY OUTDOOR UNITS ONLY** 

Job Name:	
System Reference:	Date:



WB-PA3 / WB-PA4 / WB-PA5

#### **GENERAL FEATURES**

- · WB-Series Wind Baffles allow P-Series outdoor units to operate at full capacity to 0° F DB cooling.

  • Allows PUMY outdoor units to operate to 23° F DB cooling.

  • Prevents wind from reversing outdoor fan rotation when un-energized.

- Durable, low maintenance construction.
- WB-PA3 Wind Baffle allows PUMY-P-NKMU1 outdoor units to operate down to 5° F DB at 100% capacity in cooling mode and down to -13° F DB in heating mode with a de-rate.

### **PLEASE NOTE**

- · Install outdoor units with the back surface facing wall side to eliminate the effects of external wind.
- Outdoor units should not be installed in an orientation or site where the wind blows directly at the back of the unit.
- Wind baffle should not be used where there is any obstacle at either side or above the outdoor unit as the discharged air will be blocked.


### **SPECIFICATIONS**


		WB-PA3	WB-PA4	WB-PA5	
	Color	Matches P-Series Outdoor Unit			
Exterior	Surface Treatment	Polyester Powder Paint			
	Material	Alloy Hot-Dip Zinc Coated Carbon Steel Sheet			
Weight	8 Lbs. 8 Oz. 7 Lbs. 9 oz 8 Lbs. 5 Oz.				

#### MODEL REQUIRED PER OUTDOOR UNIT


UNIT MODEL	Type and Quantity			
	WB-PA3	WB-PA4	WB-PA5	
PUY/Z-A24NHA4			1	
PUY/Z-A30NHA4			1	
PUY/Z-A36NHA4			1	
PUY/Z-A42NHA4			2	
PUY/Z-A42NHA5			2	
PUZ-HA30NHA4			2	
PUZ-HA36NHA4			2	
PUZ-HA30NHA5			2	
PUZ-HA36NHA5			2	
PUZ-HA42NKA	2			
PUMY-P36NHMU			2	
PUMY-P36NKMU1	2			
PUMY-P48NHMU			2	
PUMY-P48NKMU1	2			
PUMY-P60NKMU1	2			
PUY/Z-A24NHA6			1	
PUY/Z-A30NHA6			1	
PUY/Z-A36NHA6			1	
PUY/Z-A42NHA6			2	
PUY/Z-A12NKA7		1		
PUY/Z-A18NKA7		1		
PUY/Z-A24NHA7			1	
PUY/Z-A30NHA7			1	
PUY/Z-A36NKA7	2			
PUY/Z-A42NKA7	2			

# **DIMENSIONS: WB-PA3**

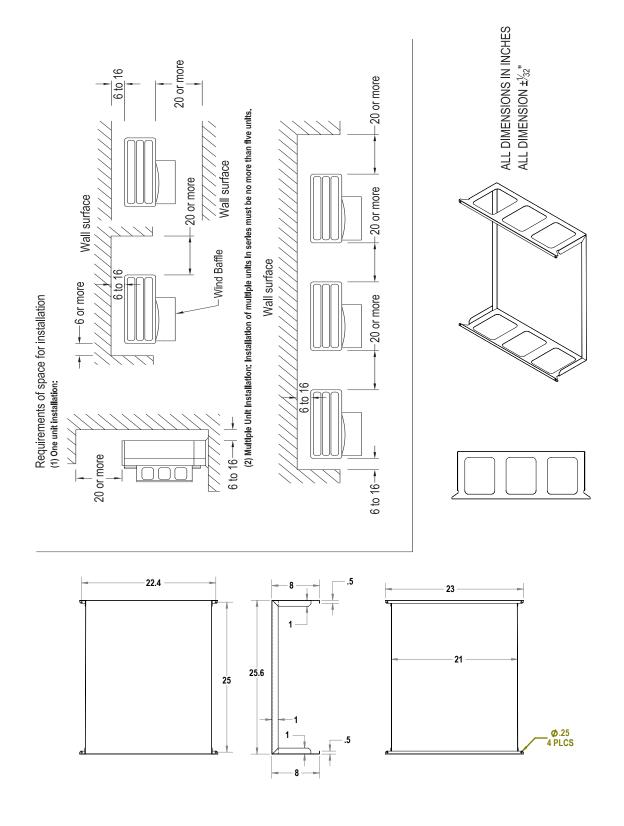

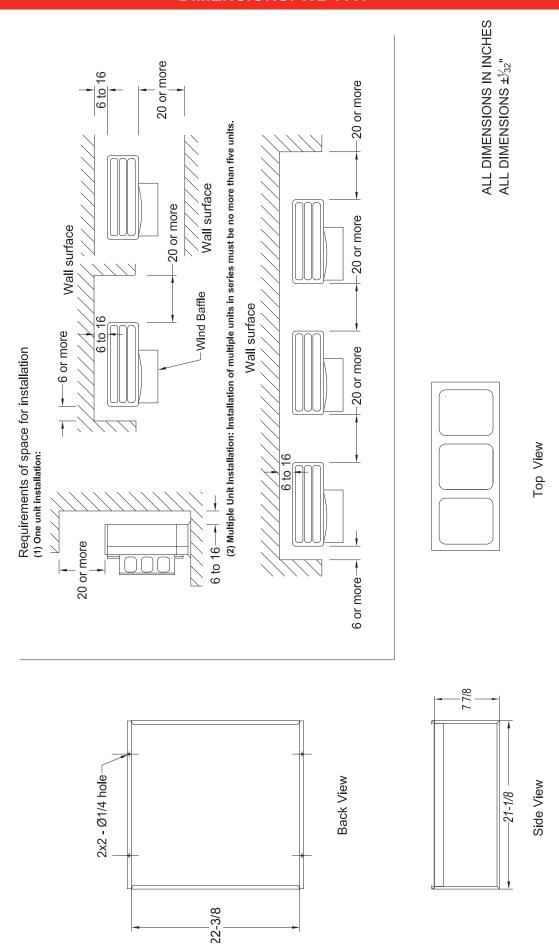

# **DIMENSIONS: WB-PA5**

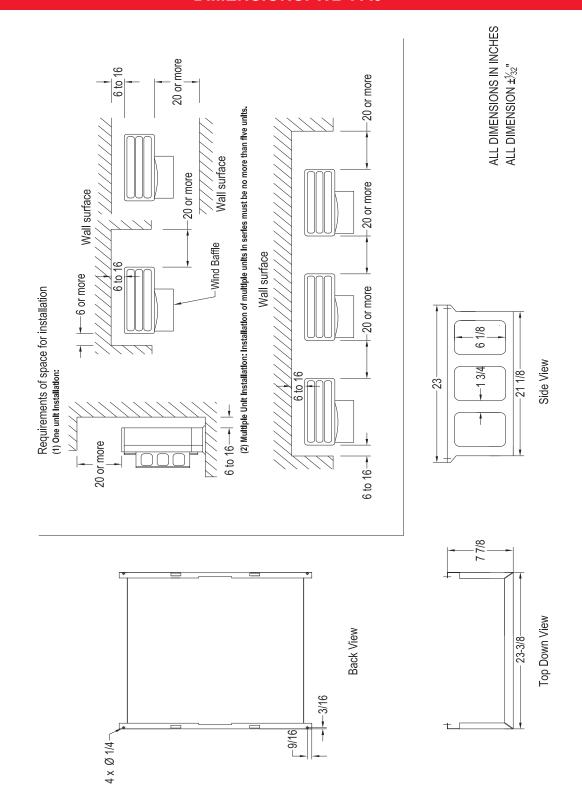

## Manufactured for MITSUBISHI ELECTRIC US, INC.

1340 Satellite Boulevard. Suwanee, GA 30024 Toll Free: 800-433-4822 www.mehvac.com