


- ✓ Designed for professional cleaning
- ✓ With fluid recovery port
- ✓ High durability
- ✓ Height-adjustable



**TECHNICAL DATA**

<b>Pressure</b>	5000 psi 7300 psi
<b>Temperature</b>	250°F
<b>Inlet</b>	1/4" NPTM 3/8" NPTF 1/2" NPTF

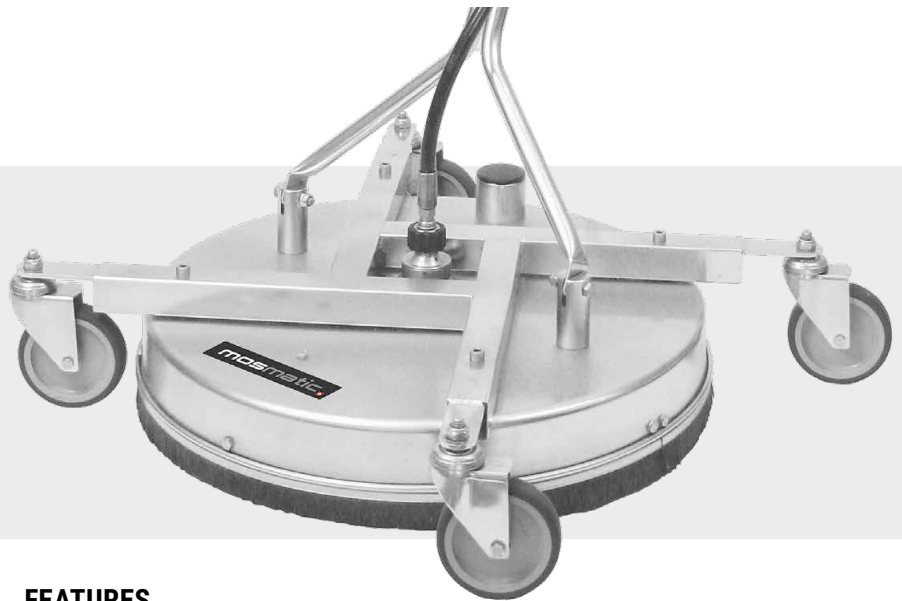

**FL-AH 750**




**FL-AH 520**

**FEATURES**

**Recovery System**

Environmental protection is more important than ever, leading to the need to recycle waste water. The dual housing and vacuum port allow this function.

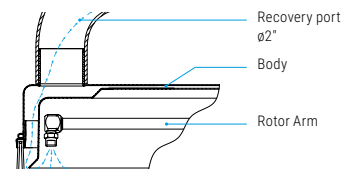

Residual water and debris can be recovered, recycled and reused.

**Adjustable Height**

Stainless steel frame for added stability. Height adjustable housing ensures the best cleaning results.



**Stainless Steel Caster (Premium Quality)**

Four 4" stainless steel casters with custom mounting brackets ensure easy manoeuvring even in confined spaces.  
Part No. 80.956

**Rotor Arms**

Can withstand up to 7300 psi, and are precision welded and balanced.



**2cp2 (2 Arms / 2 Nozzles)**

Part No. 82.946 (ø18.5"), 1/8"  
Part No. 82.941 (ø18.5"), 1/4"  
Optional: Part No. 82.9069 (ø17.7"), 1/8"

**3cp3 (3 Arms / 3 Nozzles)**

Part No. 82.947 (ø27.5"), 1/8"

**4p4 (4 Arms / 4 Nozzles)**

Part No. 82.9133 (ø18.5"/13.8"), 1/4"  
Part No. 82.9108 (ø27"/23.6"), 1/4"

**Swiss Engineering**

High rpm stainless steel swivel features reinforced self lubricated stainless steel ball bearings for improved performance. The dual spring based carbide seal system, guarantees long lasting operation under tough conditions.



**DYCI Swivel**

Part No. 55.253

**DXTI Swivel**

Part No. 39.910

**DYDI Swivel (7300 psi)**

Part No. 55.263

Name	Part No.	ø	NW	Weight	Swivel	Rotor Arm	HP- Nozzles	HP- Gun	Stainless Steel Caster
<b>FL-AH 520</b>	<b>80.784</b>	21"	1/4"	35.5 lbs	1x DYCI	2x 1/8" NPTF	2x 1503	1x	4x ø4"
<b>FL-AH 520*</b>	<b>80.797</b>	21"	1/2"	44 lbs	1x DXTI	4x 1/4" NPTF	4x 1503	1x	4x ø4"
<b>FL-AH 750</b>	<b>80.785</b>	30"	1/4"	51.8 lbs	1x DYCI	3x 1/8" NPTF	3x 1503	1x	4x ø4"
<b>FL-AH 750*</b>	<b>80.798</b>	30"	1/2"	57.3 lbs	1x DXTI	4x 1/4" NPTF	4x 1503	1x	4x ø4"
<b>FL-AHY 750**</b>	<b>80.389</b>	30"	1/4"	50.7 lbs	1x DYDI	3x 1/8" NPTF	--	--	4x ø4"

\* Inlet 1/2" NPTF \*\* Pressure: 7300 psi / Inlet 1/4" NPTM