

WINCO®

W6010DE

Features

Kohler KD440 Engine

This diesel engine has the reliability and longevity you've come to expect from Kohler.

Low Oil Protection

In the event there is low oil pressure, the engine will shut down, which will protect the engine from damage.

Powder Coat Paint

For an incredibly durable finish.

Sturdy Wrap-Around Welded Tubular Cradle

Redesigned 14 gauge tubular cradle.

LED Indicator Lights

LED lights provide warning indicators for Electric System OK, Low Oil Pressure, and Battery Charging Circuitry.

Premium Square D Circuit Breakers


Providing clear and instant identification of a tripped circuit with a Visi-Trip indicator.

100% Load Tested

You won't find statistical sampling here. We load test every generator before it leaves our facility.

INDUSTRIAL DIESEL

6,010 Starting Watts
5,160 Running Watts

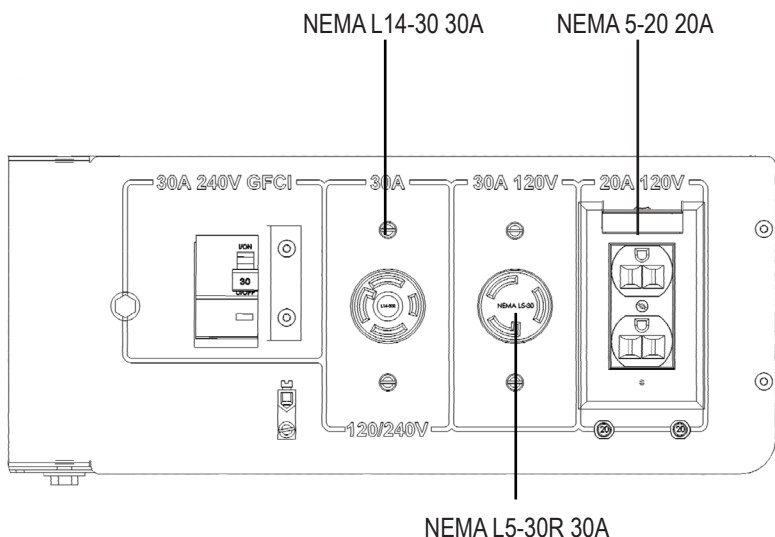

Optional Accessories

Two Wheel, Flat-Free Dolly Kit

Portability is important to get your generator where it needs to be.

Generator Cover

When your generator is not in use, you will want to keep it dust and debris free.

Plug-In Line Voltage Monitor

For when you want to verify the voltage output.

30 Amp (NEMA L14-30P) Plug

You supply the cord you need. We provide the plug.

Maintenance Kit

Keep the engine at its peak performance to ensure the generator will be ready when needed most.

Battery

Interstate Group U1 300 CCA.

GENERATOR

STARTING WATTS	6,010
RUNNING WATTS	5,160
RUNNING AMPS @ 120 VAC	43
RUNNING AMPS @ 240 VAC	21.5
VOLTAGE REGULATION	CAPACITOR +/-5%
FREQUENCY REGULATION ⁽¹⁾	+/-1.5%
MAIN CIRCUIT BREAKER	30 AMP, 240V (GFCI)
BONDED NEUTRAL	YES
120 VOLT RECEPTACLES	(2) NEMA 5-20 20A (GFCI) (1) NEMA L5-30R 30A (GFCI)
120/240 VOLT RECEPTACLES	(1) NEMA L14-30 30A (GFCI)
GENERATOR WARRANTY ⁽²⁾	3 YR COMMERCIAL

NOTES: (1) Steady state frequency regulation. (2) For generator warranty information contact your local WINCO service center.

GENSET

MOTOR STARTING (CODE G) ⁽¹⁾	2 HP
SOUND DATA ⁽²⁾ FULL LOAD	87.6
LIFTING EYE ⁽³⁾	STANDARD
2-WHEEL DOLLY KIT	OPTIONAL
SHIP WEIGHT	268 LBS
FREIGHT CLASS	70
PROTECTIVE ROLL FRAME	1.25" DIA. 14 GAUGE STEEL
ASSEMBLED IN	USA
EPA APPROVED	YES
CARB APPROVED	TIER IV FINAL
CSA APPROVED	NO
UNIT WARRANTY ⁽⁴⁾	3 YEARS COMMERCIAL

NOTES: (1) Code G capacitor start motor. (2) All measurements are in db(a). Tested at 7 meters (23 ft.) (3) Shipping eye shipped loose. (4) For more generator warranty information contact your local WINCO dealer.

ENGINE

ENGINE BRAND	KOHLER
ENGINE MODEL	KD440
ENGINE STARTER	ELECTRIC
ENGINE SPEED	3600 RPM
ENGINE CYLINDERS	SINGLE
DISPLACEMENT/TYPE	440 CC / OHV
LOW OIL PROTECTION	STANDARD
RECOMMENDED OIL ⁽¹⁾	10W-30
OIL CAPACITY	1.6 QT
FUEL TANK	7 GAL
FUEL GAUGE	YES
FULL LOAD RUN TIME ⁽²⁾	11.7 HOURS
TIME METER	INCLUDED
BATTERY SIZE ⁽³⁾	BCI GROUP U1 300CCA
ENGINE WARRANTY ⁽⁴⁾	3 YR COMMERCIAL

NOTES: (1) The recommended oil is for normal applications. See operator's manual for the recommended oil for your needs. (2) Run time is estimated. (3) Battery not included (4) Contact your local Kohler service center for engine warranty assistance.

DIMENSIONS


DIMENSIONS	34.5" x 24.6" x 23.4"
NET WEIGHT	252 LBS

NOTE: Dimensions are L x W x H. Add 3" height if lifting eye is installed. Add 6" height if dolly kit is installed.

SHIPPING

SHIPPING DIMENSIONS	36.4" x 28.4" x 32.4"
SHIP WEIGHT	268 LBS
FREIGHT CLASS	70

NOTE: Dimensions are L x W x H

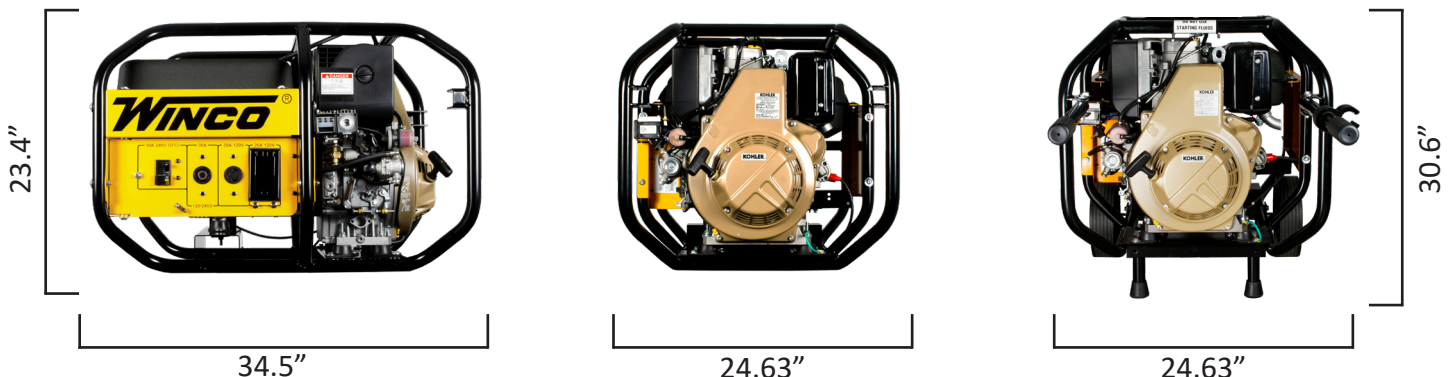

Specifications are subject to change without notice.